


Output Plug
and Polarity are
Dependent on
Customer
Requirements

Inner Box Dimensions:

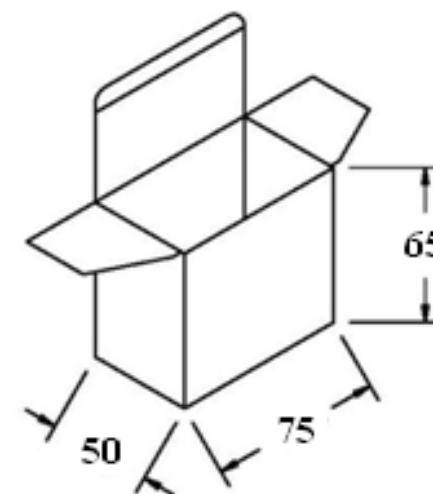

General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +24VDC/0~700mA Regulated
- DC Cord: 5FT, 20AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -10°C~+70°C
- Operating/Storage Humidity: 20%~80%RH/ 10%~90%RH
- Approvals: UL/CUL/FCC/LPS/PSE/BSMI/CCC/IRAM/RCM/TUV/CE/WEEE/ROHS/V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: .35 Lbs
- Carton Quantity: 60 Pcs
- Interchangeable Input Plugs Available As A Set
Or Sold Individually (Country Specific).

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-24V0-0A7-U30	PART TITLE	Energy Efficient 24VDC/ 0.7A Universal Input Power Supply
PART NUMBER	SA-240A7P	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	11.19.2013		
APPROVAL	CB		
UNIT	mm		
REV	Ø		