

SSCD052SH THRU SSCD056SH

FEATURES

- * Halogen-free type
- * Compliance to RoHS product
- * Lead less chip form, no lead damage
- * Low power loss, High efficiency
- * High current capability, low VF
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0

APPLICATION

- * Switching mode power supply applications
- * Portable equipment battery applications
- * General rectification
- * DC / DC Converter
- * Telecommunication

MECHANICAL DATA

Case : Packed with FRP substrate and epoxy underfilled

Terminals : Pure Tin plated (Lead-Free),
solderable per MIL-STD-750, Method 2026.

Polarity : Laser Cathode band marking

Weight : 0.012 gram

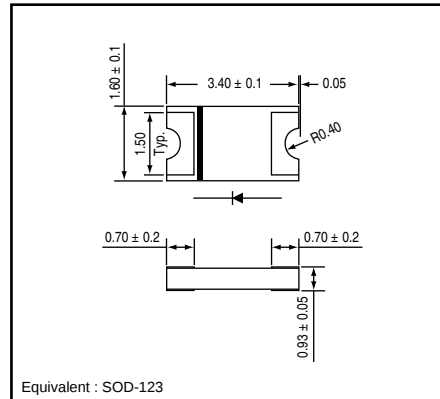
PACKING

- * 3,000 pieces per 7" (178mm ± 2mm) reel
- * 4 reels per box
- * 6 boxes per carton


OUTLINE DIMENSIONS

Case : 1206-S

Unit : mm



MARKING

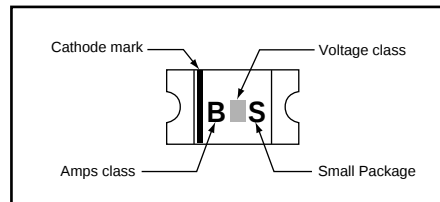

Absolute Maximum Ratings (Ta = 25 °C)





ITEM	Symbol	Conditions	Rating			Unit
			SSCD052SH	SSCD054SH	SSCD056SH	
Repetitive peak reverse voltage	V _{RRM}		20	40	60	V
Average forward current	I _{F(AV)}		0.5			A
Peak forward surge current	I _{FSM}	8.3ms single half sine-wave	15			A
Junction temperature	T _j		125			°C
Operating temperature range	T _{opr}		-40 to +125		-55 to +150	
Storage temperature range	T _{STG}		-55 to +125		-55 to +150	

Electrical characteristics (Ta = 25 °C)

ITEM	Symbol	Conditions	Type	Min.	Typ.	Max.	Unit
Forward voltage (NOTE 1)	V _F	I _F = 0.1A	SSCD052SH	-	0.32	-	V
		I _F = 0.3A		-	0.36	-	
		I _F = 0.5A		-	0.40	0.42	
		I _F = 0.1A	SSCD054SH	-	0.35	-	
		I _F = 0.3A		-	0.40	-	
		I _F = 0.5A		-	0.45	0.48	
		I _F = 0.1A	SSCD056SH	-	0.40	-	
		I _F = 0.3A		-	0.45	-	
		I _F = 0.5A		-	0.48	0.55	
Repetitive peak reverse current (NOTE 1)	I _{RRM}	V _R = Max. V _{RRM} , T _a = 25 °C		-	10	50	uA
Junction capacitance	C _j	V _R = 4V, f = 1.0 MHz		-	120	-	pF
Thermal resistance	R _{th(JA)}	Junction to ambient (NOTE 2)		-	88	-	°C/W
	R _{th(JL)}	Junction to lead (NOTE 2)		-	28	-	°C/W

NOTES : (1) Pulse test width PW=300usec , 1% duty cycle.

(2) Mounted on P.C. board with 0.2 x 0.2"(5.0 x5.0mm) copper pad areas.

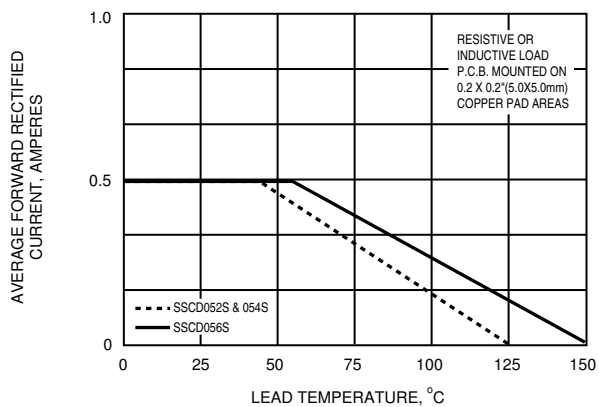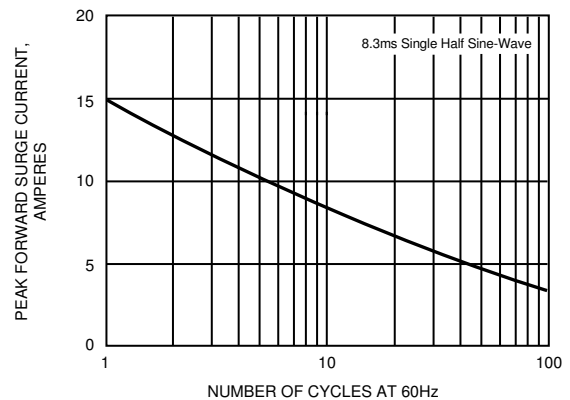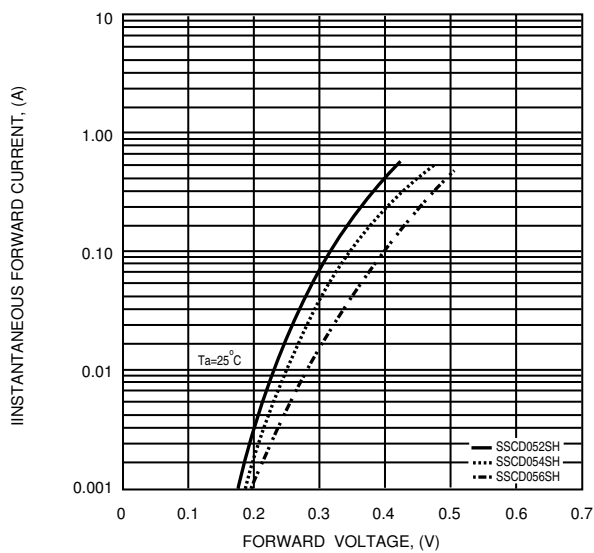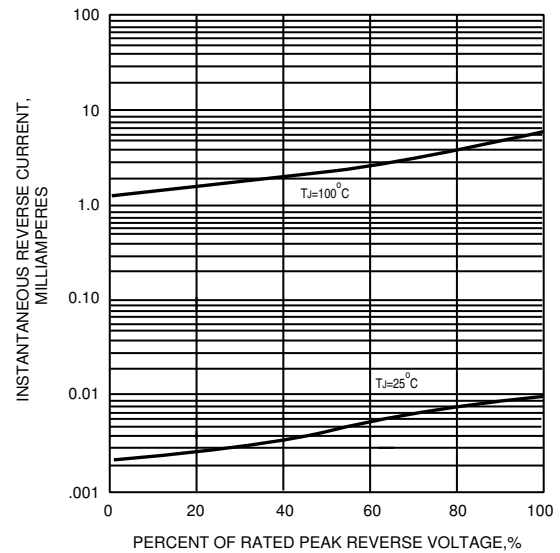FIG.1 - FORWARD CURRENT DERATING CURVE

FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

FIG.4 - TYPICAL REVERSE CHARACTERISTICS

FIG.5 - TYPICAL JUNCTION CAPACITANCE
