

SCD345H

● **FEATURES**

- * Halogen-free type
- * Compliance to RoHS product
- * Lead less chip form, no lead damage
- * Low power loss, High efficiency
- * High current capability, low VF
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0

● **APPLICATION**

- * Switching mode power supply applications
- * Portable equipment battery applications
- * High frequency rectification
- * DC / DC Converter
- * Telecommunication


● **MECHANICAL DATA**

Case : Packed with FRP substrate and epoxy underfilled
Terminals : Pure Tin plated (Lead-Free), solderable per MIL-STD-750, Method 2026.
Polarity : Laser Cathode band marking
Weight : 0.02 gram


● **PACKING**

- * 3,000 pieces per 7" (178mm ± 2mm) reel
- * 4 reels per box
- * 6 boxes per carton

● **OUTLINE DIMENSIONS**

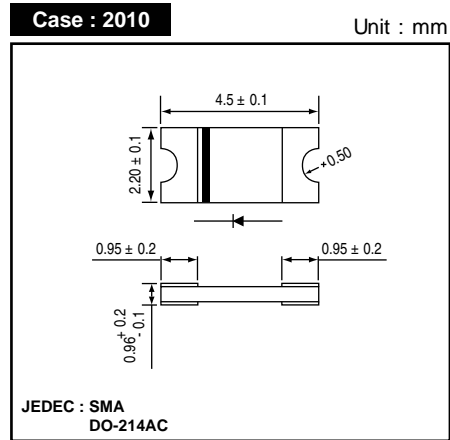

● **MARKING**

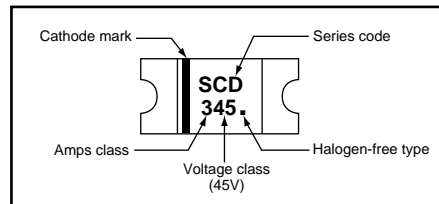

Absolute Maximum Ratings (Ta = 25 °C)

| ITEM | Symbol | Conditions | Rating | Unit |
|--------------------------------------|--------|-----------------------------|-------------|------|
| Repetitive peak reverse voltage | VRRM | | 45 | V |
| Average forward current | IF(AV) | | 3.0 | A |
| Peak forward surge current | IFSM | 8.3ms single half sine-wave | 80 | A |
| Operating junction temperature Range | Tj | | -55 to +125 | °C |
| Storage temperature Range | TSTG | | -55 to +150 | °C |

Electrical characteristics (Ta = 25 °C)

| ITEM | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|---------|------------------------------|------|------|------|------|
| Forward voltage (NOTE 1) | VF | IF = 3.0A | - | 0.46 | 0.50 | V |
| Repetitive peak reverse current | IRRM | VR = Max. VRRM, Ta = 25 °C | - | 0.02 | 0.20 | mA |
| Junction capacitance | Cj | VR = 4V, f = 1.0 MHz | - | 120 | - | pF |
| Thermal resistance | Rth(JA) | Junction to ambient (NOTE 2) | - | 86 | - | °C/W |
| | Rth(JL) | Junction to lead (NOTE 2) | - | 20 | - | °C/W |
| | Rth(JC) | Junction to case (NOTE 2) | - | 15 | - | °C/W |

NOTES : (1) Pulse test width PW=300usec, 1% duty cycle.
 (2) Mounted on P.C. board with 0.2 x 0.2"(5.0 x5.0mm) copper pad areas.