

SUGC10DH THRU SUGC10KH
● FEATURES

- * Halogen-free type
- * Compliance to RoHS product
- * GPRC (Glass passivated rectifier chip) inside
- * Lead less chip form, no lead damage
- * For surface mounted applications
- * Low power loss, High efficiency
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0

● APPLICATION

- * Switching mode power supply applications
- * Portable equipment battery applications
- * General rectification
- * DC / DC Converter
- * Telecommunication

● MECHANICAL DATA

Case : Packed with FRP substrate and epoxy underfilled

Terminals : Pure Tin plated (Lead-Free),
solderable per MIL-STD-750, Method 2026.

Polarity : Laser Cathode band marking

Weight : 0.012 gram

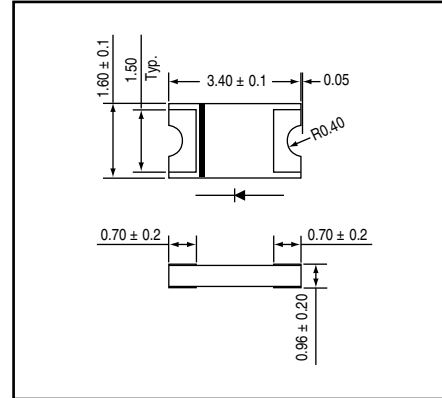
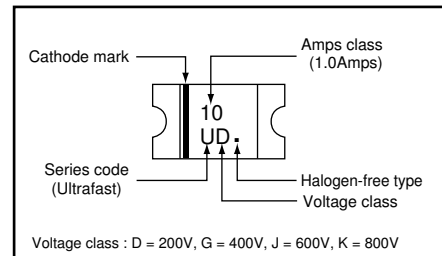
● PACKING

- * **3,000 pieces per 7" (178mm ± 2mm) reel**
- * **4 reels per box**
- * **6 boxes per carton**

● OUTLINE DIMENSIONS

Case : 1206-S

Unit : mm

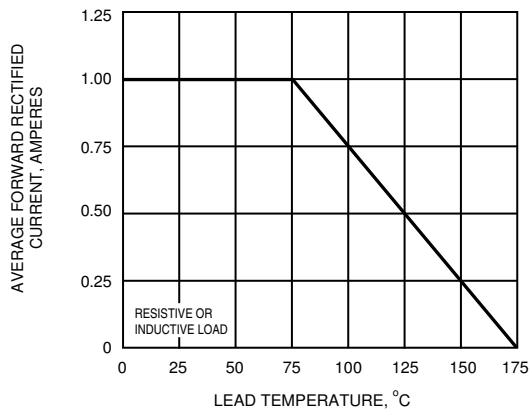
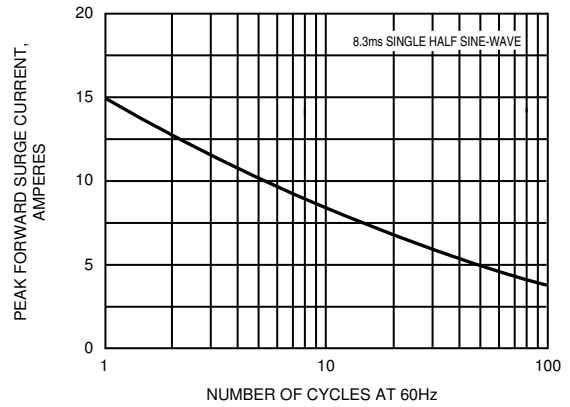
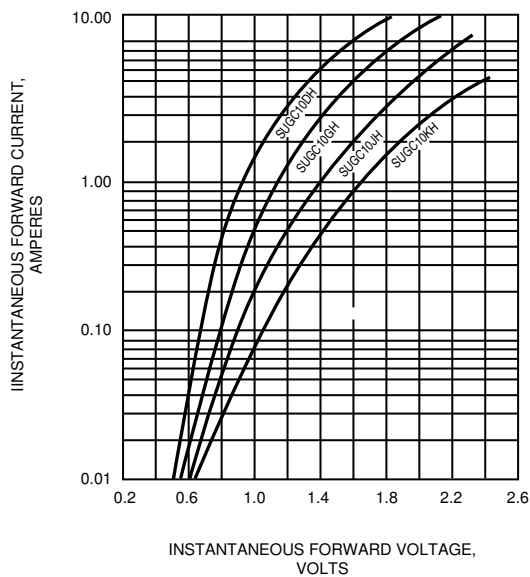
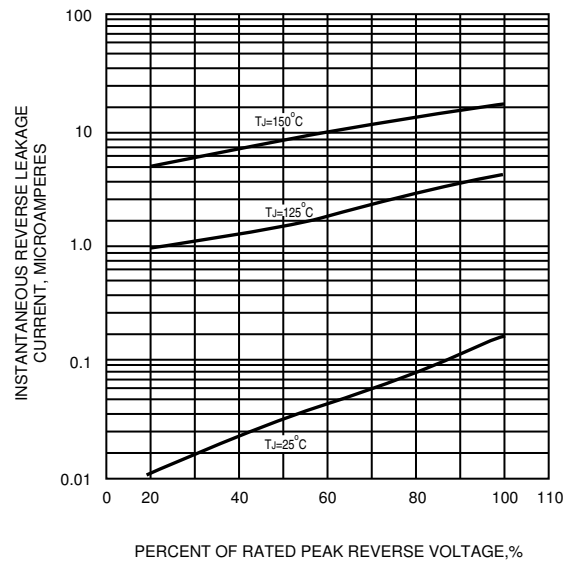

● MARKING

Absolute Maximum Ratings (Ta = 25 °C)

ITEM	Symbol	Conditions	SUGC10				Unit
			DH	GH	JH	KH	
Repetitive peak reverse voltage	VRRM		200	400	600	800	V
Average forward current	IF(AV)		1.0				A
Peak forward surge current	IFSM	8.3ms single half sine-wave	15				A
Reverse recovery time	Trr	IF = 0.5A, IR = 1.0A, Irr = 0.25A	35				nS
Operating junction and storage temperature Range	Tj,TSTG		-65 to +175				°C

Electrical characteristics

ITEM	Symbol	Conditions	Type	Min.	Typ.	Max.	Unit
Forward voltage	VF	IF = 1.0A	SUGC10DH	-	0.94	0.96	V
			SUGC10GH	-	1.15	1.30	
			SUGC10JH	-	1.40	1.70	
			SUGC10KH	-	1.65	2.50	
Repetitive peak reverse current	IRRM	VR = Max. VRRM, Ta = 25 °C		-	0.20	5	uA
Junction capacitance	Cj	VR = 4V, f = 1.0 MHz		-	8	-	pF
Thermal resistance	Rth(JA)	Junction to ambient (Note)		-	126	-	°C/W
	Rth(JL)	Junction to lead (Note)		-	55	-	

NOTES : Thermal resistance from junction to ambient and from junction to lead P.C.B. mounted on 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas.

FIG.1 - FORWARD CURRENT DERATING CURVE

FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

FIG.4 - TYPICAL REVERSE CHARACTERISTICS

FIG.5 - TYPICAL JUNCTION CAPACITANCE
