

**WBGC30DH THRU WBGC30MH**
**● FEATURES**

- \* Halogen-free type
- \* Lead free product, compliance to RoHS
- \* GPRC (Glass passivated rectifier chip) inside
- \* Glass passivated cavity-free junction
- \* Lead less chip form, no lead damage
- \* Low forward voltage drop
- \* Plastic package has Underwriters Laboratory Flammability Classification 94V-0

**● APPLICATION**

- \* General purpose rectification
- \* Surge absorption

**● MECHANICAL DATA**

**Case :** Packed with FRP substrate and epoxy underfilled

**Terminals :** Pure Tin plated (Lead-Free), solderable per MIL-STD-750, Method 2026.

**Polarity :** Cathode Band, Laser marking

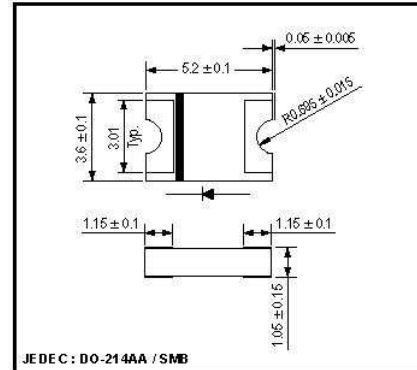
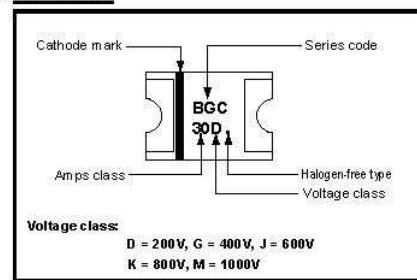
**Weight :** 0.04 gram

**● PACKING**

- \* 5,000 pieces per 13" (330mm ± 2mm) reel
- \* 2 reels per box
- \* 5 boxes per carton

**● OUTLINE DIMENSIONS**
**Case : 2114**

Unit : mm

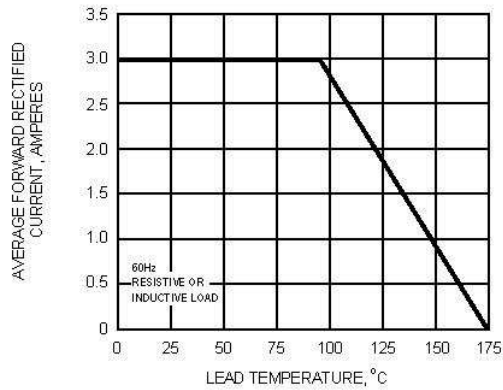
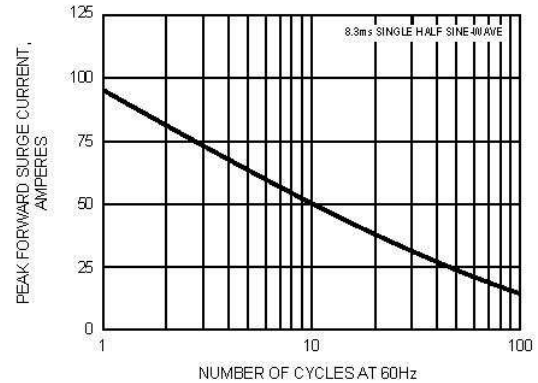
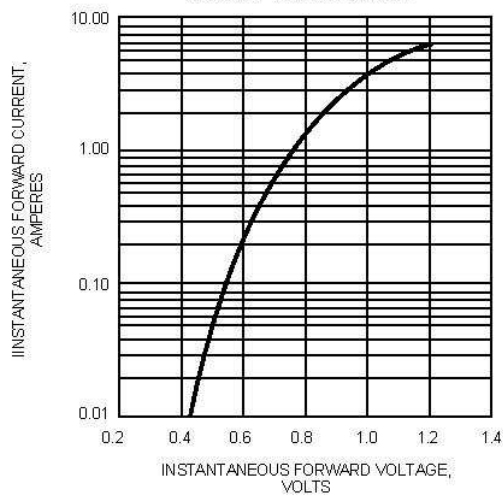
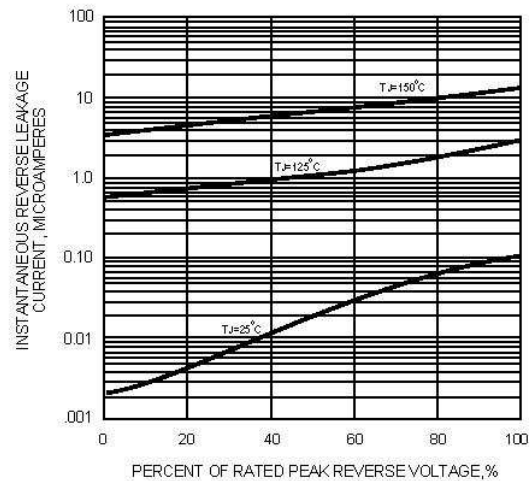
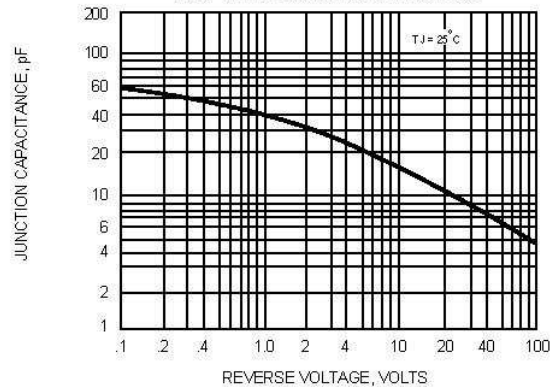

**● MARKING**

**Absolute Maximum Ratings (Ta = 25 °C)**

| ITEM                                                     | Symbol             | Rating      |          |          |          |          | Unit |
|----------------------------------------------------------|--------------------|-------------|----------|----------|----------|----------|------|
|                                                          |                    | WBGC30DH    | WBGC30GH | WBGC30JH | WBGC30KH | WBGC30MH |      |
| Repetitive peak reverse voltage                          | V <sub>RRM</sub>   | 200         | 400      | 600      | 800      | 1000     | V    |
| Average forward current                                  | I <sub>F(AV)</sub> | 3.0         |          |          |          |          | A    |
| Peak forward surge current (8.3ms single half sine-wave) | I <sub>FSM</sub>   | 95          |          |          |          |          |      |
| Operating junction temperature Range                     | T <sub>J</sub>     | -65 to +175 |          |          |          |          | °C   |
| Storage temperature Range                                | T <sub>STG</sub>   | -65 to +175 |          |          |          |          |      |

**Electrical characteristics (Ta = 25 °C)**

| ITEM                            | Symbol              | Conditions                                          | Min. | Typ. | Max. | Unit |
|---------------------------------|---------------------|-----------------------------------------------------|------|------|------|------|
| Forward voltage                 | V <sub>F</sub>      | I <sub>F</sub> = 3.0A                               | -    | 0.94 | 1.00 | V    |
| Repetitive peak reverse current | I <sub>RRM</sub>    | V <sub>R</sub> = Max. V <sub>RRM</sub> , Ta = 25 °C | -    | 0.10 | 5    | uA   |
| Junction capacitance            | C <sub>J</sub>      | V <sub>R</sub> = 4V, f = 1.0 MHz                    | -    | 23   | -    | pF   |
| Thermal resistance              | R <sub>th(JA)</sub> | Junction to ambient (NOTE)                          | -    | 74   | -    | °C/W |
|                                 | R <sub>th(JL)</sub> | Junction to lead (NOTE)                             | -    | 10   | -    |      |

NOTES : Thermal resistance from junction to ambient and from junction to lead P.C.B. mounted on 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas.

**FIG.1 - FORWARD CURRENT DERATING CURVE**

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

**FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

**FIG.5 - TYPICAL JUNCTION CAPACITANCE**

**MaxMEGA**

DISTRIBUTED BY: MAXMEGA ELECTRONICS PTE LTD  
 63, HILLVIEW AVE #09-19  
 LAM SOON INDUSTRIAL BUILDING  
 SINGAPORE 669569  
 TEL: +65 6769 1118  
 FAX: +65 6769 2221  
 EMAIL: maxsales@maxmega.com  
 WEBSITE: www.maxmega.com