

WBSCD32H THRU WBSCD310H
FEATURES

- * Halogen-free type
- * Compliance to RoHS product
- * Lead less chip form, no lead damage
- * Low power loss, High efficiency
- * High current capability, low VF
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0

APPLICATION

- * Switching mode power supply applications
- * Portable equipment battery applications
- * High frequency rectification
- * DC / DC Converter
- * Telecommunication

MECHANICAL DATA

Case : Packed with FRP substrate and epoxy underfilled

Terminals : Pure Tin plated (Lead-Free), solderable per MIL-STD-750, Method 2026.

Polarity : Laser Cathode band marking

Weight : 0.042 gram

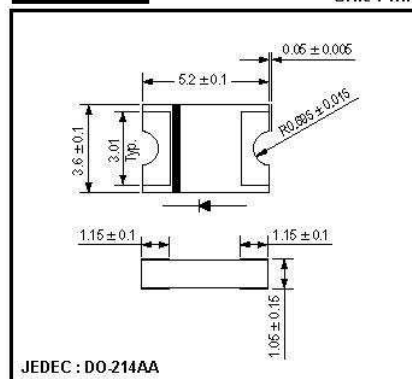
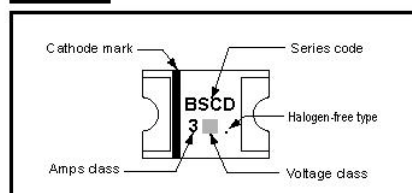
PACKING

- * 5,000 pieces per 13" (330mm ± 2mm) reel
- * 2 reels per box
- * 5 boxes per carton

OUTLINE DIMENSIONS

Case : 2114

Unit : mm


MARKING

Absolute Maximum Ratings (Ta = 25 °C)

ITEM	Symbol	Conditions	Rating				Unit
			WBSCD32H	WBSCD34H	WBSCD36H	WBSCD310H	
Repetitive peak reverse voltage	VRRM		20	40	60	100	V
Average forward current (SEE FIG.1)	IF(AV)		3.0				A
Peak forward surge current	IFSM	8.3ms single half sine-wave	80				A
Operating junction temperature Range	Tj		-55 to +125		-55 to +150		°C
Storage temperature Range	TSTG		-55 to +150				°C

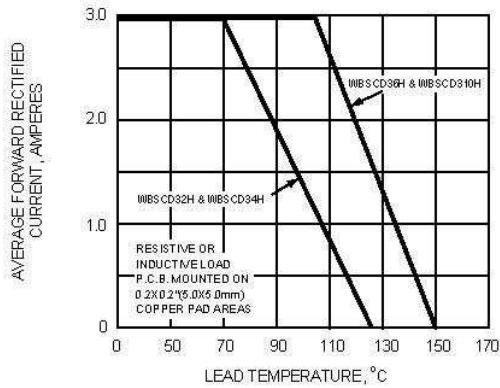
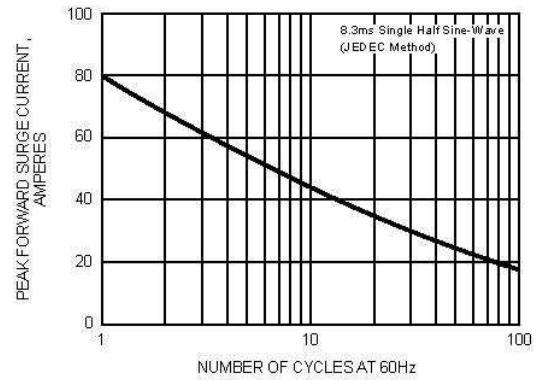
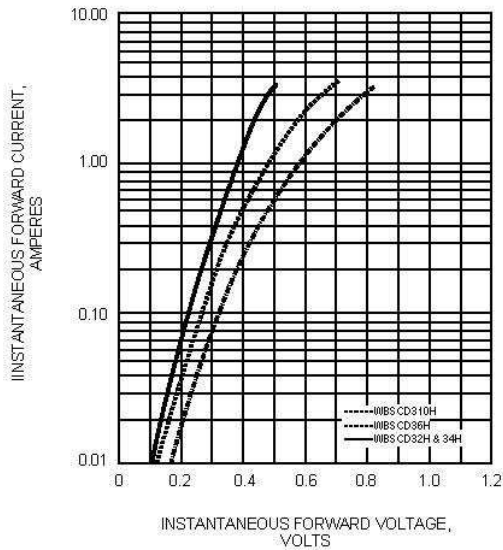
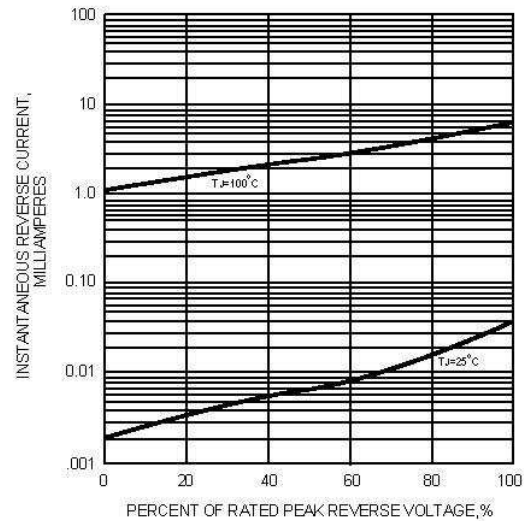
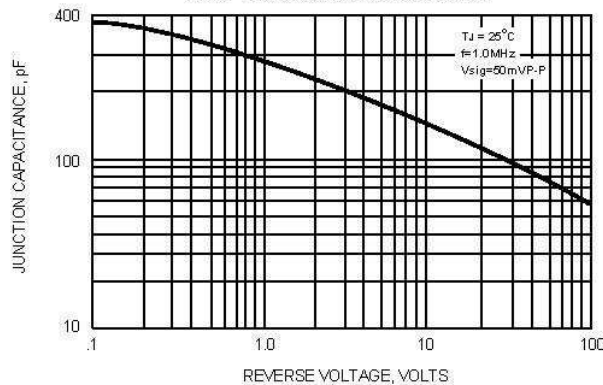
Electrical characteristics (Ta = 25 °C)

ITEM	Symbol	Conditions	Type	Min.	Typ.	Max.	Unit
Forward voltage (NOTE 1)	VF	IF = 0.5A	WBSCD32H	-	0.35	-	V
		IF = 1.0A	/	-	0.40	-	
		IF = 3.0A	WBSCD34H	-	0.48	0.50	
		IF = 0.5A	WBSCD36H	-	0.38	-	V
		IF = 1.0A		-	0.48	-	
		IF = 3.0A		-	0.65	0.70	
		IF = 0.5A	WBSCD310H	-	0.48	-	V
		IF = 1.0A		-	0.58	-	
		IF = 3.0A		-	0.78	0.85	
Repetitive peak reverse current	IRRM	VR = Max. VRRM, Ta = 25 °C		-	0.04	0.20	mA
Junction capacitance	Cj	VR = 4V, f = 1.0 MHz		-	180	-	pF
Thermal resistance	Rth(JA)	Junction to ambient (NOTE 2)		-	55	-	°C/W
	Rth(JL)	Junction to lead (NOTE 2)		-	17	-	°C/W

NOTES : (1) Pulse test width PW=300usec, 1% duty cycle.

(2) Mounted on P.C. board with 0.2 x 0.2"(5.0 x5.0mm) copper pad areas.

(3) Preliminary draft.

FIG.1 - FORWARD CURRENT DERATING CURVE

FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

FIG.4 - TYPICAL REVERSE CHARACTERISTICS

FIG.5 - TYPICAL JUNCTION CAPACITANCE

MaxMega

DISTRIBUTED BY: MAXMEGA ELECTRONICS PTE LTD
 63, HILLVIEW AVE #09-19
 LAM SOON INDUSTRIAL BUILDING
 SINGAPORE 669569
 TEL: +65 6769 1118
 FAX: +65 6769 2221
 EMAIL: maxsales@maxmega.com
 WEBSITE: www.maxmega.com