

WZ4GP20JLH THRU WZ4GP20MLH

FEATURES

- * Halogen-free type
- * Internal structure with GPRC (glass passivated rectifier chip) inside
- * Compliance to RoHS product
- * Lead less chip form, no lead damage
- * Low power loss, High efficiency
- * High current capability
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Patented ZPAK™ Package Technology

APPLICATION

- * AC/DC Power Supply
- * Communication Equipment

MECHANICAL DATA

Case : Packed with FRP substrate and epoxy underfilled
Terminals : Pure Tin plated (Lead-Free),
solderable per MIL-STD-750, Method 2026.
Polarity : Laser marking symbols
Weight : 0.11 gram

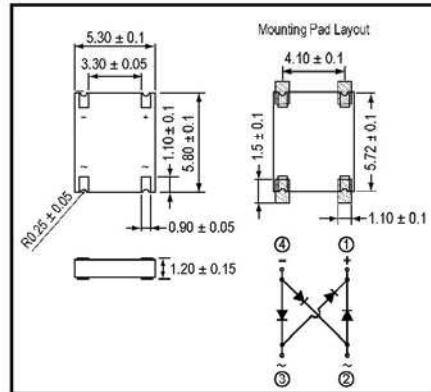
PACKING

- * 5,000 pieces per 13" (330mm ± 2mm) reel
- * 2 reels per box
- * 5 boxes per carton


OUTLINE DIMENSIONS

Case : Z4PAK

Unit : mm



MARKING

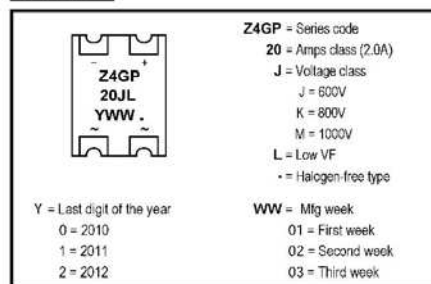






Absolute Maximum Ratings (Ta = 25 °C)

ITEM	Symbol	Conditions	Rating			Unit
			WZ4GP20JLH	WZ4GP20KLH	WZ4GP20MLH	
Repetitive peak reverse voltage	VRRM		600	800	1000	V
Average forward current	IF(AV)		2.0			A
Peak forward surge current	IFSM	8.3ms single half sine-wave	60			A
Operating junction and storage temperature Range	Tj, TSTG		-55 to +175			°C

Electrical characteristics (Ta = 25 °C)

ITEM	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward voltage	VF	IF = 2.0A	-	0.92	0.95	V
Repetitive peak reverse current	IRRM	VR = Max. VRRM, Ta = 25 °C	-	0.08	5	uA
Current squared time	I²t	t < 8.3ms, Ta = 25 °C	-	14.9	-	A²s
Junction capacitance	Cj	VR = 4V, f = 1.0 MHz	-	35	-	pF
Thermal resistance	Rth(JA)	Junction to ambient (NOTE)	-	80	-	°C/W
	Rth(JL)	Junction to lead (NOTE)	-	20	-	

NOTES : Mounted on P.C.B. with 1.5 x 1.0mm copper pads.

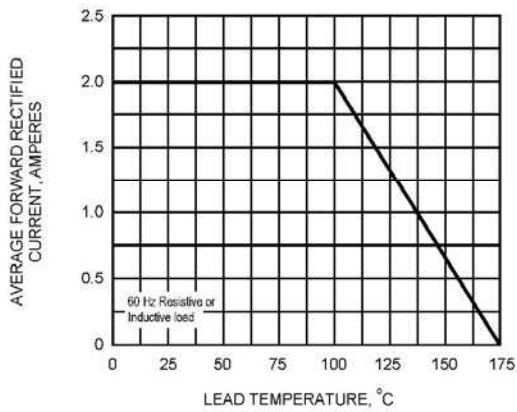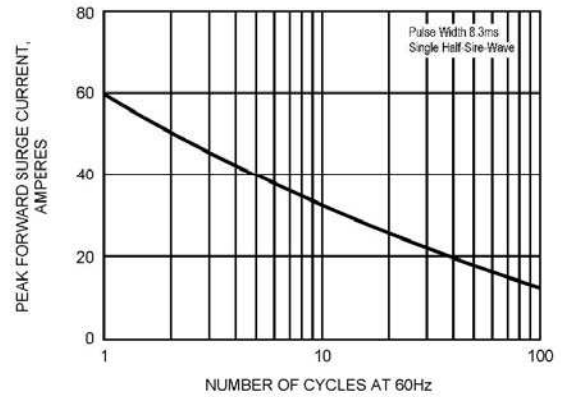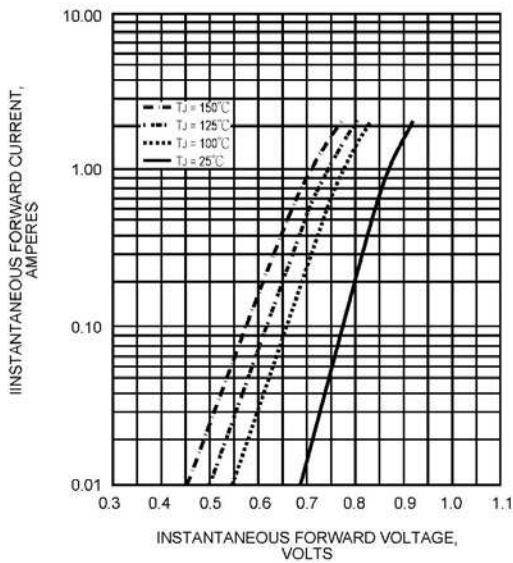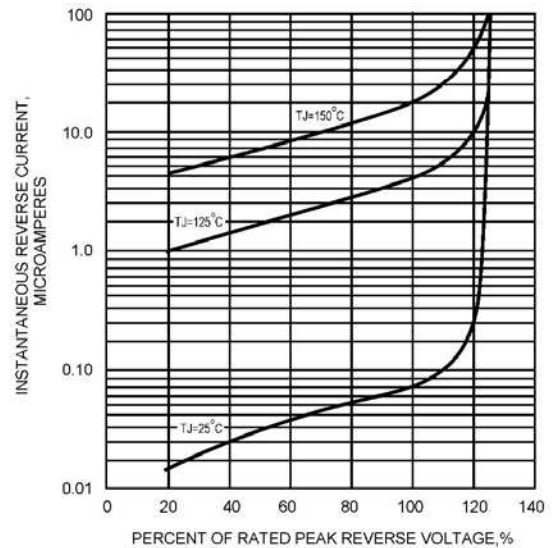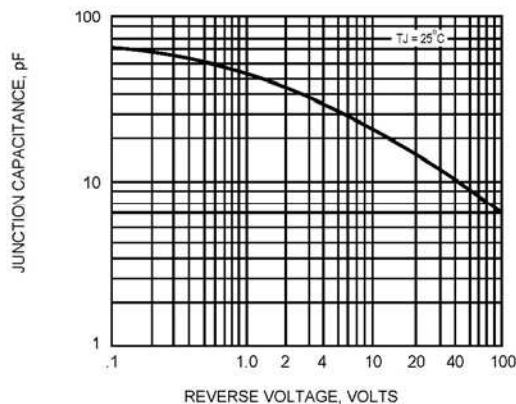FIG. 1 - FORWARD CURRENT DERATING CURVE

FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

FIG. 4 - TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

FIG. 5 - TYPICAL JUNCTION CAPACITANCE

MaxMEGA

DISTRIBUTED BY: MAXMEGA ELECTRONICS PTE LTD
63, HILLVIEW AVE #09-19
LAM SOON INDUSTRIAL BUILDING
SINGAPORE 669569
TEL: +65 6769 1118
FAX: +65 6769 2221
EMAIL: maxsales@maxmega.com
WEBSITE: www.maxmega.com