TPS 2534 - Dual Channel Thermopile

Two Thermopiles with Individual Infrared Filters



Description

The dual thermopile sensor **TPS 2534** employs two single thermopile chips mounted in a TO-5 housing with a 40 k Ω thermistor as temperature reference. The cap has two windows of size 2.3 x 2.6 mm² each which can be equipped with different infrared bandpass filters. The sensor is perfectly suited to gas detection by IR absorption.


For further information please refer to the TPS 2534 product note.


Features


- Thermistor Temperature Reference Included
- Applications: Infrared Absorption (NDIR) Gas Sensing with Reference Channel




TPS 2534 - Dual Channel Thermopile Two Thermopiles with Individual Infrared Filters

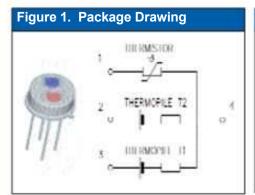




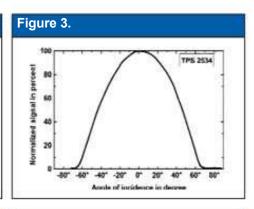



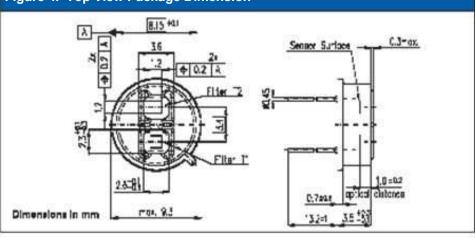



Parameter	Typical	Units	Condition
Sensitive area	2x 1.2 x 1.2	mm²	absorbing area
Window size	2.3 x 2.6	mm²	each channel
DC sensitivity	42	V/W	500K BB w/o filter
Resistance	30	kΩ	
Noise	30	nV/√Hz	r.m.s. 300K
NEP	10.7	nW/√Hz	500K BB w/o filter
D*	2.3 x 10 ⁸	cm√Hz/W	500K BB w/o filter
TC of sensitivity	-0.01	%/K	
TC of resistance	0.02	%/K	
Time constant	35	ms	
Operating temperature	-40 to 100	°C	non permanent
Storage temperature	-40 to 100	°C	non permanent
Thermistor resistance	30	kΩ	25°C
beta	3964	K	25°C/100°C
Field of view	2x 90	0	at 50% points

For more information email us at generalinquiries@excelitas.com or visit our website at excelitas.com All values are nominal; specifications subject to change without notice.

North America: Excelitas Technologies 16800 Trans-Canada Highway Kirkland, Quebec J7V 8P7 Canada Toll Free: (877) 734-OPTO (6786) Phone: +1-450-424-3300 Fax: +1-450-424-3411

Europe: Excelitas Technologies Wenzel-Jaksch-Str. 31 D-65199 Wiesbaden, Germany Phone: +49-611-492-430 Fax: +49-611-492-165

Excelitas Technologies 47 Ayer Rajah Crescent #06-12 Singapore 139947 Phone: +65-6770-4366 Fax: +65-6775-1008

