

MultiBlue™ Biotech CCD Camera System

USB 2.0 or IEEE-1394b (FireWire)



Overview

The MultiBlue™ Biotech CCD Camera System by Excelitas integrates scientific-grade CCD technology with the latest in camera electronics to offer users an unparalleled solution for OEMs' advanced biotechnology imaging applications. Featuring the Eastman Kodak KAI-0340SM imager, the MultiBlue provides pixel resolutions of 640 x 480 (7.4µm x 7.4µm pixel size). The modular design allows customization of the camera system with different imagers in minimum design time.

The MultiBlue camera series offers a 12-bit, 66 dB dynamic range. This high resolution output is achieved without

imager cooling. By concentrating on thermal handling while designing the MultiBlue camera, Excelitas eliminated any need for expensive cooling at moderate exposure times.

The MultiBlue Biotech CCD Camera System is shipped with an installation disk containing Windows® XP compatible demonstration software. Control over exposure, pixel binning, gain and offset adjustment is provided via the demonstration software. The MultiBlue also offers an external trigger input (for synchronization to peripheral equipment such as a strobe light), internal exposure control, and an output synchronization signal.

Key Features and Benefits

- ▶ **High Resolution 12-bit output depth with a 66 dB dynamic range.** Designed for a wide range of biotechnology applications.
- ▶ **Low noise of 20 electrons (typical).** Enables lower fluorescence and luminescence detection.
- ▶ **USB 2.0 or IEEE-1394b (FireWire) interfaces.** Provides easy integration and plug-and-play operation.
- ▶ **Precision readout of up to 40 frames per second for the USB 2.0 and 50 frames per second for the IEEE-1394b.** Allows capture of time resolved processes.
- ▶ **Temperature-stabilized design.** Eliminates need for cooling, thus reducing system power consumption.
- ▶ **Binning and programmable sub-array selection.** Increases signal strength and focus on desired ROI.
- ▶ **Easy system integration using Win32.dll software.** Drivers compatible with Windows XP® for quick development of biotechnology applications.
- ▶ **Interline Transfer CCD.** Delivers smear free, vibration-less CCD readout without periodic maintenance.

Sample Applications

- ▶ Gel documentation
- ▶ MicroArray
- ▶ MicroPlate readers
- ▶ DNA and protein sequencers
- ▶ Microscopy systems
- ▶ Fluorescence measurement
- ▶ Luminescence measurement

Figure 1. Quantum Efficiency

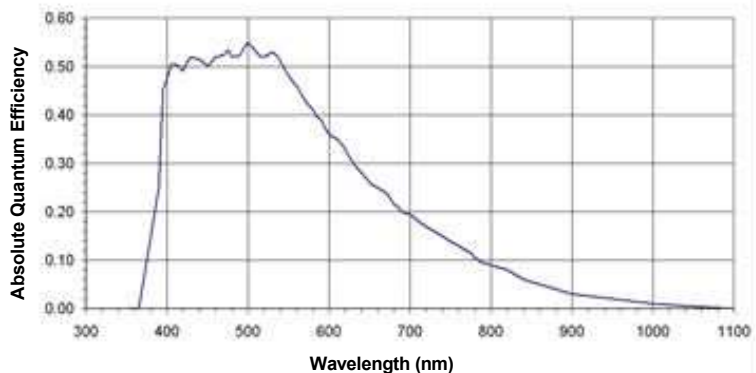


Table 1. Preliminary Specifications

Imager	Eastman Kodak KAI-0340SM
Pixel count	640 x 480
Pixel size	7.4 μm x 7.4 μm
Imager type	Interline
Full well capacity	40,000 e ⁻
Antiblooming protection	Yes (> 300X)
Spectral range	380 - 800 nm
Peak quantum efficiency	55% at 460 nm
Dark current	< 0.5 nA/cm ²
Digitization depth	14-bit
Dynamic range	66 dB
Read noise	~20 e ⁻
Max pixel data rate	20 MHz
Max full frame readout	40 FPS (USB 2.0), 50 FPS (IEEE-1394b)
Lens mount	C-Mount
Adjustments	Offset and gain
Capabilities	External trigger, exposure control
Pixel Bining	Yes, to 2 x 2
Area of interest	Yes
Data output format	USB 2.0 or IEEE-1394b (FireWire)
Total power consumption	< 7 W
Dimensions	68 mm x 114 mm x 114 mm (including lens mount)
Weight	32 oz.

Table 2. Stock Part Numbers

FD0604KNU-011	Camera, USB 2.0 interface
FD0604KNF-011	Camera, IEEE-1394b (FireWire) interface*
* MAC drivers are available upon request.	

Worldwide Headquarters
Excelitas Technologies
 44370 Christy Street
 Fremont, CA 94538 USA
 Telephone: (+1) 510-979-6500
 Toll Free (N. America): (800) 775-OPTO (6786)
 Fax: (+1) 510-687-1140
generalinquiries@excelitas.com

European Headquarters
Excelitas Technologies
 Wenzel-Jaksch-Str. 31
 D-65199 Wiesbaden, Germany
 Telephone: (+49) 611-492-430
 Fax: (+49) 611-492-165

Asia Headquarters
Excelitas Technologies
 47 Ayer Rajah Crescent #06-12
 Singapore 139947
 Telephone: (+65) 6775-2022
 Fax: (+65) 6775-1008

EXCELITAS
 TECHNOLOGIES

For a complete listing of our global offices, visit www.excelitas.com

©2011 Excelitas Technologies Corp. All rights reserved. The Excelitas logo and design are registered trademarks of Excelitas Technologies Corp. MultiBlue is a trademark of Excelitas Technologies Corp. or its subsidiaries, in the United States and other countries. All other trademarks not owned by Excelitas Technologies or its subsidiaries that are depicted herein are the property of their respective owners. Excelitas reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.