

TECHNICAL DATA
PART NUMBER SCP-5282-2, REV A.1

High Pulse Power Mil-STD-1275 Transzorb

Application:

- +28V DC systems
- Bi-Directional

Protection Level:

- MIL-STD-1275 Compliant; 100V Surge withstanding with 0.5-ohm source impedance
- Capable of handling 100A peak current, single 130 msec square current pulse
- 100% tested for 5 pulses of 100A, 50 msec square current pulse with 1 sec delay between pulses and 50°C base plate temperature

Key Features:

- Allows the use of 55V high efficiency FET
- Increase system reliability through eliminating avalanche FET operation
- Clamping below 55V DC for both 100V and 250V pulse
- High Pulse Power Capability
- Non-Hermetic version

Part Ordering Information:


- SCP-5282-2: with threaded terminals

Rating	Condition	Symbol	Min	Max	Units
Peak Pulse Power Dissipation	@ 25°C, 1ms	P_{pk}	-	60	KW
Steady State Power Dissipation	@ 25°C	P	-	40	Watts
Reverse Stand-Off Voltage	-	V_{WM}	-	33	Volts
Reverse Leakage	@ V_{WM}	I_D	-	25	μA
Breakdown Voltage	@ 10 mA	$V_{(BR)}$	36.7	-	Volts
Clamping Voltage	@ I_{PP}	V_c	-	49	Volts
Peak Pulse Current	-	I_{PP}		100	Amps
$T_{clamping}$	0 Volts to $V_{(BR)}$		-	$< 1 \times 10^{-8}$	Seconds
Operating & Storage Temp.	-	Top & Tstg	-55	+ 150	°C

Notes:

- SCP-5282 products require two additional #8-32 nuts in order to secure the connections (not provided). Nuts shall be hand-tightened prior the maximum 12 in-lb torque is applied. Caution: the high-speed torque drivers may cause thread damage on SCP-5282's copper screw terminals.

TECHNICAL DATA PART NUMBER SCP-5282-2, REV A.1

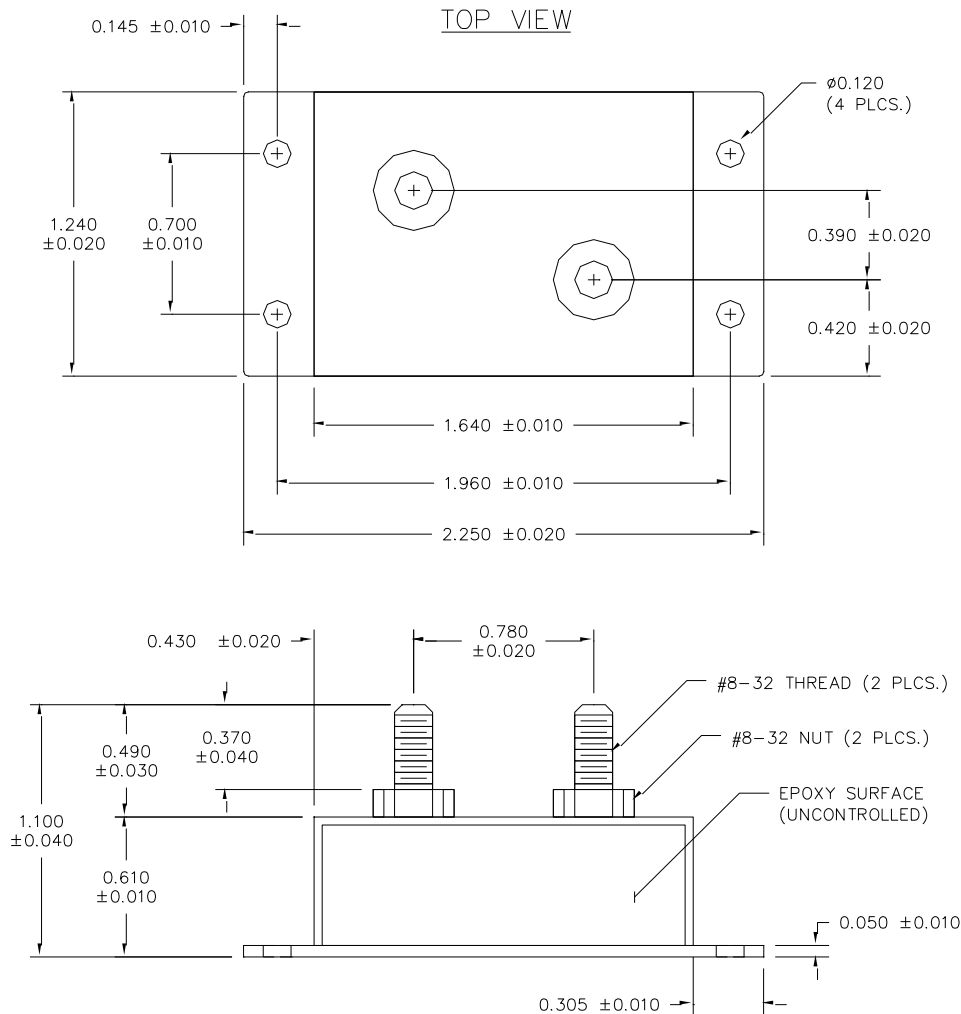

SCP-5282-2 (Threaded Terminals)

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.