


TECHNICAL DATA
DATA SHEET 665, REV -
Formerly Part Number SHD22510

HERMETIC POWER MOSFET N-CHANNEL



DESCRIPTION: 200 VOLT, 0.105 OHM, 27.4 A MOSFET IN A HERMETIC TO-254 PACKAGE.

MAXIMUM RATINGS


ALL RATINGS ARE AT $T_A = 25^\circ\text{C}$ UNLESS OTHERWISE SPECIFIED.

RATING	SYMBOL	MIN.	TYP.	MAX.	UNITS
GATE TO SOURCE VOLTAGE	V_{GS}	-	-	± 20	Volts
CONTINUOUS DRAIN CURRENT $V_{GS}=10\text{V}, T_C = 25^\circ\text{C}$ $V_{GS}=10\text{V}, T_C = 100^\circ\text{C}$	I_D	-	-	27.4 17	Amps
PULSED DRAIN CURRENT @ $T_C = 25^\circ\text{C}$	I_{DM}	-	-	110	Amps
OPERATING AND STORAGE TEMPERATURE	T_{OP}/T_{STG}	-55	-	150	$^\circ\text{C}$
TERMAL RESISTANCE JUNCTION TO CASE	$R_{\theta JC}$	-	-	0.83	$^\circ\text{C}/\text{W}$
TOTAL DEVICE DISSIPATION @ $T_C = 25^\circ\text{C}$	P_D	-	-	150	Watts

ELECTRICAL CHARACTERISTICS

DRAIN TO SOURCE BREAKDOWN VOLTAGE $V_{GS} = 0\text{V}, I_D = 1.0\text{mA}$	BV_{DSS}	200	-	-	Volts
DRAIN TO SOURCE ON STATE RESISTANCE $V_{GS} = 10\text{V}, I_D = 17\text{A}$ $V_{GS} = 10\text{V}, I_D = 27.4\text{A}$	$R_{DS(ON)}$	-	-	0.100 0.105	Ω
GATE THRESHOLD VOLTAGE $V_{DS} = V_{GS}, I_D = 250\mu\text{A}$	$V_{GS(th)}$	2.0	-	4.0	Volts
FORWARD TRANSCONDUCTANCE $V_{DS} \geq 15\text{V}, I_{DS} = 17\text{A}$	g_{fs}	9.0	-	-	S(1/ Ω)
ZERO GATE VOLTAGE DRAIN CURRENT $V_{DS} = 0.8 \times \text{Max. Rating}, V_{GS} = 0\text{V}$ $V_{DS} = 0.8 \times \text{Max. Rating}$ $V_{GS} = 0\text{V}, T_J = 125^\circ\text{C}$	I_{DSS}	-	-	25 250	μA
GATE TO SOURCE LEAKAGE FORWARD @ RATED GATE TO SOURCE LEAKAGE REVERSE V_{GS}	I_{GSS}	-	-	100 -100	nA
TOTAL GATE CHARGE $V_{GS} = 10\text{ VOLTS}$	Q_g	55	-	115	nC
GATE TO SOURCE CHARGE 50% RATED V_{DS}	Q_{gs}	8.0	-	22	
GATE TO DRAIN CHARGE RATED I_D	Q_{gd}	30	-	60	
TURN ON DELAY TIME $V_{DD} = 100\text{V}$	$t_{d(ON)}$	-	-	35	nsec
RISE TIME RATED I_D	t_r	-	-	190	
TURN OFF DELAY TIME $R_G = 2.35\Omega$	$t_{d(OFF)}$	-	-	170	
FALL TIME	t_f	-	-	130	
DIODE FORWARD VOLTAGE $T_J = 25^\circ\text{C}, I_S = 27.4\text{A},$ $V_{GS} = 0\text{V}$	V_{SD}	-	-	1.9	Volts
DIODE REVERSE RECOVERY TIME $T_J = 25^\circ\text{C}$	t_{rr}	-	-	950	nsec
REVERSE RECOVERY CHARGE $I_f = \text{RATED ID}$ $di/dt = 100\text{A}/\text{sec}$	Q_{rr}	-	-	9.0	μC
INPUT CAPACITANCE $V_{GS} = 0\text{ VOLTS}$	C_{iss}	-	3500	-	pF
OUTPUT CAPACITANCE $V_{DS} = 25\text{ VOLTS}$	C_{oss}	-	700	-	
REVERSE TRANSFER CAPACITANCE $f = 1\text{ MHz}$	C_{rss}	-	110	-	

MECHANICAL DIMENSIONS: in Inches / mm

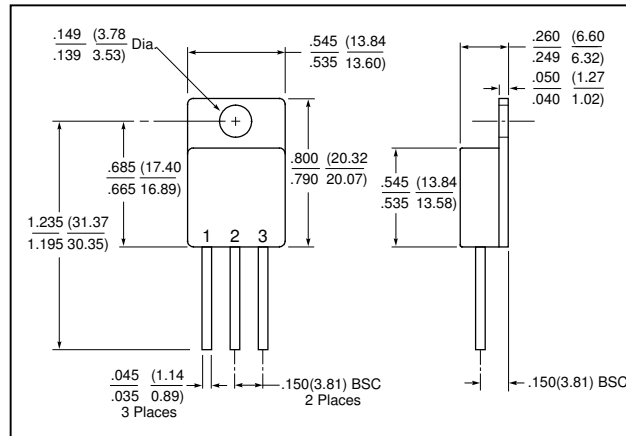

TO-254

PINOUT TABLE

DEVICE TYPE	PIN 1	PIN 2	PIN 3
N-CHANNEL MOSFET IN A TO-254 PACKAGE	DRAIN	SOURCE	GATE

TECHNICAL DATA

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.