



SURFACE MOUNT GLASS PASSIVATED RECTIFIER S2AA~ S2MA

Surface Mount Glass Passivated Rectifier

Features

- Glass passivated chip junction
- Built in strain relief
- High current capability
- Low forward voltage drop
- Fast switching speed for high efficiency
- High temperature Soldering guaranteed: 260°C/ 10 seconds at terminals
- RoHS and REACH compliance



DO-214AC (SMA)

RoHS
COMPLIANT

Mechanical Data

Case:	JEDEC DO-214AC(SMA), transfer molded plastic
Epoxy:	Meets UL 94V-0 flammability rating
Terminals:	Solder plated, solderable per MIL-STD 750, Method 2026
Polarity:	Cathode indicated by color band
Mounting position:	Any
Weight:	0.064 gram

Maximum Ratings ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Symbol	Description	S2AA	S2BA	S2DA	S2GA	S2JA	S2KA	S2MA	Unit	Conditions
V_{RRM}	Max Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
V_{RMS}	Max RMS Voltage	35	70	140	280	420	560	700	V	
V_{DC}	Max DC Blocking Voltage	50	100	200	400	600	800	1000	V	
I_(AV)	Max Average Forward Rectified Current at Ambient Temperature	1.5							A	TL=100°C (note 2)
I_{FSM}	Peak Forward Surge Current	50							A	8.3ms single half sine-wave (JEDEC)
t_{rr}	Maximum Reverse Recovery Time	2.0							μS	IF=0.5A, IR=1.0A, IRR=0.25A
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to +150							°C	

S2AA ~ S2MA
Electrical Characteristics ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Symbol	Description	S2AA	S2BA	S2DA	S2GA	S2JA	S2KA	S2MA	Unit	Conditions
V_F	Max Instantaneous Forward Voltage	1.15							v	$I_{F(AV)}= 1.0A$
I_R	Max DC Reverse Current at Rated DC Blocking Voltage	5							μA	$T_A=25^{\circ}C$
		125								$T_A=125^{\circ}C$
C_J	Typical Junction Capacitance	30							pF	At 1MHz, reversed voltage of 4V
$R_{\theta-JA}$	Typical Thermal Resistance	53							$^{\circ}C/W$	Note 2
$R_{\theta-JL}$		16								

Note:

1. Single phase, half wave, 60Hz, resistive or inductive load. Derate current by 20% for capacitive load
2. Thermal Resistance, PCB mounted

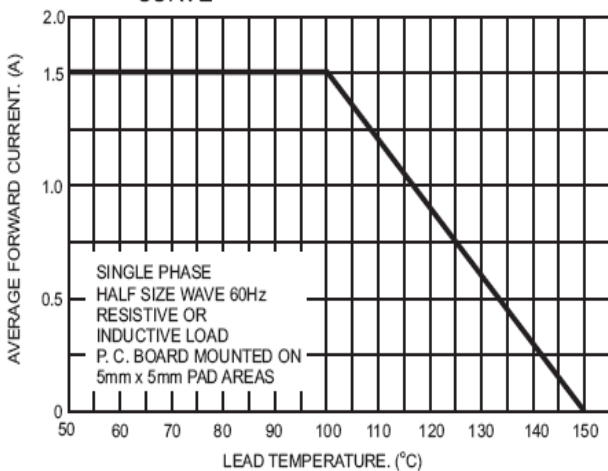
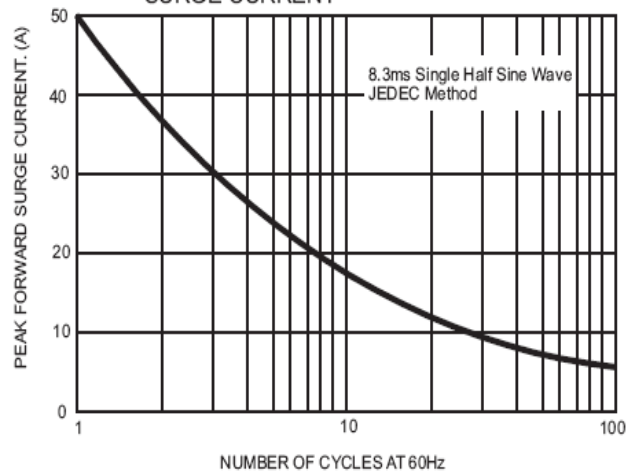
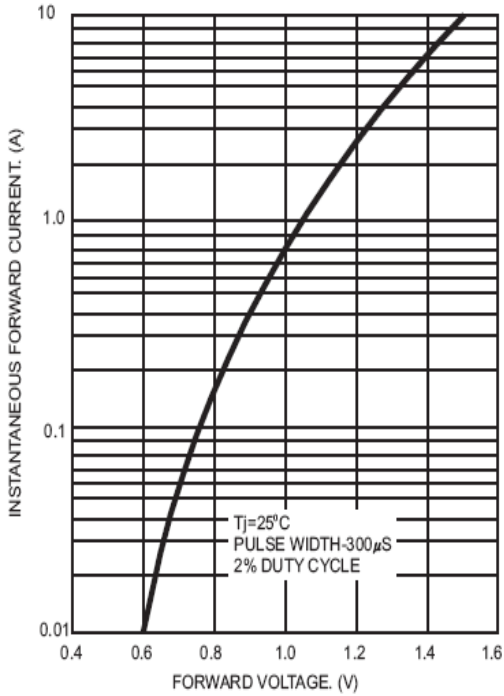
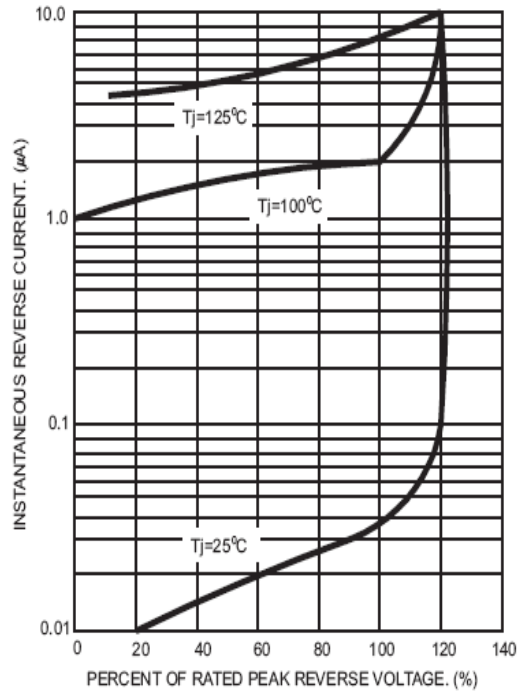
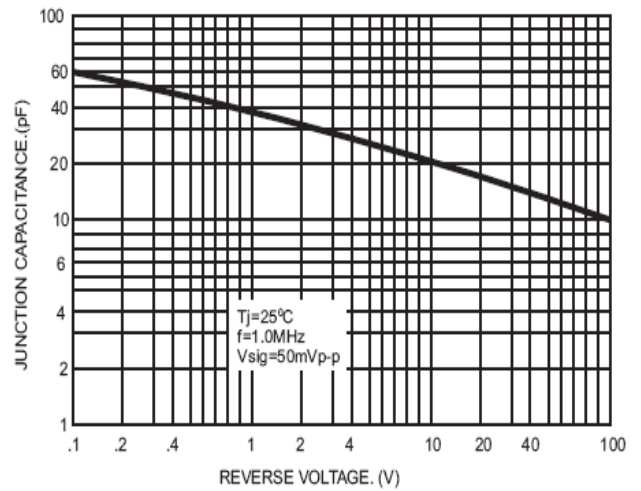
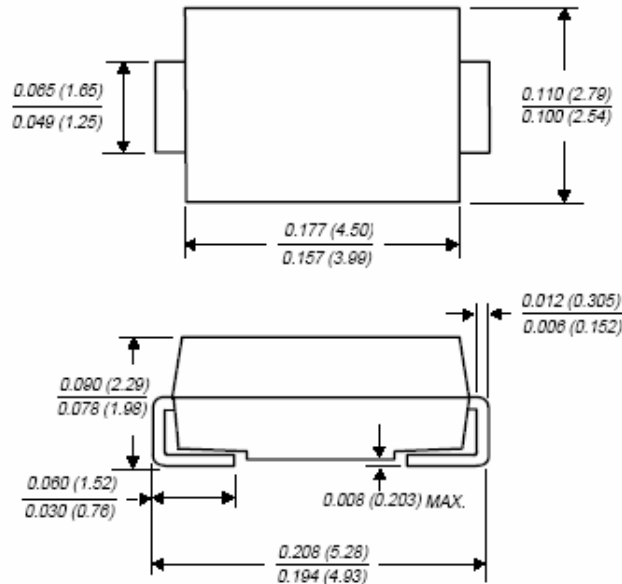
Typical Characteristics Curves
FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


FIG.3- TYPICAL FORWARD CHARACTERISTICS

FIG.4- TYPICAL REVERSE CHARACTERISTICS

FIG.5- TYPICAL JUNCTION CAPACITANCE


Dimensions in inch (mm)

*Dimensions in inches and (millimeters)***DO-214AC(SMA)****Contact us:****US HEADQUARTERS****MEI SEMI INC.**

2900 Corvin Drive, Santa Clara, CA95051, USA

Tel: 1-408-733-0808 Fax: 1-408-733-2828

CHINA FACTORY**MEI SEMI CO., LTD**

#259, South Hu Xi Road, Ma An Shan City, An Hui Province, 243000, China

Tel: 86-555-2109849 Fax: 86-555-3509998

#888, Guang Hua Road, Shanghai, 201108, China

Tel: 86-21-61509848 Fax: 86-21-64420756