


|      |   |
|------|---|
| DEPT | 1 |
| 1    | 1 |
| 2    |   |
| 3    |   |
| 4    | 2 |
| 5    |   |
| 6    |   |
| 7    |   |
| 8    |   |
| 9    |   |
| 10   |   |
| 11   | 8 |
| 12   |   |
| NC   |   |
| JZ   |   |


PART NAME: MALE TERMINAL

PART NO: 3000M 362/


TYPE 1

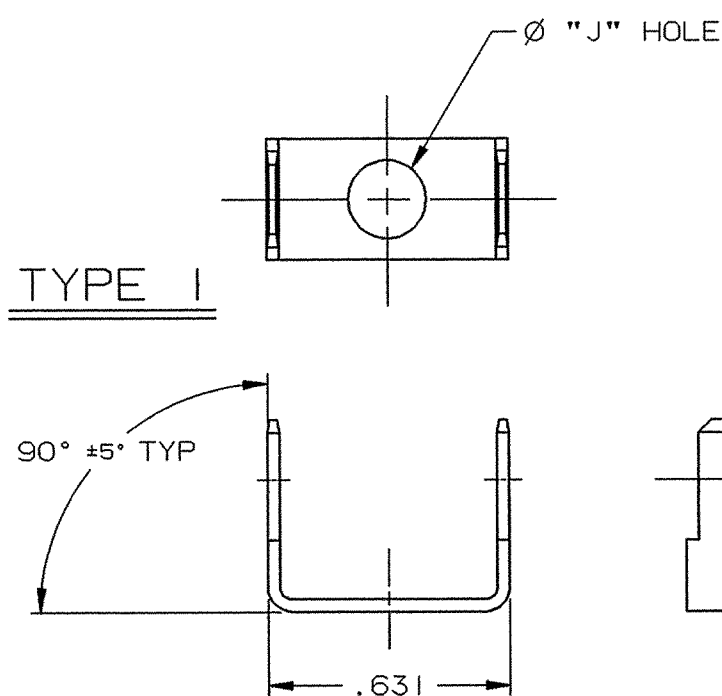


TYPE 5

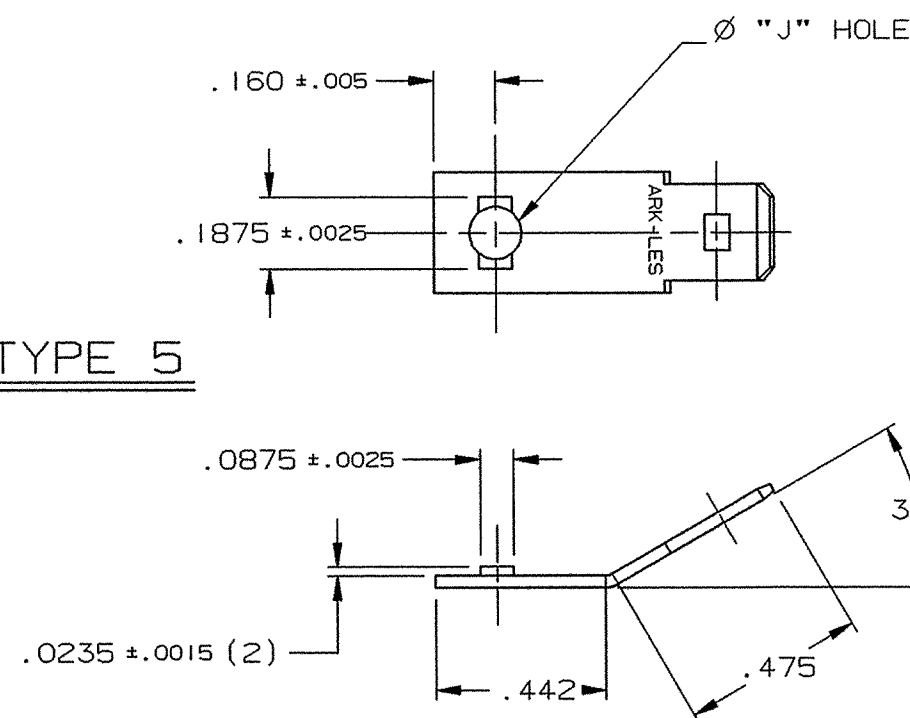


TYPE 6

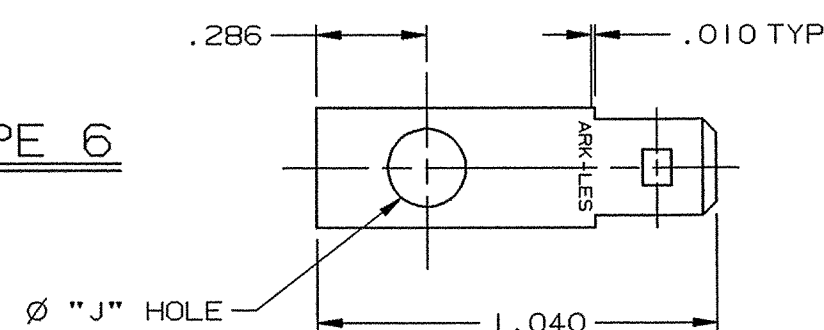


TYPE 2

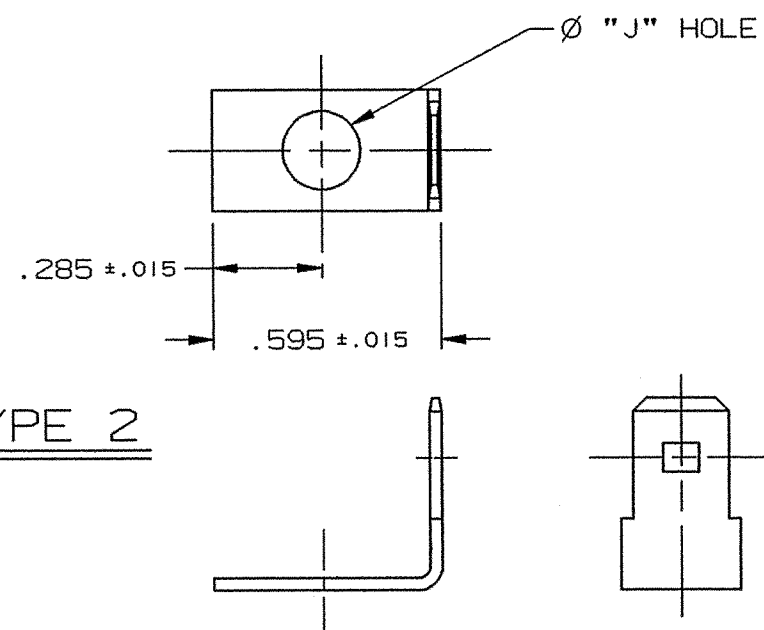


TYPE 7

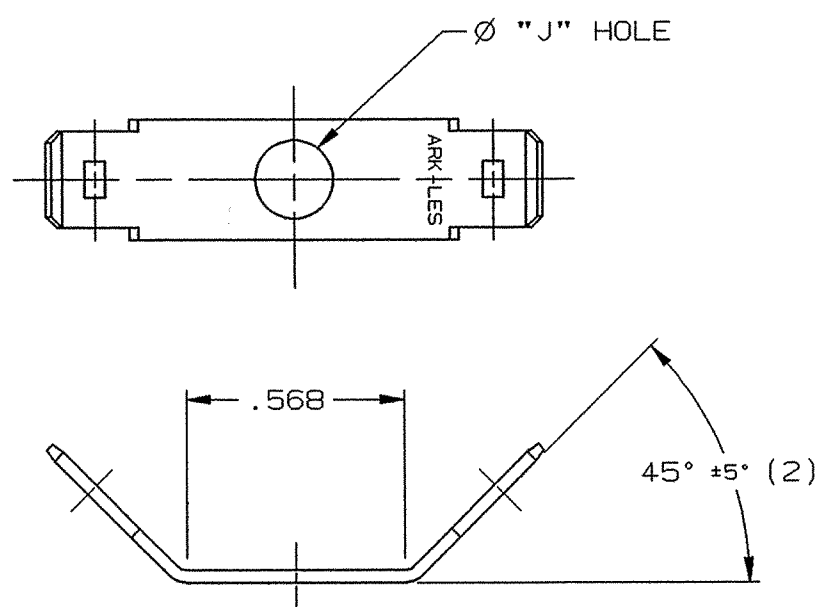



TYPE 3

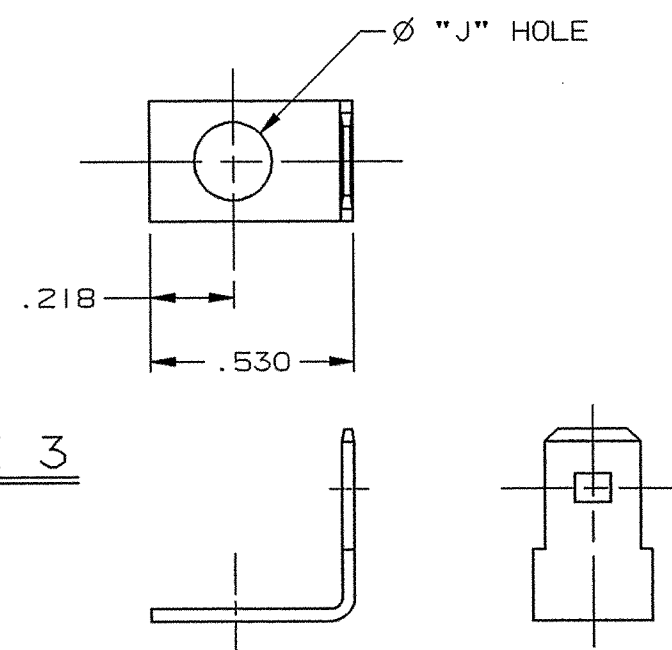


TYPE 4

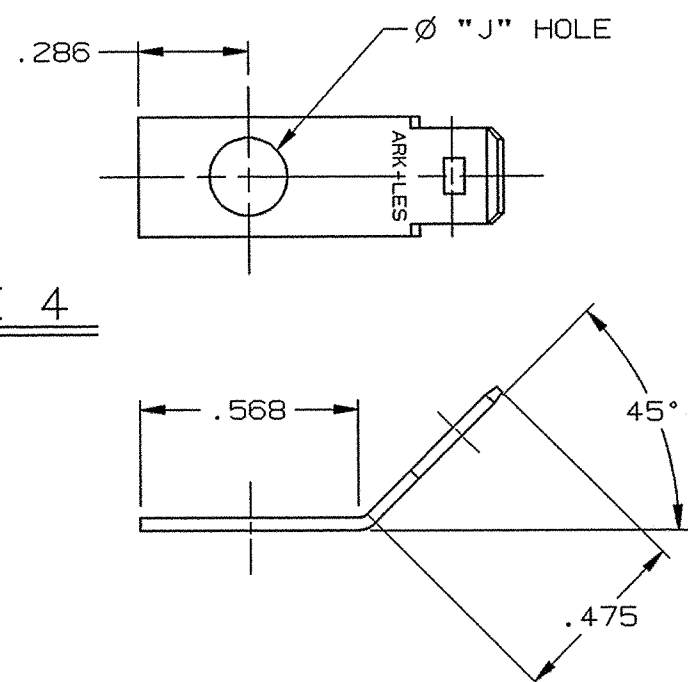

TAB #1

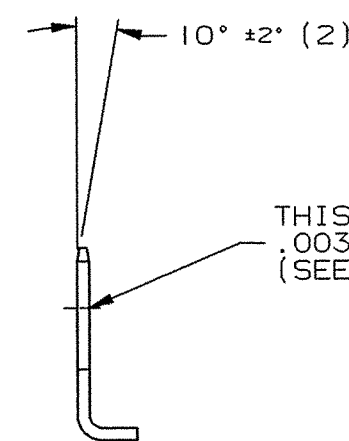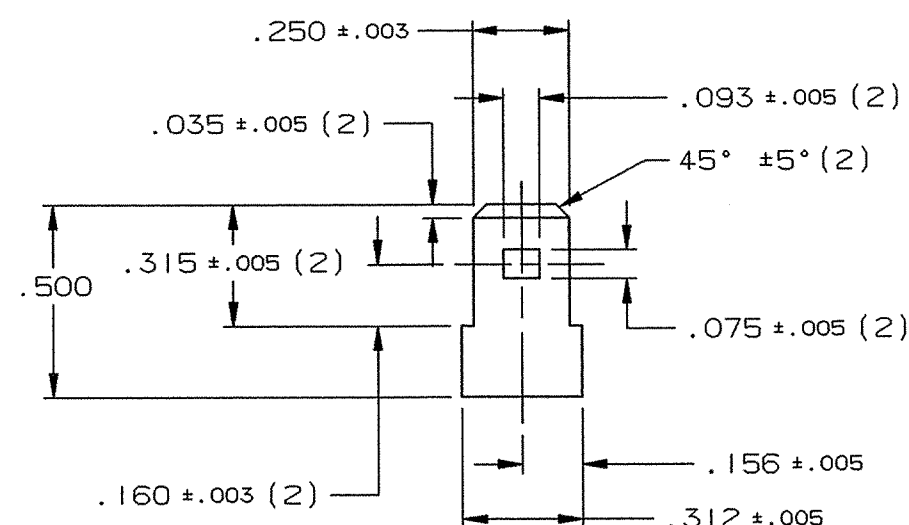

THIS MUST BE A PERFECT RADIUS  
.003/.005 DEEP BOTH SIDES  
(SEE NOTE 5)

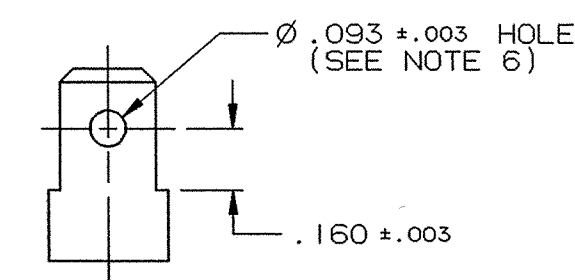

TAB #2

SAME AS TAB #1  
EXCEPT AS SHOWN  
NOTE: NOT PER CURRENT  
UL 310 STANDARD

| PART NUMBER    | MATERIAL                                                     | TYPE | TAB | FINISH                   | "J" DIA.  |
|----------------|--------------------------------------------------------------|------|-----|--------------------------|-----------|
| 3000M 362      | .032 ±.001 THICK BRASS<br>C26000, 1/2 HARD<br>R30T 56.5 - 68 | 1    | 1   | NONE                     | .200/.206 |
| 3000M 362-1    |                                                              | 1    | 1   | SILVER PLATE<br>PCS 1006 | .200/.206 |
| 3000M 362-2    |                                                              | 1    | 1   | ZINC PLATE<br>PCS 1009   | .200/.206 |
| 3000M 362B     |                                                              | 2    | 1   | NONE                     | .200/.206 |
| 3000M 362B-1   |                                                              | 3    | 1   | NONE                     | .200/.206 |
| 3000M 362B-2   |                                                              | 3    | 1   | NICKEL PLATE<br>PCS 1000 | .200/.206 |
| 3000M 362B-3   |                                                              | 2    | 1   | ELECTRO-TIN<br>PCS 1002  | .200/.206 |
| 3000M 362F     |                                                              | 7    | 1   | NONE                     | .200/.206 |
| 3000M 362F-1   |                                                              | 7    | 1   | ELECTRO-TIN<br>PCS 1002  | .200/.206 |
| 3000M 362J     |                                                              | 1    | 1   | NICKEL PLATE<br>PCS 1000 | .200/.206 |
| 3000M 362Q     |                                                              | 1    | 1   | NONE                     | .134/.138 |
| 3000M 362R     |                                                              | 4    | 1   | NONE                     | .200/.206 |
| 3000M 362R-1   |                                                              | 4    | 1   | ELECTRO-TIN<br>PCS 1002  | .200/.206 |
| 3000M 362R-2   |                                                              | 4    | 2   | ELECTRO-TIN<br>PCS 1002  | .200/.206 |
| 3000M 362R-2-1 |                                                              | 4    | 2   | NONE                     | .200/.206 |
| 3000M 362R-3   |                                                              | 4    | 1   | NONE                     | .224/.218 |
| 3000M 362S     |                                                              | 1    | 1   | ELECTRO-TIN<br>PCS 1002  | .200/.206 |
| 3000M 362Y     |                                                              | 5    | 1   | ELECTRO-TIN<br>PCS 1002  | .134/.138 |
| 3000M 362Z     |                                                              | 6    | 1   | NONE                     | .200/.206 |
| 3000M 362Z-1   |                                                              | 6    | 1   | ELECTRO-TIN<br>PCS 1002  | .200/.206 |

- NOTES:
1. MUST ACCEPT A .250 X .032 FEMALE RECEPTACLE.
  2. MALE TAB CONFORMS TO UL 310.
  3. ARK-LES TO BE DIE STAMPED.
  4. ALL PORTIONS OF THE TAB SHOWN SHALL BE FLAT AND FREE FROM BURRS OR RAISED PLATEAUS, EXCEPT THAT THERE MAY BE IN AN AREA .050 INCH SURROUNDING THE DETENT OR HOLE, A RAISED PLATEAU OVER THE STOCK THICKNESS OF .001 INCH PER SIDE.
  5. DETENT SHALL BE LOCATED WITHIN .005 OF THE CENTERLINE OF THE TAB.
  6. HOLE SHALL BE LOCATED WITHIN .003 OF THE CENTERLINE OF THE TAB.

ARK-LES  
UNCONTROLLED

|                                    |             |        |     |                                          |
|------------------------------------|-------------|--------|-----|------------------------------------------|
| PROD. REL.                         | ECR 4830    | 4/5/84 | RT  | TOLERANCES UNLESS OTHERWISE SPECIFIED:   |
| QUOTE REL.                         |             |        |     | DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1° |
| DR: R. TASTULA                     | 7/18/97     |        |     | MATERIAL: SEE TABLE                      |
| CHK'D: R.W.T.                      | 6-28-02     |        |     | FINISH: SEE TABLE                        |
| APP: R.T.B.                        | 6-28-01     |        |     | PART NO: 3000M 362/                      |
| N REVISED & REDRAWN PER ECR #11336 | 7/18/97     | RT     |     |                                          |
| REV.                               | DESCRIPTION | DATE   | DR. | SCALE: 2:1 CAD NO: CTP0003               |

ORIGINAL IF RED