


DEPT	1
1	1
2	
3	
4	3
5	
6	
7	
8	
9	
10	
11	
12	8
NC	2
JZ	3


PART NAME: MALE TERMINAL - 8 WAY

PART NO: 3000C70-3/

PART NUMBER	TYPE	"D" DIA HOLE	FINISH
3000C70-3	1	.132/.128	NONE
3000C70-3D	1	.132/.128	TIN PLATE PCS1002
3000C70-3D1	1	.148/.132	TIN PLATE PCS1002
3000C70-3E	1	.132/.128	SILVER PLATE PCS1006
3000C70-3F	4	.132/.128	NONE
3000C70-3J	2	.132/.128	NONE
3000C70-3M	1	.132/.128	ZINC PLATE PCS1009
3000C70-3N	3	.132/.128	NONE


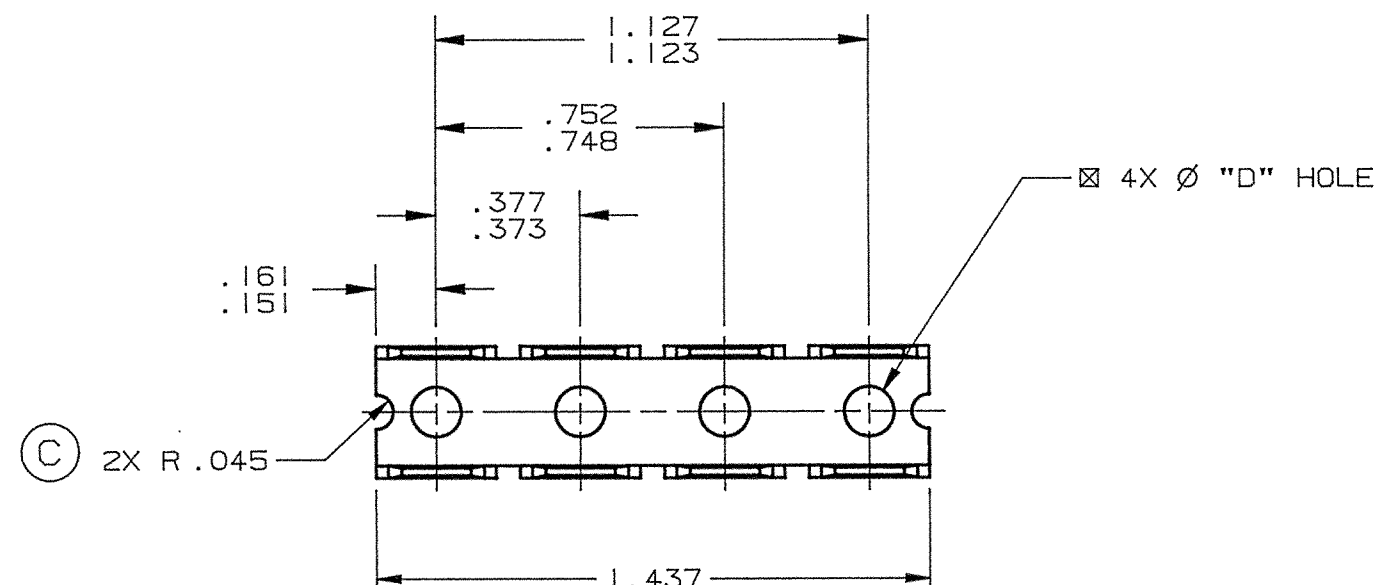


SECTION A-A

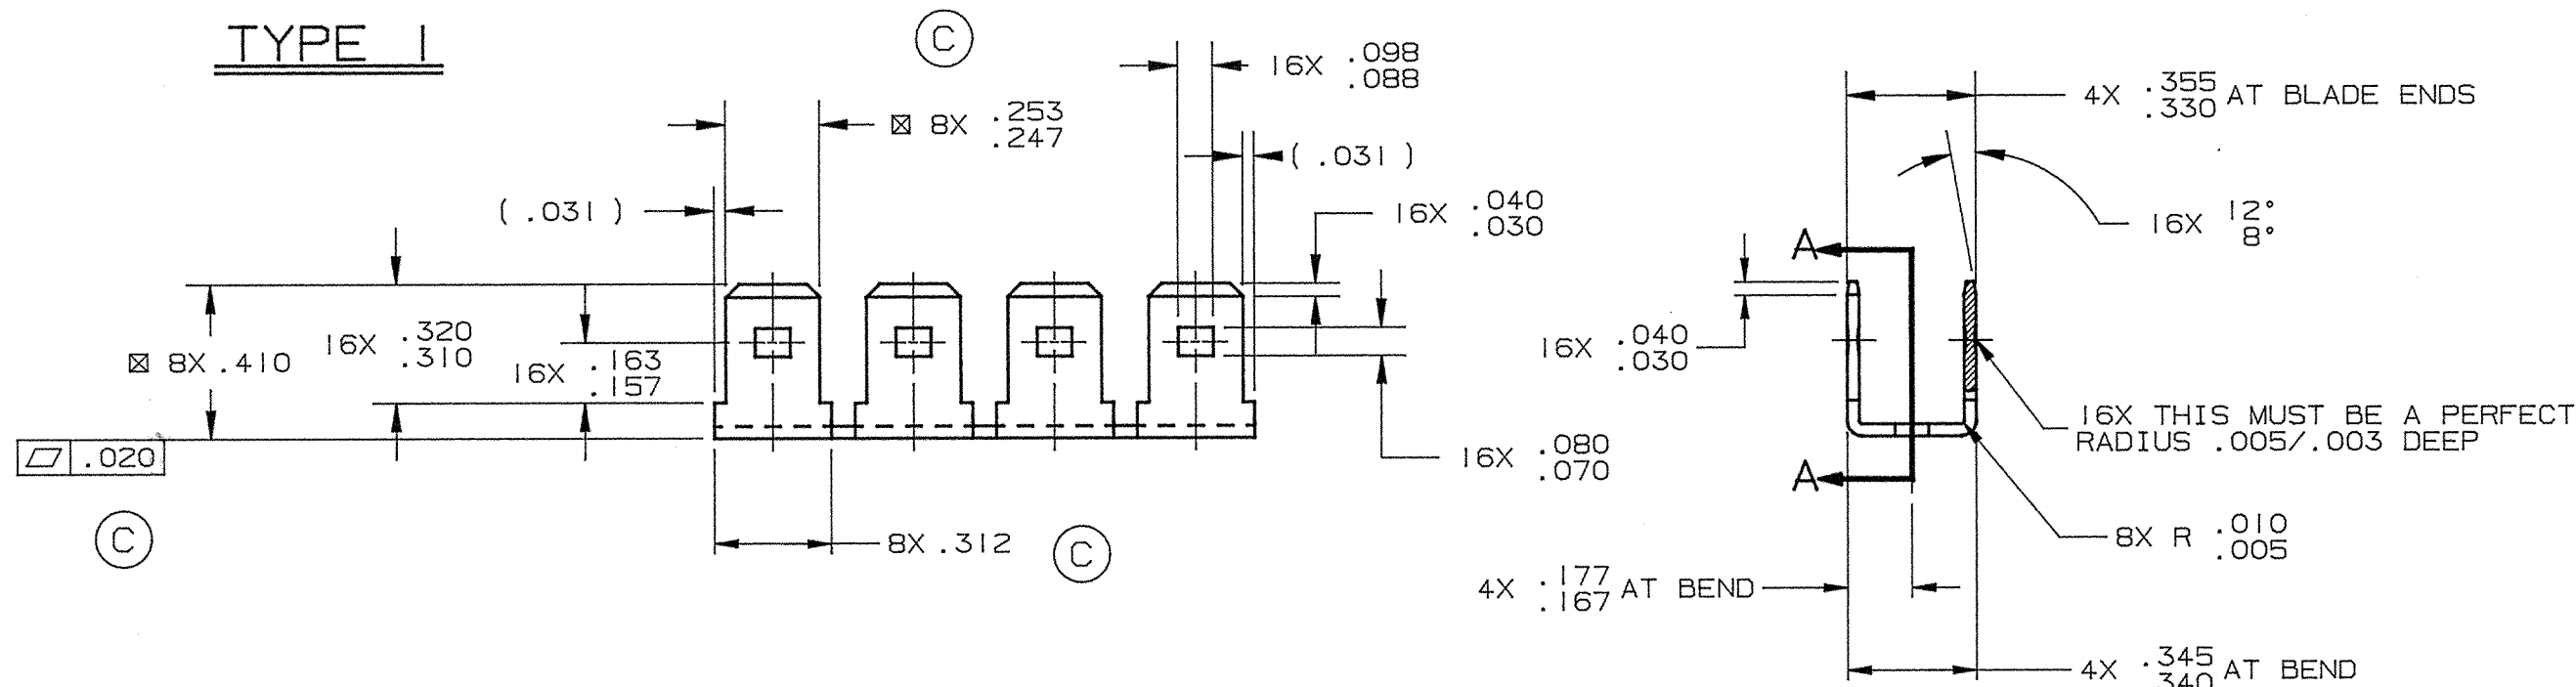



TYPE 2

SAME AS TYPE 1 EXCEPT AS SHOWN

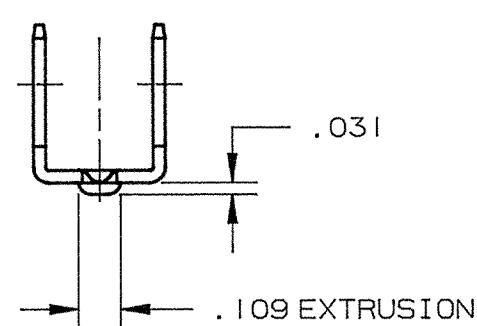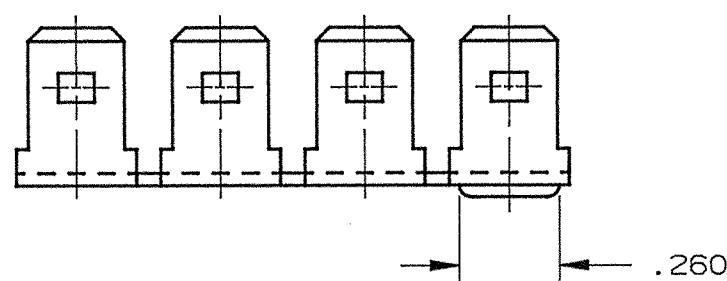



TYPE 3

SAME AS TYPE 1 EXCEPT AS SHOWN

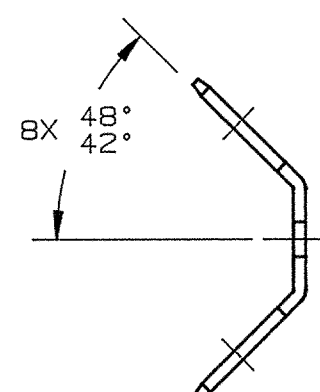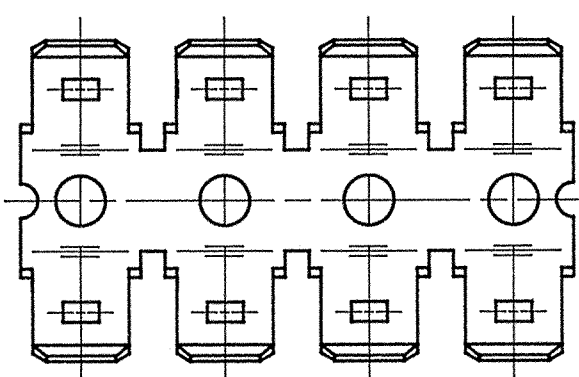

TYPE 4

SAME AS TYPE 1 EXCEPT PRODUCED ON A CONTINUOUS STRIP

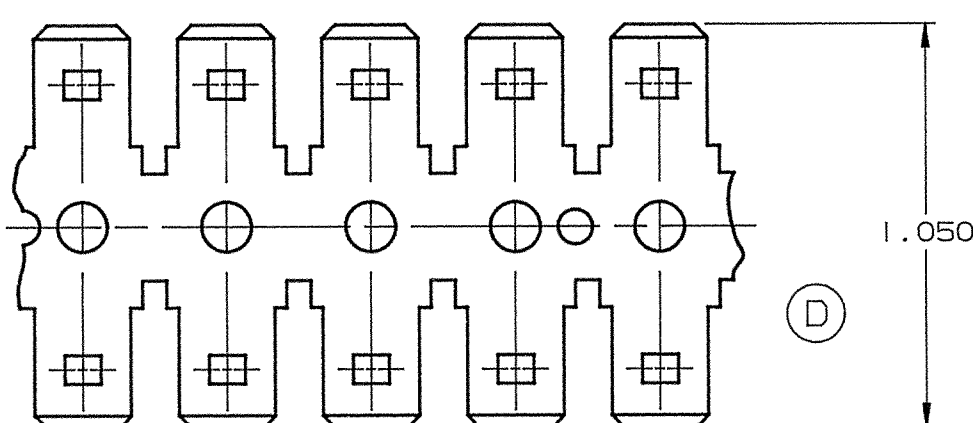

- NOTES:
- TO ACCOMMODATE A .250 X .032 FEMALE QUICK-CONNECT.
 - ALL PORTIONS OF THE TAB SHOWN SHALL BE FLAT AND FREE OF BURRS OR RAISED PLATEAUS, EXCEPT THAT THERE MAY BE, IN AN AREA .050 INCH SURROUNDING THE DETENT, A RAISED PLATEAU OVER THE STOCK THICKNESS OF .001 INCH PER SIDE.
 - DETENT SHALL BE LOCATED WITHIN .003 INCH OF THE CENTERLINE OF THE TAB.
 - MALE TAB CONFORMS TO UL 310.
 - ALL CORNERS SHOWN SHARP MAY HAVE A .010 MAXIMUM RADIUS.
 - Ø = PRE-CONTROL DIMENSION.

ARK-LES
UNCONTROLLED

REV.	DESCRIPTION	DATE	DR.	SCALE: 2:1	CAD NO: CTM0004	PROD. REL. ECR 8902 1/30/92 RT	TOLERANCES UNLESS OTHERWISE SPECIFIED:
D	REVISED PER ECR #11443	1/14/98	RT			CHK'D: R.W.T. 1-20-98	DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°
C	REVISED & REDRAWN PER ECR #11411	12/5/97	RT			APP: COR 1-20-98	MATERIAL: .032 ±.001 THICK BRASS C26000, 1/2 HARD TENSILE: 57,000 - 67,000 PSI
							FINISH: SEE TABLE
							PART NO: 3000C70-3/

ORIGINAL IF RED