
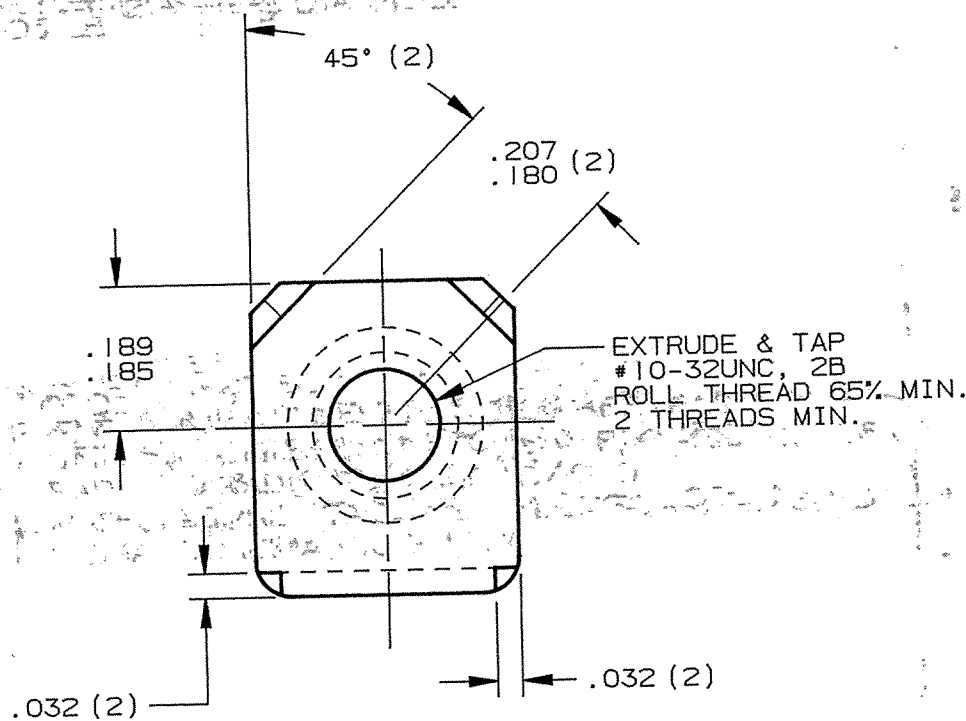
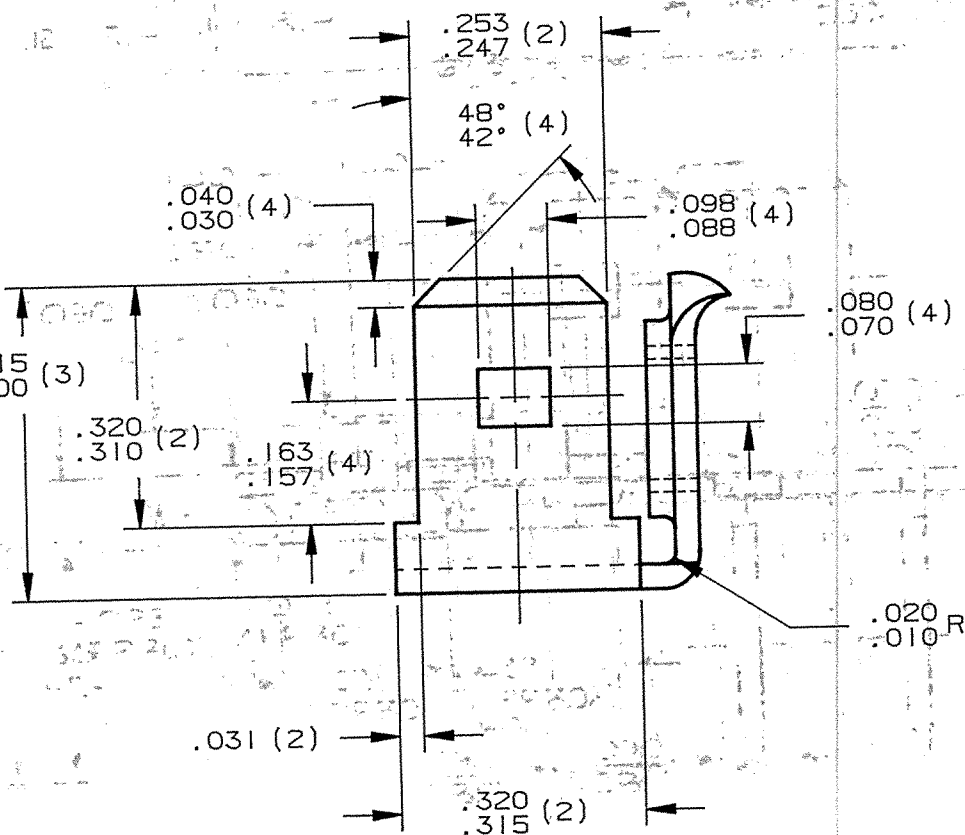
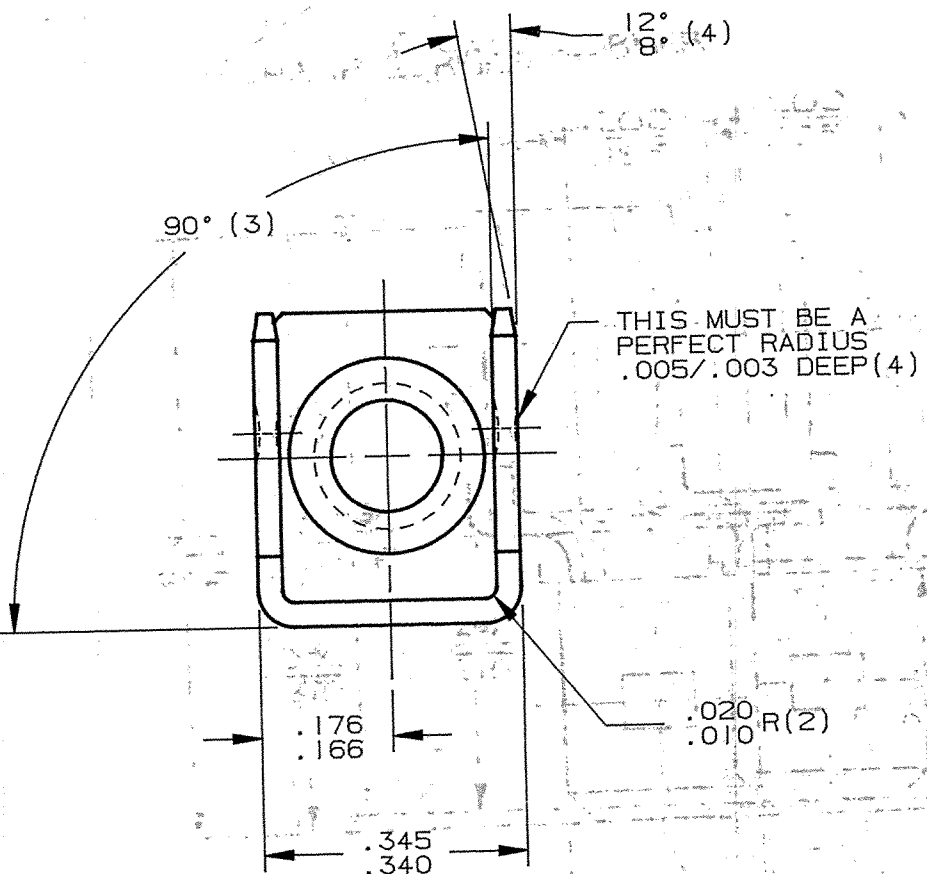


|      |   |
|------|---|
| DEPT |   |
| 1    |   |
| 2    |   |
| 3    |   |
| 4    | 3 |
| 5    |   |
| 6    |   |
| 7    |   |
| 8    |   |
| 9    |   |
| 10   |   |
| 11   |   |
| 12   | 7 |
| NC   |   |
| JZ   |   |
| DV   |   |

PART NAME: 2 WAY MALE SCREW TERMINAL

|                       |                               |                                          |
|-----------------------|-------------------------------|------------------------------------------|
| PART NO: 3000M541C-2/ |                               |                                          |
| PART NO.              | FINISH                        | COMMENTS                                 |
| 3000M541C-2           | NONE                          |                                          |
| 3000M541C-2LT         | NONE                          | LESS TAPPING                             |
| 3000M541C-2-1         | ELECTRO-TIN PLATE<br>PCS 1002 |                                          |
| 3000M541C-2-1LT       | ELECTRO-TIN PLATE<br>PCS 1002 | MAKE FROM<br>3000M541C-2LT<br>BY PLATING |

- NOTES
- ALL PORTIONS OF TAB SHOWN SHALL BE FLAT AND FREE OF BURRS OR RAISED PLATEAUS, EXCEPT THAT THERE MAY BE, IN AN AREA .050 SURROUNDING THE DETENT, A RAISED PLATEAU OVER THE STOCK THICKNESS OF .001 PER SIDE.
  - DETENT SHALL BE LOCATED WITHIN .005 OF THE TAB CENTERLINE.
  - MALE TAB MUST CONFORM TO NEMA DC2-19XX.
  - TO ACCEPT .250 X .032 FEMALE RECEPTACLE.

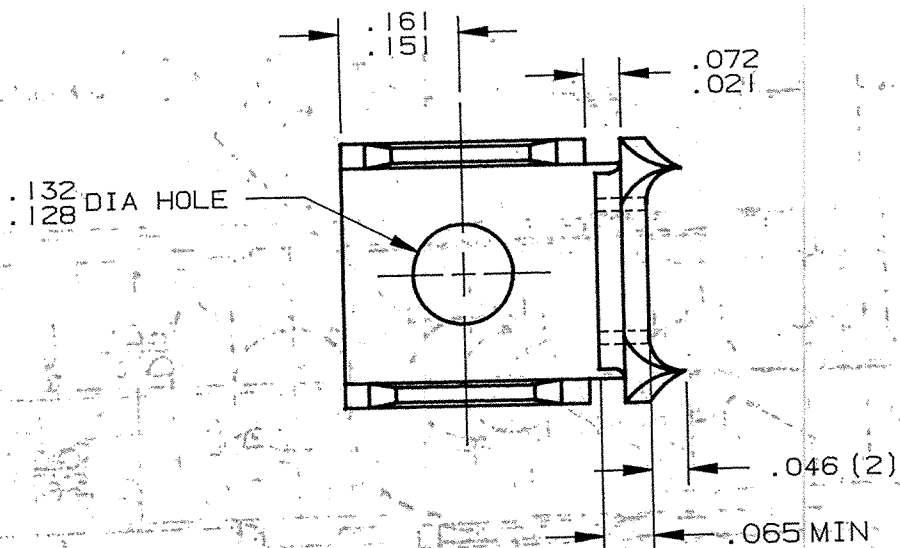

ARK-LES UNCONTROLLED

|      |                                  |         |     |                                 |                 |         |    |                                                                      |                |            |
|------|----------------------------------|---------|-----|---------------------------------|-----------------|---------|----|----------------------------------------------------------------------|----------------|------------|
|      |                                  |         |     | PROD. REL.                      | 82330           | 2/8/72  | JB | TOLERANCES UNLESS OTHERWISE SPECIFIED:                               |                |            |
|      |                                  |         |     | QUOTE REL.                      |                 |         |    | DECIMALS ±.010                                                       | METRIC ±0.25mm | ANGLES ±1° |
|      |                                  |         |     | DR:                             | B. J. CARUTHERS | 9/23/94 |    | MATERIAL: .032±.001 THK BRASS.<br>C26000, 1/2 HARD<br>R30T 56.5-68.0 |                |            |
|      |                                  |         |     | CHK'D:                          | R.W.T.          | 4-11-95 |    | FINISH: SEE TABLE                                                    |                |            |
| F    | REVISED PER ECR #10488           | 4/10/95 | RT  | APP:                            | COL             | 4-13-95 |    | PART NO: 3000M541C-2/                                                |                |            |
| E    | REVISED & REDRAWN PER ECR #10277 | 9/23/94 | BJC | SUPERCEDES DWG. DATED: 12/19/73 |                 |         |    |                                                                      |                |            |
| REV. | DESCRIPTION                      | DATE    | DR. | SCALE: 4:1                      | CAD NO: BTP0027 |         |    |                                                                      |                |            |

ORIGINAL