

Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdj@ssdj-power.com * www.ssdj-power.com

SDAD102 F Series

**2,500 to 15,000 VOLTS
FAST RECOVERY
STACKABLE HIGH VOLTAGE RECTIFIER**

Designer's Data Sheet

Part Number/Ordering Information ^{1/}

SDAD10 2

Screening ^{2/}

_ = Not Screened
 TX = TX Level
 TXV = TXV Level
 S = S Level

Reverse Recovery Time

F = Fast Recovery Time

Voltage 2.5 = 2.5kV, 5 = 5kV,
7.5 = 7.5kV, 10 = 10kV, and 15 = 15kV

Power Rating (See Below)

Package Size = 2 Inches Diameter

FEATURES:

- Stackable to 600 kV+
- PIV 2.5 kV to 15 kV
- High Current Ratings
- Fast Reverse Recovery Time
- Only Hermetically Sealed Rectifiers Used
- Controlled Avalanche Rated
- Modular Design for Easy Stacking
- Storage and Operating Temps -65°C to +150°C
- Available in Standard, Ultra Fast and Hyper Fast Versions
- Replacement Upgrade- Microsemi / Unitrode types UDF-2.5 through UDC-15
- TX, TXV, and S-Level Screening Available ^{2/}


ELECTRICAL CHARACTERISTICS ^{3/}

Part Number	Peak Inverse Voltage	Maximum Reverse Recovery Time <u>5</u> /	Average DC Output Current <u>4</u> / T _C = Case Temperature			Surge Non-repetitive	Maximum Forward Voltage Drop		Maximum Leakage Current @ PIV	Replacement Part Number
	PIV (kV)	t _{RR} (ns)	I _F (avg) (A)			I _{FSM} (A)	V _F (V)	I _F (A)	I _R (μA)	
	25°C	25°C	75°C	50°C	60°C	100°C	25°C		25°C	
SDAD102 F 2.5 F	2.5	500	4.50	5.30	5.00	150	6.0	2.2	10	UDF-2.5
SDAD102 D 2.5 F	2.5	500	2.25	3.30	2.80	80	6.0	1.2	5	UDD-2.5
SDAD102 F 5.0 F	5.0	500	3.30	4.40	4.00	150	11	1.6	10	UDF-5
SDAD102 D 5.0 F	5.0	500	1.50	2.00	1.85	80	11	0.75	5	UDD-5
SDAD102 C 5.0 F	5.0	500	1.20	1.70	1.50	25	10	0.70	2	UDC-5
SDAD102 D 7.5 F	7.5	500	1.00	1.50	1.25	80	17	0.50	5	UDD-7.5
SDAD102 C 7.5 F	7.5	500	0.90	1.25	1.10	25	15	0.50	2	UDC-7.5
SDAD102 C 10 F	10	500	0.75	1.00	0.90	25	20	0.37	2	UDC-10
SDAD102 C 15 F	15	500	0.50	0.70	0.60	25	30	0.25	2	UDC-15
High Current Versions										
SDAD102 H 2.5 F	2.5	500	9.00	10.6	10.0	150	4.05	7.0	20	---
SDAD102 H 5.0 F	5.0	500	6.60	8.80	8.00	150	7.20	5.0	20	---
SDAD102 H 7.5 F	7.5	500	2.00	3.00	2.50	80	9.6	1.7	10	---
SDAD102 H 10 F	10	500	1.50	2.00	1.80	50	12.0	1.3	10	---
SDAD102 H 15 F	15	500	1.00	1.40	1.20	50	17.2	0.8	10	---

NOTES:

- 1/** For Ordering Information, Price, Curves, and Availability- Contact Factory.
- 2/** Screening based on MIL-PRF-19500. Screening flows available on request
- 3/** Unless Otherwise Specified, All Electrical Characteristics @ 25°C.
- 4/** $T_C = 50^\circ\text{C}$ typical operation in oil.
 $T_C = 75^\circ\text{C}$ is typical ambient $T_A = 25^\circ\text{C}$ unheatsunk.
 $T_C = 60^\circ\text{C}$ typical operation with extender plates in air.
- 5/** Recovery Conditions: $I_F = 0.5$ Amp, $I_R = 1.0$ Amp rec. to .25 Amp.

SDAD102 Package:

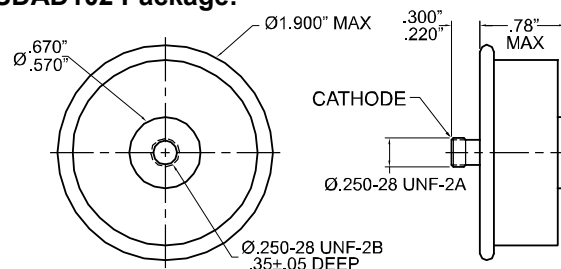

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RA0086C

DOC