



Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638
 Phone: (562) 404-4474 * Fax: (562) 404-1773
 ssdi@ssdi-power.com * www.ssdi-power.com

SPA513 Series

**1 AMP, 15,000 to 20,000 VOLTS
 HIGH VOLTAGE
 RECTIFIER BRIDGE**

Designer's Data Sheet

Part Number/Ordering Information ^{1/}
SPA513- **---** **---** **---**

└─ **Finish**
 ___ = Standard Case
 SAB = Sand Blasted Case

└─ **Screening ^{2/}**
 ___ = Not Screened
 TX = TX Level
 TXV = TXV Level
 S = Space Level

└─ **Dash Number ^{3/}**

- FEATURES:**
- Aerospace High Voltage Power Supply Applications
 - Multiple High Voltage Transformer Rectification
 - High Voltage Multiplier Design Using External Capacitors
 - Low Mechanical Stress Design
 - Excellent Thermal Resistance : 2.5°C/W
 - TX, TXV, and Space Level Screening Available
- Consult Factory For:
- Higher Blocking Voltages
 - Faster Switching Times
 - Other Electrical Configurations
 - Available with a sandblasted case to promote adhesion add "SAB" suffix

MAXIMUM RATINGS

CHARACTERISTIC	SYMBOL	VALUE	UNIT	
Peak Repetitive Reverse and DC Blocking Voltage ^{3/} (Module)	SPA513-02	15	kV	
	SPA513-03	17.5		
	SPA513-04	20		
	SPA513-05	20		
	SPA513-06 (BR1)	12.5		
	SPA513-06 (BR2)	10		
Peak Repetitive Reverse and DC Blocking Voltage (Each Bridge)	$T_C = 55^\circ\text{C}$	V_R	3.3	kV
Average Rectified Forward Current (Non-Repetitive, t = 8.3 msec Pulse)		I_O	1	A
Peak Surge Current (Non-Repetitive, t = 8.3 msec Pulse, $T_A = 25^\circ\text{C}$)		I_{FSM}	25	A
Storage & Operating Temperature Range		$T_{OP} \ \& \ T_{STG}$	-65 to +150	°C
Thermal Resistance, Junction to Base		$R_{\theta JB}$	2.5	°C/W

ELECTRICAL CHARACTERISTICS, Each Bridge Leg, @ $T_A = 25^\circ\text{C}$ (Unless Otherwise Specified)

PARAMETER	SYMBOL	MIN	MAX	UNIT
Instantaneous Forward Voltage Drop ($I_F = 1.0 \text{ A}$, 300 μsec Pulse Minimum)	V_{F1}	–	7.5	V
Reverse Leakage ($V_R = 2.5 \text{ kV}$, 300 μsec Pulse Minimum)	$T_A = 25^\circ\text{C}$ I_{R1}	–	1.0	μA
	$T_A = 100^\circ\text{C}$ I_{R2}	–	50	
Insulation Resistance SPA513-02, -03, -04: All Terminals to Base @ 15 kV SPA513-05, -06: All Terminals to Base @ 20 kV	R_{INSUL}	10	–	$\text{G}\Omega$
Reverse Recovery Time ($I_F = 0.5 \text{ A}$, $I_R = 1.0 \text{ A}$, $I_{RR} = 0.25 \text{ A}$)	t_{rr}	–	60	nsec

- Notes:** ^{1/} For ordering information, price, and availability- Contact factory.
^{2/} Screened based on MIL-PRF-19500. Screening flows available on request.
^{3/} For each dash number, refer to $V_{R(MODULE)}$ rating, schematic, and outline.




Solid State Devices, Inc.


14701 Firestone Blvd * La Mirada, Ca 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

SPA513 Series


SPA513-02

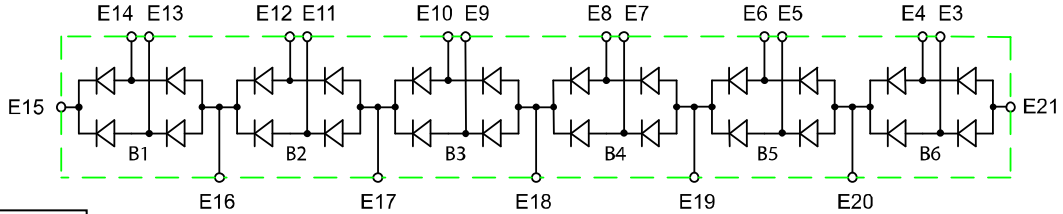


Tolerances
(Unless Specified):
.XX ± .03
.XXX ± .010

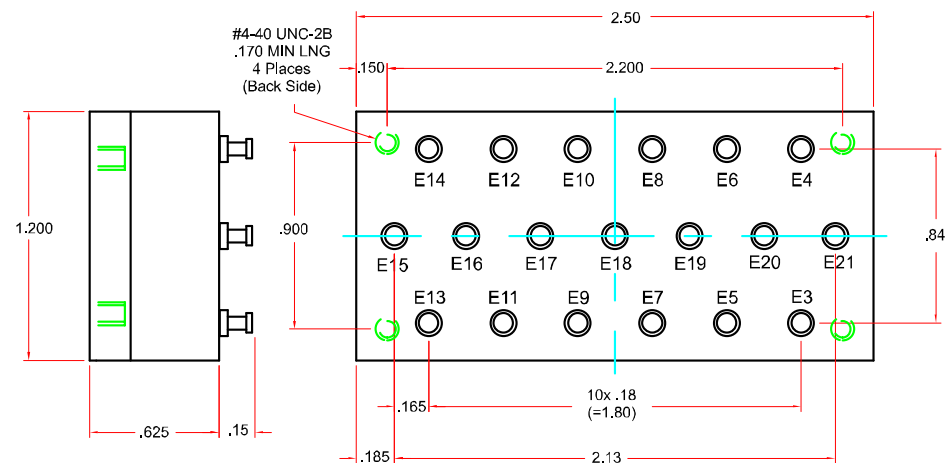

SPA513-03

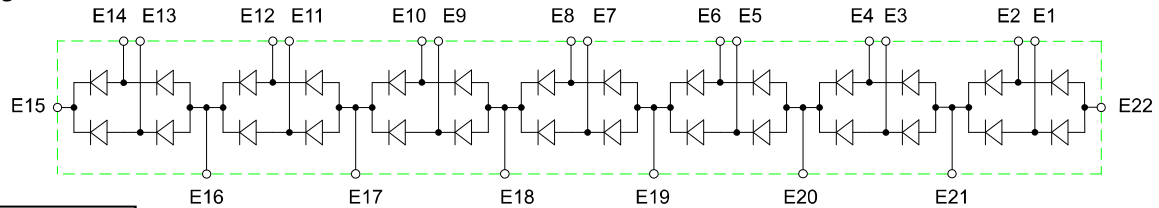

Tolerances
(Unless Specified):
.XX ± .03
.XXX ± .010

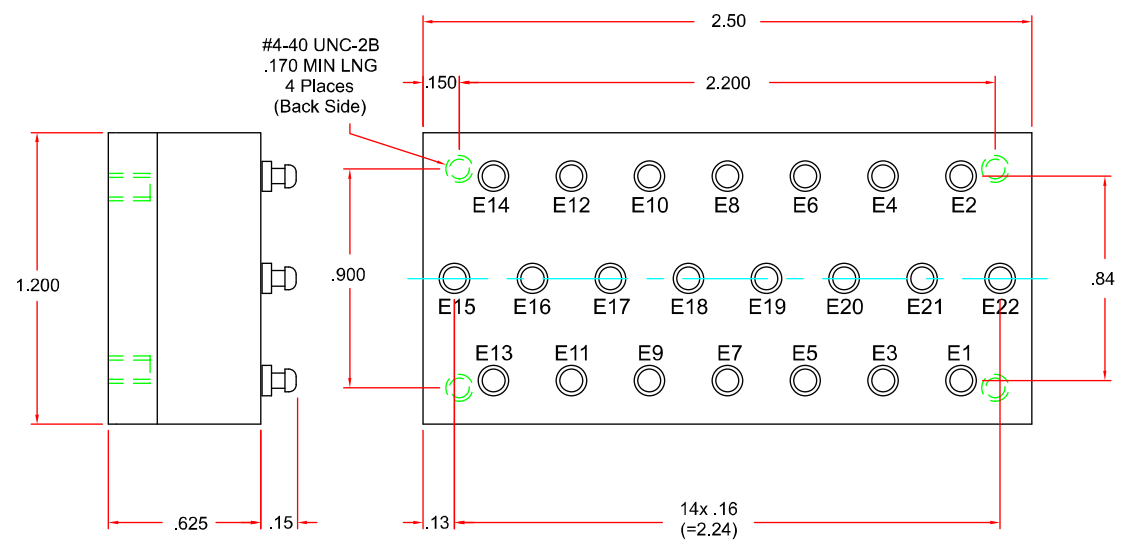

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: PM0012H

DOC




Solid State Devices, Inc.



14701 Firestone Blvd * La Mirada, Ca 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

SPA513 Series

SPA513-04

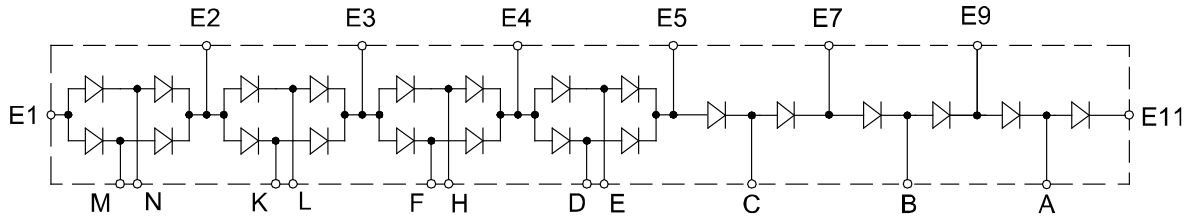


ASPM

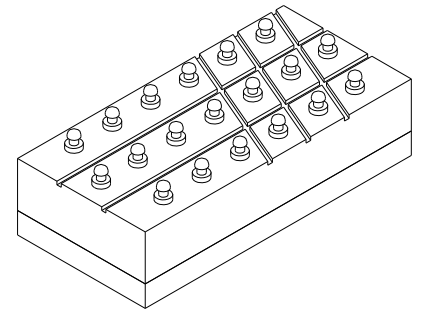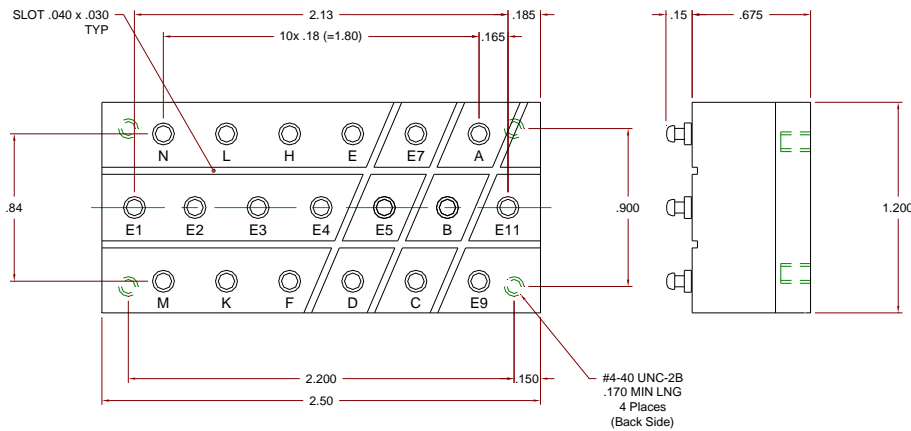


Tolerances
(Unless Specified):
.XX ± .03
.XXX ± .010

SPA513-05

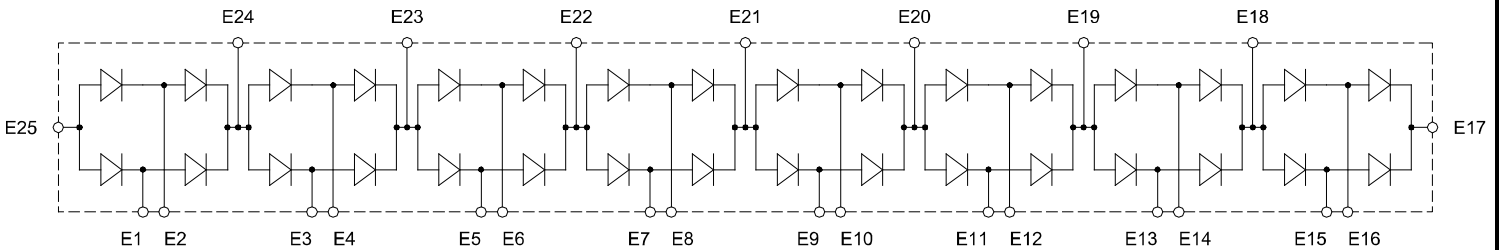

Tolerances
(Unless Specified):
.XX ± .03
.XXX ± .010

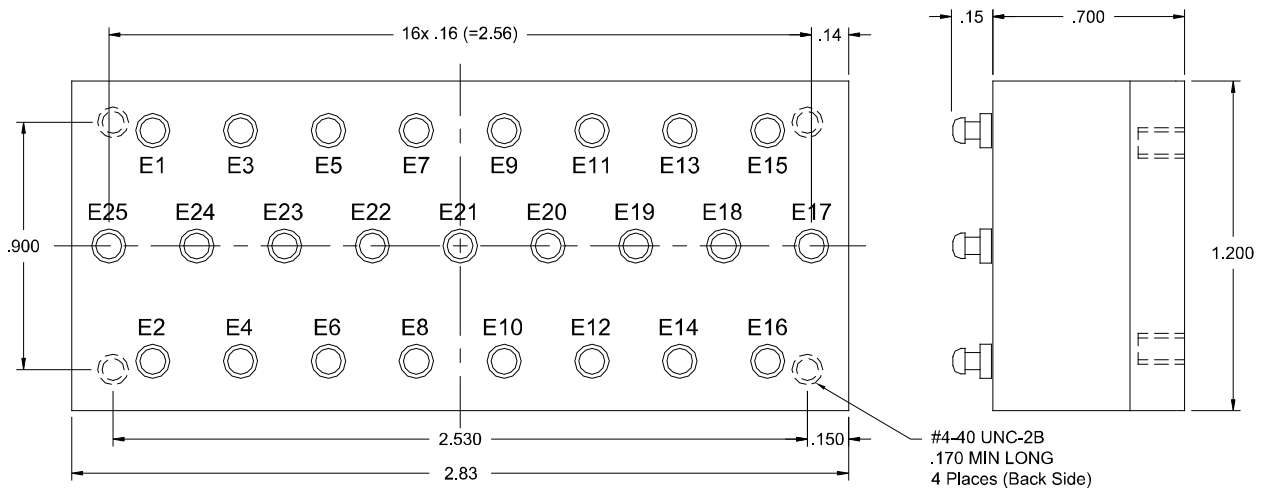

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: PM0012H

DOC





Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

SPA513 Series

SPA513-06

Tolerances
(Unless Specified):
.XX ± .03
.XXX ± .010

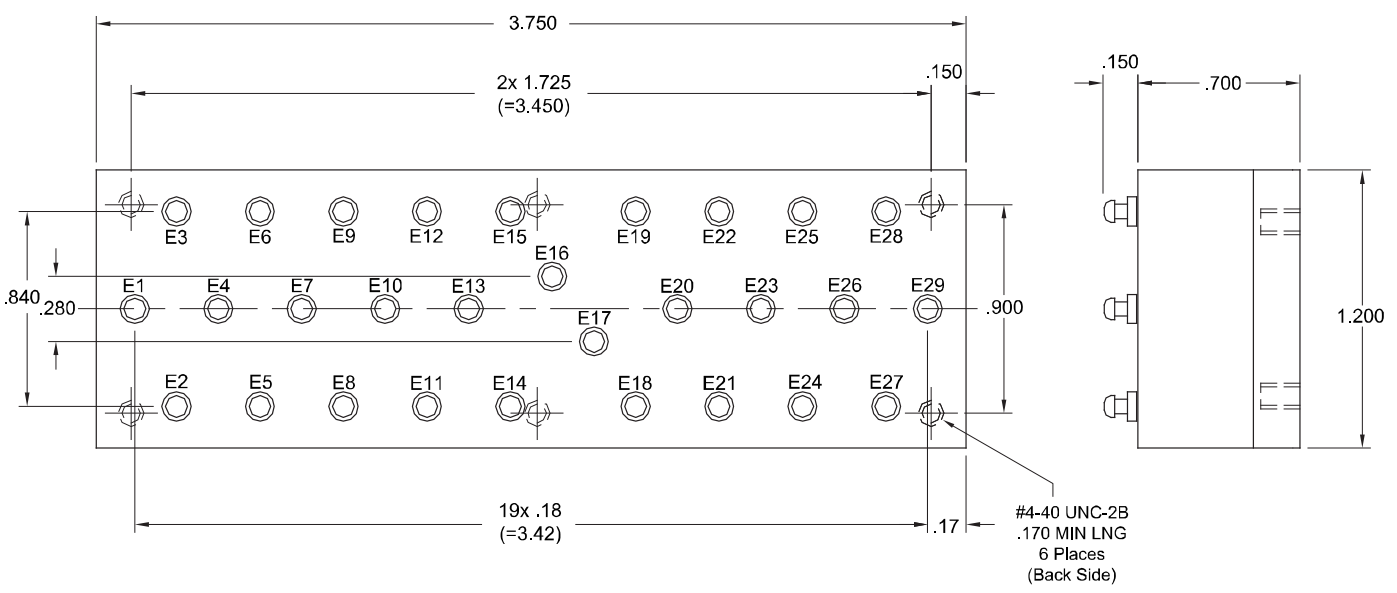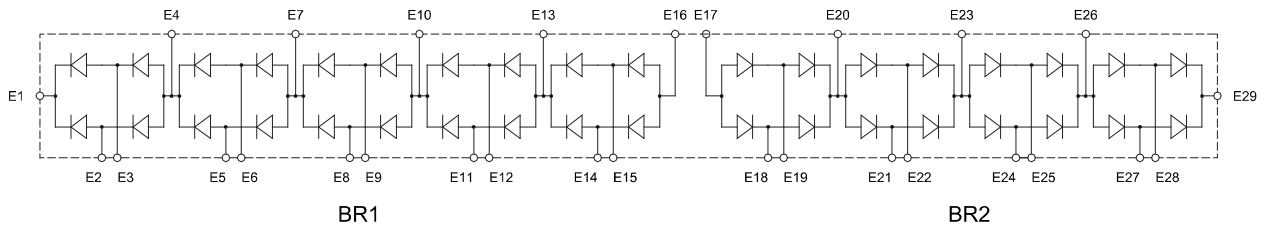

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: PM0012H

DOC