

## Wide Band RF Amplifier

- \* Operating Frequency : 2300-2600 MHz
- \* Saturated Power : 10 W Psat Typical
- \* Gain : 20 dB



**Description:** Ultra wideband operation, Fiber Drivers, Test Instrumentation, All Purpose Power Amp

### ELECTRICAL SPECIFICATION @ VDD= +28 VDC, -5VDC; Temp. = 25 °C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	2500		2600	MHz
Gain	G	18	20		dB
Gain Flatness	Δ G		±0.5	±0.7	dB
Power Added Efficiency	PAE		30		%
Power Output	Psat	39	40		dBm
Return Loss in/out	S11/S22	2.2:1	1.8:1		dB
Operating Voltage	Vdc		12		Volt
Operating Current	Idq		2500		mA

### MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimension	2x1x0.50		inches
RF Connectors IN/OUT	SMA-F		
DC Connector	Filtered DC		

### PROTECTIONS

	Max	
RF Input Power	24	dBm
Reverse Polarity Protection		
Load VSWR	5:01	RATIO
Stability	Unconditional	


### ENVIROMENTAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max	Units
Operating Case Temperature	Tc	0		75	°C
Storage Temperature	Tstg	-55		150°C	°C

3009 Old State Rd Telford Pa 18969

Web: [www.amplifiersolutions.com](http://www.amplifiersolutions.com)  
 Email: [sales@amplifiersolutions.com](mailto:sales@amplifiersolutions.com)

Tel: 215-997-7856  
 Fax: 215-997-7857

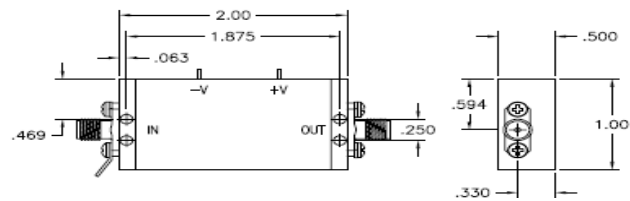

3009 Old State Rd Telford Pa 18969

Web: [www.amplifiersolutions.com](http://www.amplifiersolutions.com)  
Email: [sales@amplifiersolutions.com](mailto:sales@amplifiersolutions.com)

Tel: 215-997-7856  
Fax: 215-997-7857