

ASC804C


Features: (typical values)

- Wide Band 1000-3000 MHz.
- Noise Figure 3.0 dB.
- High Gain 52 dB.

Maximum Ratings

Storage Temperature -62°C to +125°C
 DC Voltage +17 volts
 RF Input Power +7.0 dBm.
 Case Temperature +100°C

1000-3000 MHz Cascadable Amplifier

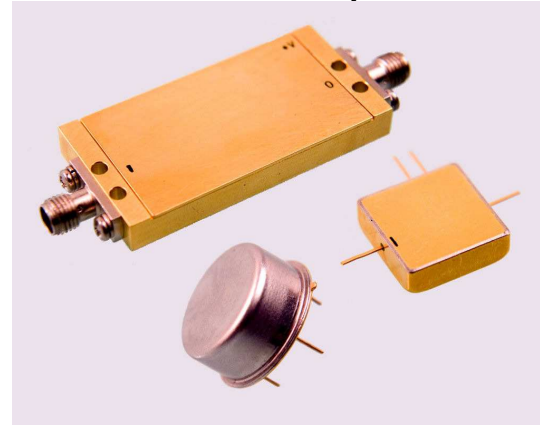

Specifications (Referenced to 50 ohms)

Parameter	Typical Conditions	Min Value	Max Value	Units
Frequency		1000	3000	MHz.
Gain	52	50		dB.
Gain Flatness	±0.5		±1.5	dB.
Gain Var. over temp	0.6			ΔdB.
Pout @ 1dB Comp	+26	+24		dBm.
Noise Figure	3.0		4.5	dB.
Reverse Isolation	60			dB.
IP ₃ /IP ₂ (two-tone)*	38/44	35/40		dBm.
HIP2 (2 nd harm.)	45			dBm.
VSWR In/Out	1.7:1		2.0:1	
Supply Required	+15/1600		+15/1700	v/mA.

Min. and max. values are from -55°C to +85°C
 *IP₃ and IP₂ are in band output intercept points

