



**PRELIMINARY DATA**

**IGBT BASED  
DC SOLID-STATE RELAY**



- ▶ Latest high voltage IGBT technology generation.
- ▶ New innovative isolated driver ensuring fast power transistor turn on and off therefore low power transient.
- ▶ Ultra low output leakage current
- ▶ Low control current consumption
- ▶ Triggered control input to avoid linear control risks
- ▶ Low conducted and radiated disturbances

**SCI0251200**




Control voltage range	4.5-32VDC
Max transient peak voltage	1200v
Max. Load Current (with heatsink)	25ADC

DC Mains voltage range	Load current range	Control input voltage range	In & case / Out Insulation	Connections	Dimensions (WxHxD)	Weight
(Depends on protection clamping voltage)	0 to 25A (with heatsink)	4.5-32VDC	4kV	M3 round tabs M5 round tabs	44.5 x 58.2 x 27 (mm)	100g

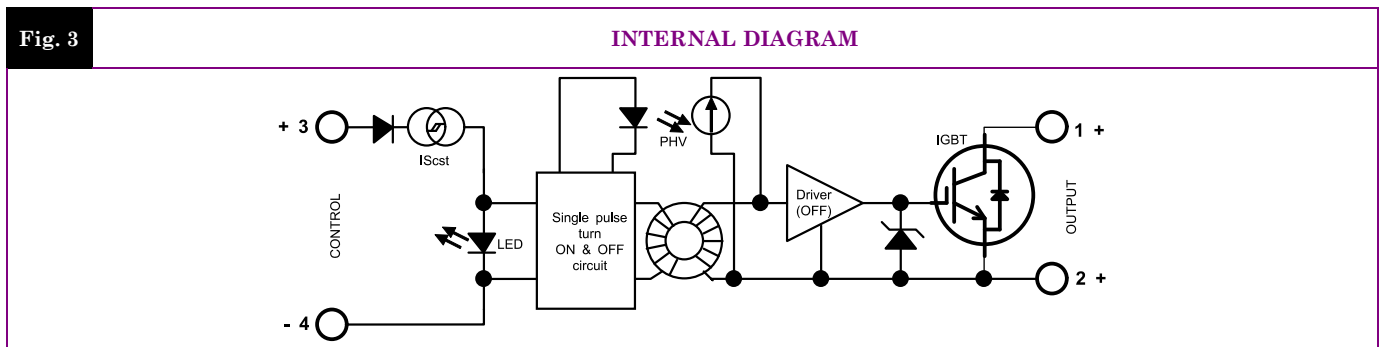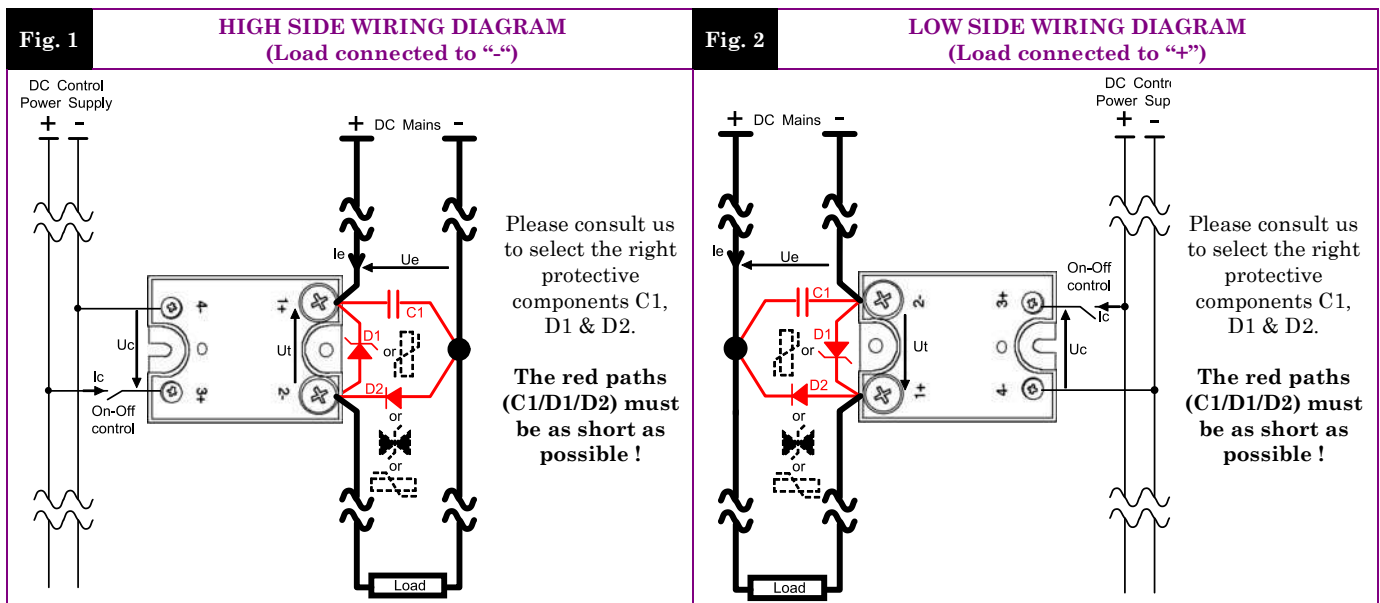


*Proud to serve you*

**CONTROL INPUT CHARACTERISTICS**

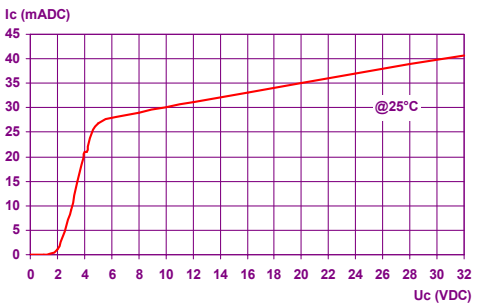INPUT CIRCUIT	CHARACTERISTIC	LABEL	VALUE	INFO.	<b>Fig. 4</b> <b>CONTROL CURRENT vs. CONTROL VOLTAGE</b> 
	Nom. Control voltage	<b>Ucnom</b>	12-24VDC		
	Nom. Control current	<b>Icnom</b>	35mADC		
	Control voltage range	<b>Uc</b>	4.5 – 32VDC	typical=4.3V	
	Control current consumption	<b>Ic</b>	25 – 42mADC	See curve	
	Releasing control voltage	<b>Uc<sub>offmax</sub></b>	1VDC	Typical= 3.5V	
	Max. reverse control voltage	<b>-Uc<sub>max</sub></b>	32VDC	-Ic <sub>max</sub> <100µA	
	Input impedance	<b>Rin</b>	Current limitation	See curve	

**TIME CHARACTERISTICS**

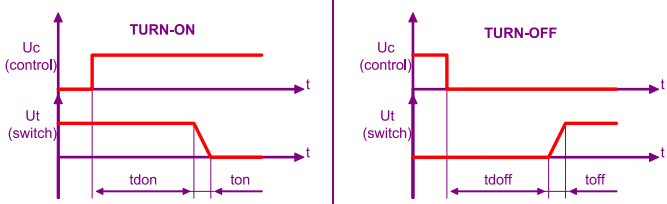TIME CHARACT.	CHARACTERISTIC	LABEL	VALUE		
	Turn on time	<b>ton</b>	10µs		
	Turn on delay	<b>tdon</b>	600µs		
	Turn off time	<b>toff</b>	50µs		
	Turn off delay	<b>tdoff</b>	100µs		
Max. On-Off frequency	<b>F<sub>(on-off)</sub></b>	200Hz			


**POWER OUTPUT CHARACTERISTICS**

POWER CIRCUIT	CHARACTERISTIC		LABEL	VALUE	INFO.
	Mains voltage range		<b>Ut</b>   <b>Ue</b>	Min = VCEsat	Depends on protection clamping voltage (D1)
	Non-repetitive peak voltage		<b>Utp</b>	1200V	
	Overvoltage protection		<b>D1</b>	Not integrated A voltage clamping mean must be connected across the terminals 1 & 2 (see fig 1 & 2)	Please consult us to select the right protective components
	Off-state max reverse voltage drop (internal diode)		<b>-Ut</b>	1.4V	@Ie=25A
	Maximum nominal currents		<b>Ie max</b>	25A	<b>See fig. 9</b>
	Max. non-repetitive peak current		<b>Iepeak</b>	160A	@Tc=100°C @Tj=175°C @Utp (See fig. 8)
	Min. load current		<b>Iemin</b>	0mA	
	Max. leakage current		<b>Ielk max</b>	1mA	@Utp @Tjmax
	Max. on-state voltage		<b>VCEsat</b>	1.45V @Tj=25°C   1.8V @Tj=125°C	@Iemax
	Typ. output capacitance		<b>Cout</b>	300pF	@Utp
	Junction/case thermal resistance		<b>Rthjc</b>	0.55K/W	
	Built-in heatsink thermal resistance vertically mounted		<b>Rthra</b>	10K/W	@ΔTra=75°C
	Heatsink thermal time constant		<b>Tthra</b>	10 minutes	@ΔTra=60°C
	Control inputs/power outputs insulation voltage		<b>Uimp</b>	4kV	
	Inputs/case insulation voltage		<b>Uimp</b>	4kV	
	Outputs/case insulation voltage		<b>Uimp</b>	4kV	
	Isolation resistance		<b>Rio</b>	1GΩ	
	Isolation capacitance		<b>Cio</b>	<8pF	
	Maximum junction temperature		<b>Tjmax</b>	175°C	
	Storage ambient temperature		<b>Tstg</b>	-40->+100°C	
	Operating ambient temperature		<b>Tamb</b>	-40->+90°C	<b>See fig. 9</b>
	Max. case temperature		<b>Tc</b>	100°C	




**OUTPUT SWITCH CHARACTERISTIC CURVES**


**Fig. 5 VOLTAGE DROP VS LOAD CURRENT**

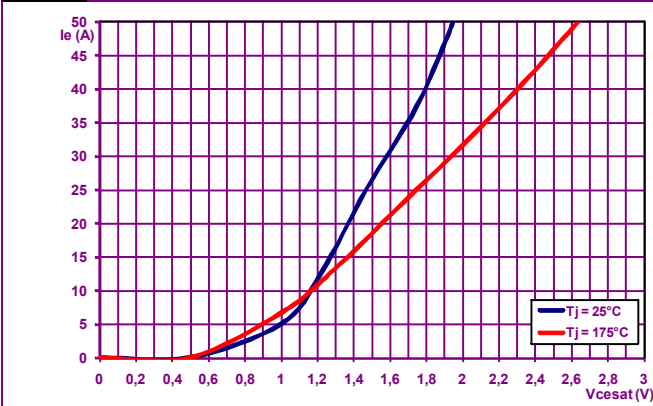


**Fig. 6 REVERSE VOLTAGE DROP VS REVERSE CURRENT**

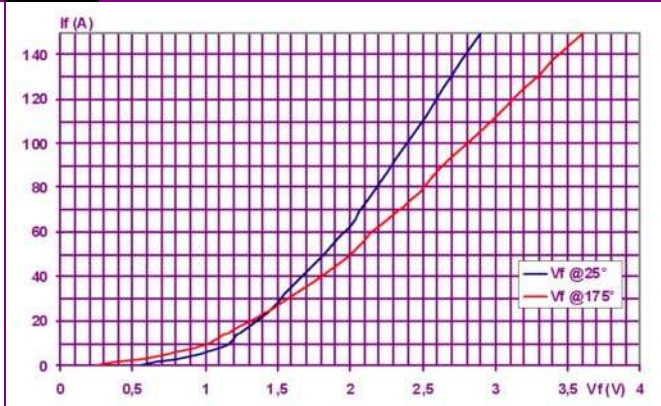


**Fig. 7 POWER ELEMENT TRANSIENT THERMAL IMPEDANCE vs. PULSE DURATION**

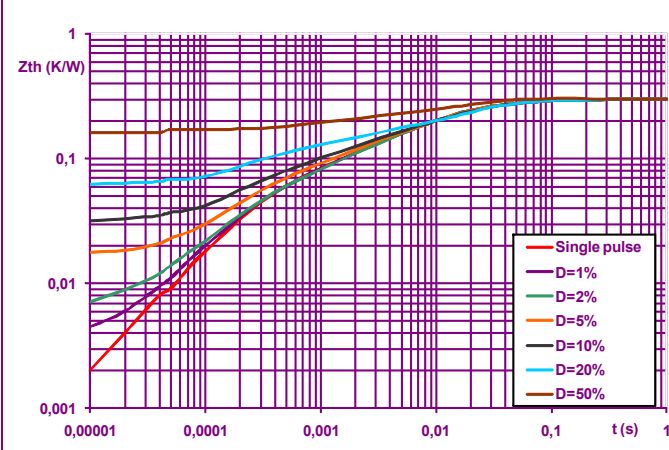

**Fig. 8 ON-STATE PEAK OVERLOAD CURRENT vs. PULSE DURATION**

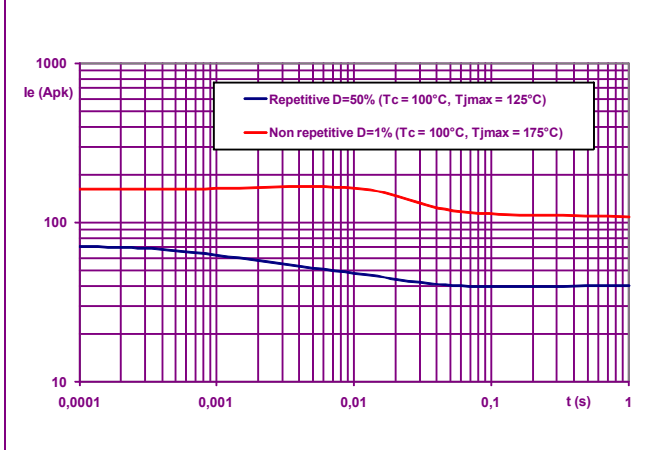

**Fig. 9 POWER DISSIPATED AND LOAD CURRENT LIMIT VS TEMPERATURE**

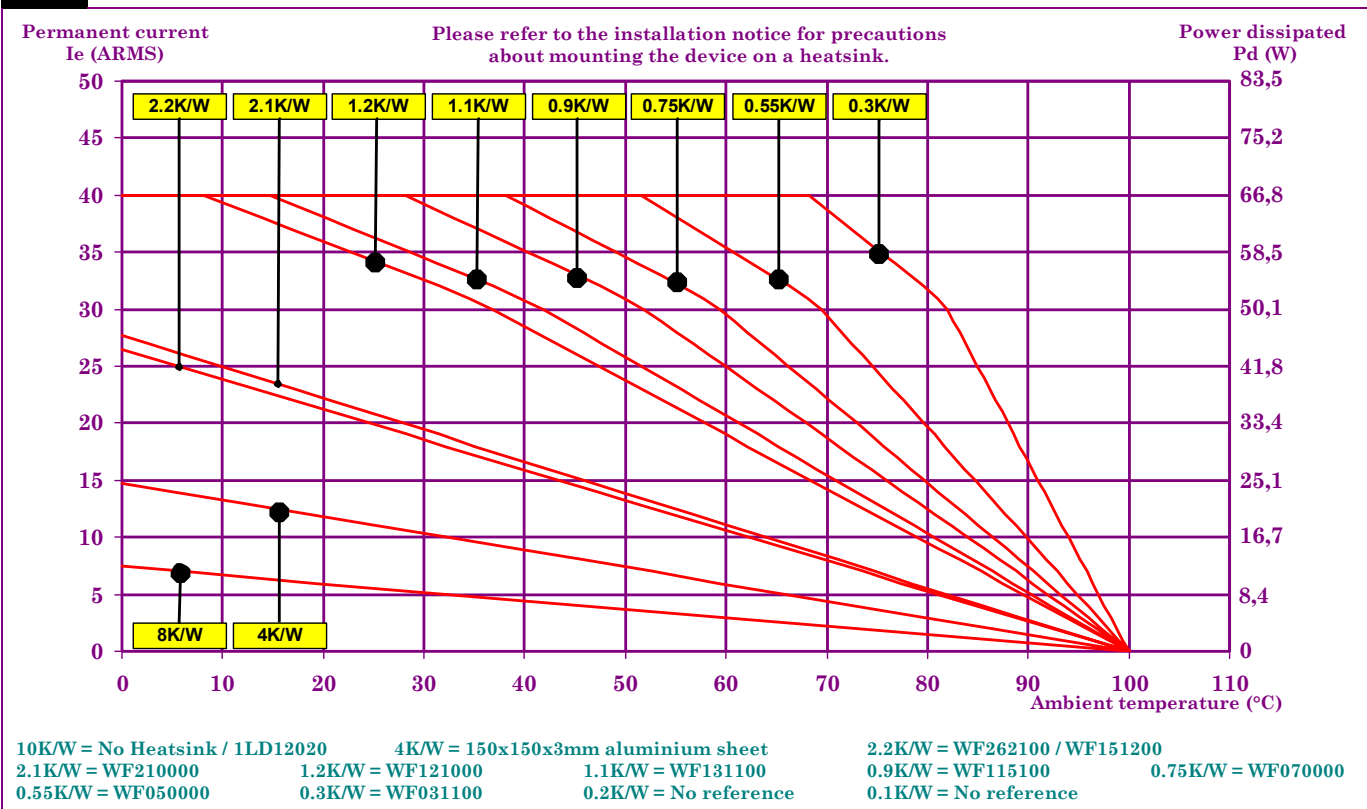

**PRELIMINARY DATA**

**GENERAL INFORMATION**

<b>CONNECTIONS</b>	<b>Connections</b>		<b>Power</b>	<b>Control</b>	
	Screwdriver advised		Philips™ NR2	Philips™ NR1	
	Min and max tightening torque		1.8 N.m	0.8 N.m	
	Insulated crimp terminals (round tabs, eyelet type)		M5	M3	

<b>MISC.</b>	<b>Display</b>		Green LED (indicates relay has switched ON)	
	<b>Housing</b>		UL94V0	
	<b>Mounting</b>		2 screws (M4x12mm)	See mounting sheet
	<b>Noise level</b>		No audible noise	
	<b>Weight</b>		100g	

**STANDARDS**

<b>GENERAL</b>	<b>Standards</b>		IEC60947-1	
	<b>Protection level</b>		IP00	
	<b>Protection against direct touch</b>		None	
	<b>CE marking</b>		Yes	
	<b>UL, cULUS and VDE approvals</b>		Pending	

<b>E.M.C. IMMUNITY</b>	TYPE OF TEST	STANDARD	LEVEL	EFFECT
	E.S.D. (Electrostatic discharges)	EN61000-4-2	Pending	?
	Radiated electromagnetic fields	EN61000-4-3	Pending	?
	Fast transients bursts	EN61000-4-4	Pending	No effect
	Electric chocks	EN61000-4-5	Pending	?
	Voltage drop	EN61000-4-11	-	


<b>E.M.C. EMISSION</b>	<b>Radiated and conducted disturbances</b>	NFEN55011	Pending	
------------------------	--	-----------	---------	--



**DIMENSIONS AND ACCESSORIES**


Fig. 10

DIMENSIONS (mm)

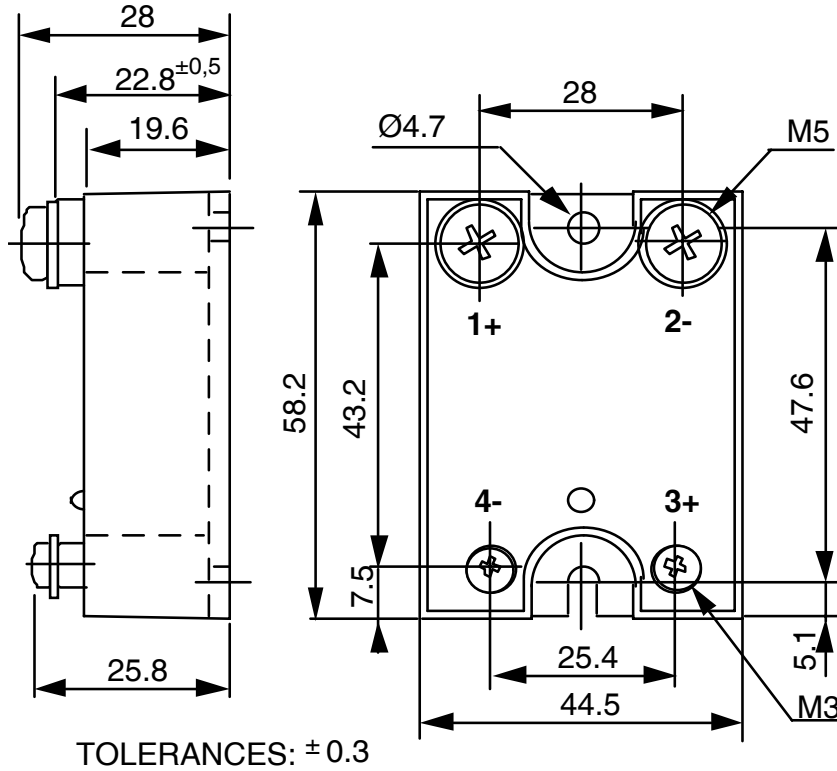

ACCESSORIES

PROTECTIVE COVER  
1K470000

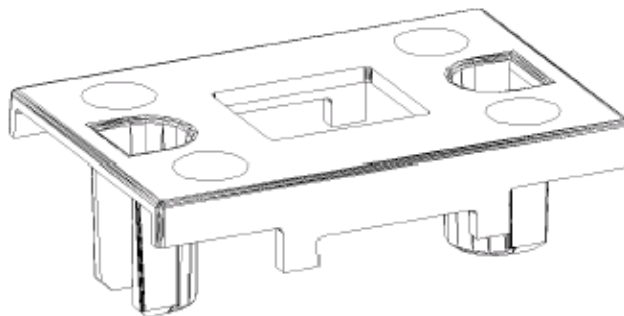

Please consult our website for other accessory references  
(Heatsinks, mounting adaptors, thermal grease...)



ISO 9001  
N° 1993/1106a

ASSOCIATION  
FRANCAISE POUR  
L'ASSURANCE DE  
LA QUALITE