




RL-1505

RL-1506, RL-1507, RL-1508


MINI-INDUCTORS

CONFORMALLY COATED

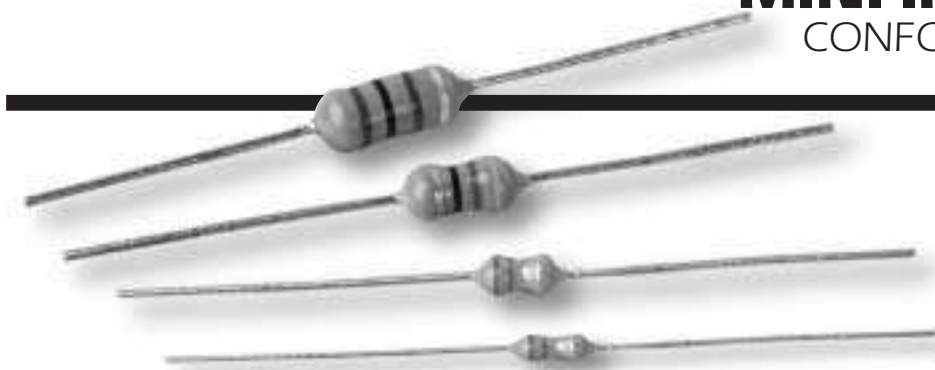

MARKING

The nominal inductance is marked by a color code as listed in the table below.

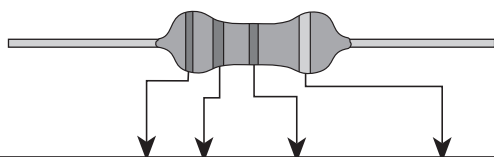

Color	Nominal inductance (μH)			Tolerance
	First figure	Second figure	Decade Power Multiplier	
Black	0		1	$\pm 20\%$
Brown	1		10	
Red	2		100	
Orange	3		1000	
Yellow	4		-	
Green	5		-	
Blue	6		-	
Purple	7		-	
Grey	8		-	
White	9		-	
Gold	--		0.1	$\pm 5\%$
Silver	--		0.01	$\pm 10\%$

Small inductors having high Q and low distributed capacity. Excellent for use where space, weight and size is a factor. Temperature range: -25°C to $+85^{\circ}\text{C}$. Suitable for automatic insertion. Standard industry color codes identify

values

Temperature Range: -25°C to $+85^{\circ}\text{C}$.

Available in bulk or as tape and reel.

Quantities specified below:

PART NO.	PIECES PER REEL
RL-1505	2500
RL-1506	5000
RL-1507	5000
RL-1508	2000



RENCO ELECTRONICS, INC.


595 International Place, Rockledge, FL 32955-4200 USA

(321) 637-1000 • Toll Free Engineering Hot line 800-645-5828



Fax: (321) 637-1600 Web Site: www.rencousa.com E-mail: sales@rencousa.com

RL-1505 Renco Part No.	Nominal Inductance (μ H)	Inductance Tolerance	Q (min.)	Self-resonant frequency (MHz) (min.)	DC Resistance Ω max	Allowed DC (mA)	Measuring frequency (MHz)
RL-1505-12	12	$\pm 10\%$	30	11.0	0.15	1.05	2.52
RL-1505-15	15			10.0	0.16	1.00	
RL-1505-18	18			9.0	0.18	0.82	
RL-1505-22	22			8.0	0.19	0.80	
RL-1505-27	27			7.0	0.21	0.70	
RL-1505-33	33		20	6.0	0.22	0.60	0.796
RL-1505-35	35			5.5	0.30	0.54	
RL-1505-47	47			5.0	0.32	0.52	
RL-1505-56	56			4.5	0.36	0.49	
RL-1505-68	68			4.0	0.40	0.45	
RL-1505-82	82		30	3.7	0.43	0.40	
RL-1505-100	100			3.3	0.56	0.37	
RL-1505-120	120			3.0	1.10	0.31	
RL-1505-150	150			2.6	1.20	0.27	
RL-1505-180	180			2.3	1.30	0.25	
RL-1505-220	220			2.0	1.40	0.22	

DC Characteristics

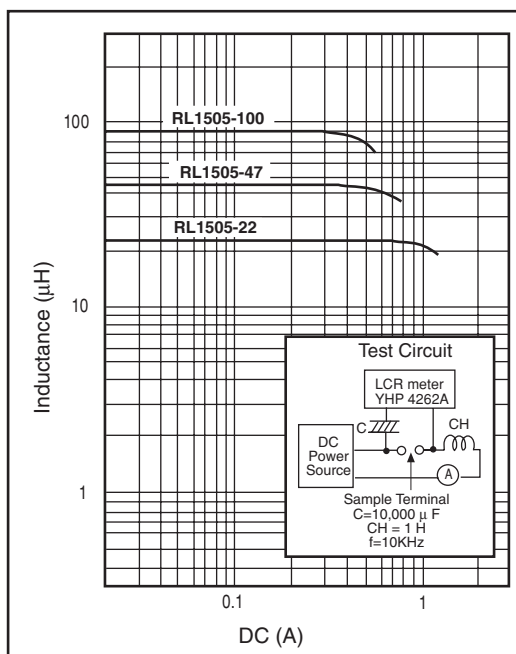


Tensile Strength

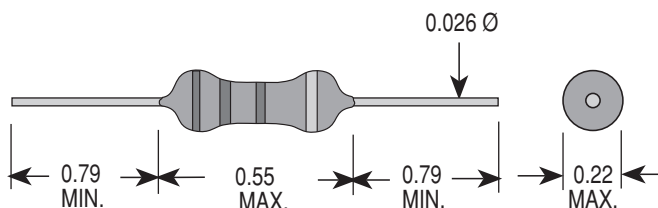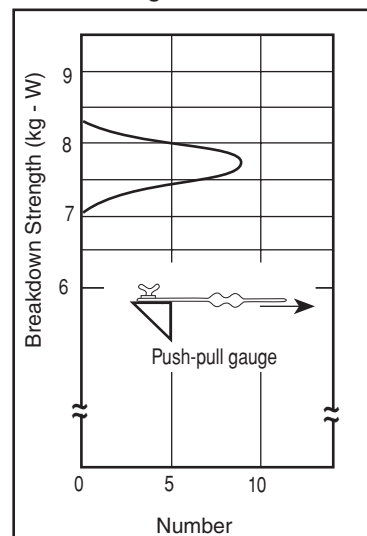

ALL DIMENSIONS IN INCHES

Temperature Characteristics

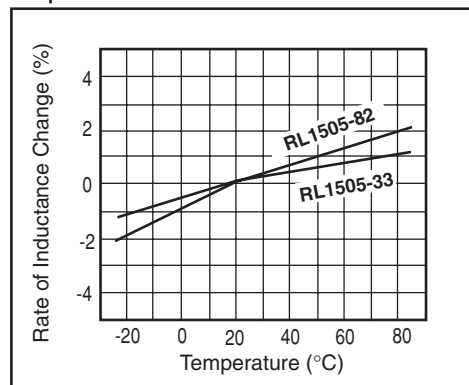

RENCO ELECTRONICS, INC.

595 International Place, Rockledge, FL 32955-4200 USA

(321) 637-1000 • Toll Free Engineering Hot line 800-645-5828

Fax: (321) 637-1600 Web Site: www.rencousa.com E-mail: sales@rencousa.com

RL-1506							
Renco Part No.	Nominal Inductance (μH)	Inductance Tolerance	Q (min.)	Self-resonant frequency (MHz)	DC Resistance Ω max	Allowed DC (mA)	Measuring frequency (MHz)
RL-1506-.22	0.22	± 20%	45	300	0.10	1400	25.2
RL-1506-.27	0.27			270	0.11	1320	
RL-1506-.33	0.33			250	0.12	1280	
RL-1506-.39	0.39			230	0.13	1200	
RL-1506-.47	0.47			220	0.14	1150	
RL-1506-.56	0.56			200	0.15	1100	
RL-1506-.68	0.68			190	0.16	1030	
RL-1506-.82	0.82			172	0.17	980	
RL-1506-1.0	1.0			157	0.19	920	
RL-1506-1.2	1.2		50	144	0.21	880	7.96
RL-1506-1.5	1.5		55	131	0.23	830	
RL-1506-1.8	1.8		55	121	0.25	790	
RL-1506-2.2	2.2		60	110	0.28	750	
RL-1506-2.7	2.7		60	100	0.30	720	
RL-1506-3.3	3.3	± 10%	65	94	0.34	670	
RL-1506-3.9	3.9			65	0.37	640	
RL-1506-4.7	4.7			56	0.39	620	
RL-1506-5.6	5.6		70	48	0.43	590	
RL-1506-6.8	6.8		75	37	0.48	550	
RL-1506-8.2	8.2		80	25	0.52	530	
RL-1506-10	10.0		65	21	0.58	500	2.52
RL-1506-12	12.0		50	19	0.63	480	
RL-1506-15	15.0			17	0.72	460	
RL-1506-18	18.0			13	0.77	430	
RL-1506-22	22.0		55	9.6	0.84	410	
RL-1506-27	27.0			7.2	0.94	390	
RL-1506-33	33.0			6.3	1.03	370	
RL-1506-39	39.0		50	6.3	1.12	350	
RL-1506-47	47.0		45	6.3	1.22	340	
RL-1506-56	56.0		40	6.2	1.34	320	
RL-1506-68	68.0			5.7	1.47	305	
RL-1506-82	82.0			35	5.3	1.62	
RL-1506-100	100.0		30	4.8	1.80	275	0.252
RL-1506-120	120.0		55	3.8	3.70	185	
RL-1506-150	150.0		45	3.5	4.20	175	
RL-1506-180	180.0		50	3.3	4.60	165	
RL-1506-220	220.0		55	3.0	5.10	155	
RL-1506-270	270.0		65	2.8	5.80	145	
RL-1506-330	330.0			2.6	6.40	137	
RL-1506-390	390.0			2.4	7.00	133	
RL-1506-470	470.0		60	2.25	7.70	126	
RL-1506-560	560.0			2.10	8.50	120	
RL-1506-680	680.0			55	1.95	9.40	113
RL-1506-820	820.0		50	1.85	10.50	105	
RL-1506-1000	1000.0			50	1.40	14.00	100




RENCO ELECTRONICS, INC.

✉ 595 International Place, Rockledge, FL 32955-4200 USA


☎ (321) 637-1000 • Toll Free Engineering Hot line 800-645-5828

📠 Fax: (321) 637-1600 🌐 Web Site: www.rencousa.com ✉ E-mail: sales@rencousa.com


DC Characteristics

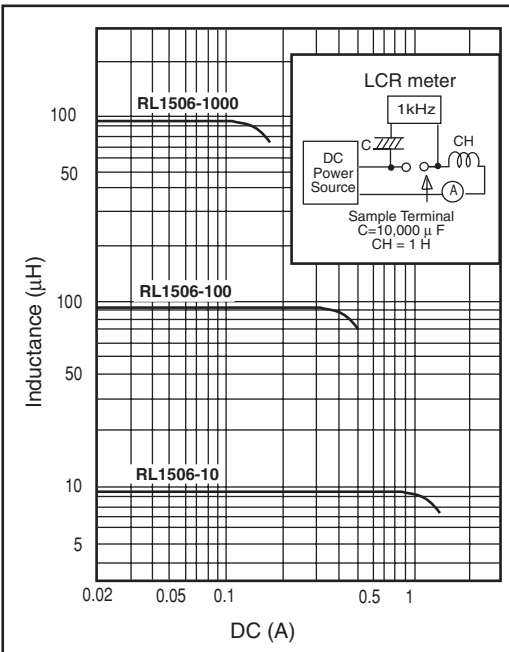



Q-Frequency Characteristics

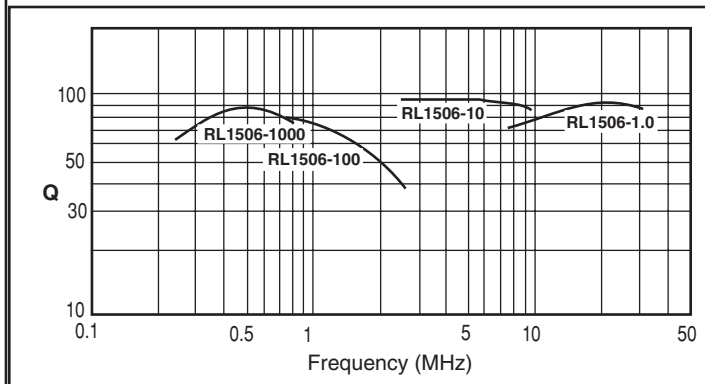

Temperature Characteristics

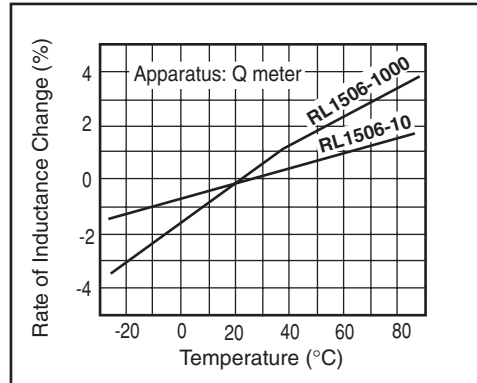

Tensile Strength

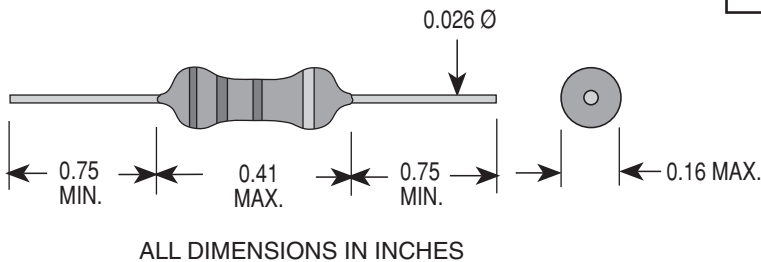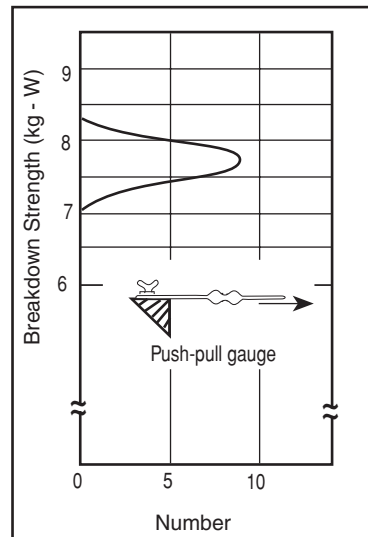

RENCO ELECTRONICS, INC.

595 International Place, Rockledge, FL 32955-4200 USA

(321) 637-1000 • Toll Free Engineering Hot line 800-645-5828

SINCE 1955 Fax: (321) 637-1600 Web Site: www.rencousa.com E-mail: sales@rencousa.com

RL-1507	Nominal Inductance (μH)	Inductance Tolerance	Q (min.)	Self-resonant frequency (MHz)	DC Resistance Ω max	Allowed DC (mA)	Measuring frequency (MHz)
Renco Part No.							
RL-1507-.22	0.22	± 20%	35	150	0.40	400	25.2
RL-1507-.27	0.27			150	0.43	380	
RL-1507-.33	0.33			150	0.48	370	
RL-1507-.39	0.39			150	0.51	350	
RL-1507-.47	0.47		40	150	0.56	330	
RL-1507-.56	0.56			150	0.61	320	
RL-1507-.68	0.68			150	0.67	310	
RL-1507-.82	0.82			150	0.74	290	
RL-1507-1.0	1.0		50	150	0.80	270	7.96
RL-1507-1.2	1.2			144	0.90	260	
RL-1507-1.5	1.5			131	1.0	250	
RL-1507-1.8	1.8			121	1.1	240	
RL-1507-2.2	2.2	110		1.2	230		
RL-1507-2.7	2.7	100		1.3	220		
RL-1507-3.3	3.3	94		1.4	210		
RL-1507-3.9	3.9	65		1.6	200		
RL-1507-4.7	4.7	56		1.7	190		
RL-1507-5.6	5.6	48		1.9	180		
RL-1507-6.8	6.8	37		2.0	175		
RL-1507-8.2	8.2	25		2.2	165		
RL-1507-10	10.0	21	2.5	160	2.52		
RL-1507-12	12.0	19	2.5	150			
RL-1507-15	15.0	17	2.8	145			
RL-1507-18	18.0	13	3.1	140			
RL-1507-22	22.0	9.6	3.4	130			
RL-1507-27	27.0	7.2	3.8	125			
RL-1507-33	33.0	6.3	4.1	120			
RL-1507-39	39.0	6.3	4.5	115			
RL-1507-47	47.0	6.3	4.9	110			
RL-1507-56	56.0	6.2	5.3	105	0.796		
RL-1507-68	68.0	5.7	5.8	100			
RL-1507-82	82.0	5.3	6.3	95			
RL-1507-100	100.0	4.8	7.0	90			
RL-1507-120	120.0	3.8	13.0	90			
RL-1507-150	150.0	3.5	15.0	85			
RL-1507-180	180.0	3.3	16.0	80			
RL-1507-220	220.0	3.0	17.0	75			
RL-1507-270	270.0	2.8	19.0	65			
RL-1507-330	330.0	2.6	20.0	60			
RL-1507-390	390.0	2.4	22.0	55			
RL-1507-470	470.0	2.25	24.0	55			
RL-1507-560	560.0	2.10	26.0	50			
RL-1507-680	680.0	1.95	28.0	45			
RL-1507-820	820.0	1.85	30.0	40			
RL-1507-1000	1000.0	1.40	33.0	40			




RENCO ELECTRONICS, INC.

✉ 595 International Place, Rockledge, FL 32955-4200 USA


☎ (321) 637-1000 • Toll Free Engineering Hot line 800-645-5828

📠 Fax: (321) 637-1600 🌐 Web Site: www.rencousa.com ✉ E-mail: sales@rencousa.com


DC Characteristics

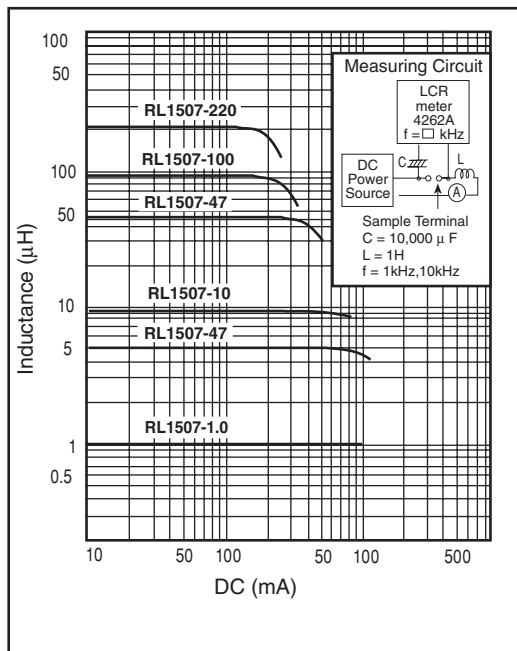



Q-Frequency Characteristics

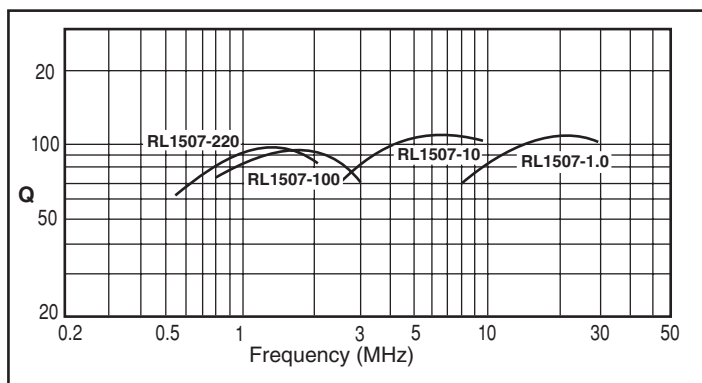

Temperature Characteristics

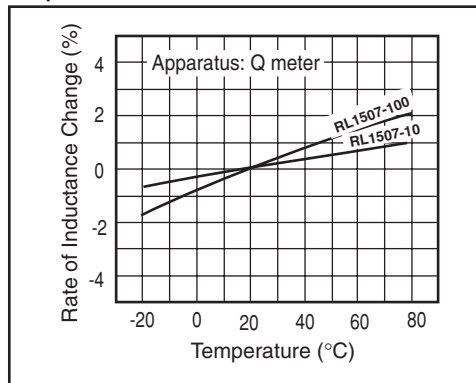

Tensile Strength

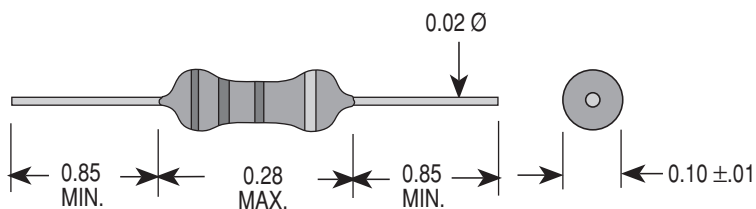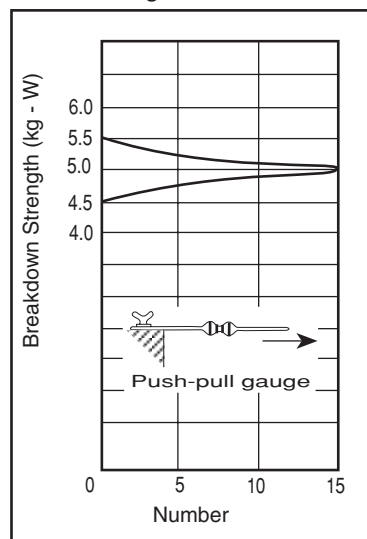


RENCO ELECTRONICS, INC.

595 International Place, Rockledge, FL 32955-4200 USA

(321) 637-1000 • Toll Free Engineering Hot line 800-645-5828

SINCE 1955 Fax: (321) 637-1600 Web Site: www.rencousa.com E-mail: sales@rencousa.com

RL-1508 Renco Part No.	Inductance		Q min	Test FREQ. (MHz)	S.R.F. (MHz) min.	DCR (OHM) max	IDC (mA)
	L (μH)	TOI % ±					
RL-1508-.10	0.10	20	35	25.20	300.00	0.18	700
RL-1508-.12	0.12	20	35	25.20	300.00	0.20	660
RL-1508-.15	0.15	20	35	25.20	300.00	0.22	620
RL-1508-.18	0.18	20	35	25.20	300.00	0.24	600
RL-1508-.22	0.22	20	35	25.20	150.00	0.40	400
RL-1508-.27	0.27	20	35	25.20	150.00	0.43	380
RL-1508-.33	0.33	20	35	25.20	150.00	0.48	370
RL-1508-.39	0.39	20	35	25.20	150.00	0.51	350
RL-1508-.47	0.47	20	35	25.20	150.00	0.56	330
RL-1508-.56	0.56	20	35	25.20	150.00	0.61	320
RL-1508-.68	0.68	20	35	25.20	150.00	0.67	310
RL-1508-.82	0.82	20	35	25.20	150.00	0.74	290
RL-1508-1.0	1.00	20	35	25.20	150.00	0.80	270
RL-1508-1.2	1.20	20	40	7.960	110.00	0.90	260
RL-1508-1.5	1.50	20	40	7.960	70.00	1.00	250
RL-1508-1.8	1.80	20	40	7.960	60.00	1.10	240
RL-1508-2.2	2.20	20	40	7.960	45.00	1.20	230
RL-1508-2.7	2.70	20	40	7.960	40.00	1.30	220
RL-1508-3.3	3.30	20	40	7.960	38.00	1.40	210
RL-1508-3.9	3.90	10	40	7.960	36.00	1.50	200
RL-1508-4.7	4.70	10	40	7.960	32.00	1.70	190
RL-1508-5.6	5.60	10	40	7.960	30.00	1.90	180
RL-1508-6.8	6.80	10	40	7.960	28.00	2.00	175
RL-1508-8.2	8.20	10	40	7.960	26.00	2.20	165
RL-1508-10	10.0	10	40	7.960	24.00	2.50	160
RL-1508-12	12.0	10	40	2.520	22.00	2.50	150
RL-1508-15	15.0	10	40	2.520	20.00	2.80	145
RL-1508-18	18.0	10	40	2.520	18.00	3.10	140
RL-1508-22	22.0	10	40	2.520	17.00	3.40	100
RL-1508-27	27.0	10	40	2.520	16.00	4.30	80
RL-1508-33	33.0	10	40	2.520	14.00	4.70	75
RL-1508-39	39.0	10	40	2.520	13.00	5.20	74
RL-1508-47	47.0	10	40	2.520	12.00	5.80	70
RL-1508-56	56.0	10	40	2.520	11.00	6.40	68
RL-1508-68	68.0	10	40	2.520	10.00	7.20	64
RL-1508-82	82.0	10	40	2.520	9.50	11.00	46
RL-1508-100	100	10	40	2.520	9.00	12.00	44
RL-1508-120	120	10	40	0.796	8.00	13.00	42
RL-1508-150	150	10	40	0.796	6.00	16.00	39
RL-1508-180	180	10	40	0.796	5.50	18.00	37
RL-1508-220	220	10	40	0.796	5.00	20.00	35
RL-1508-270	270	10	40	0.796	4.60	25.00	28
RL-1508-330	330	10	40	0.796	4.20	30.00	26
RL-1508-390	390	10	40	0.796	3.80	34.00	25
RL-1508-470	470	10	40	0.796	3.50	38.00	24

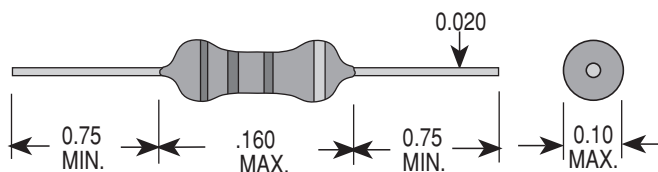

ALL DIMENSIONS IN INCHES



RENCO ELECTRONICS, INC.

595 International Place, Rockledge, FL 32955-4200 USA

(321) 637-1000 • Toll Free Engineering Hot line 800-645-5828

Fax: (321) 637-1600 Web Site: www.rencousa.com E-mail: sales@rencousa.com