


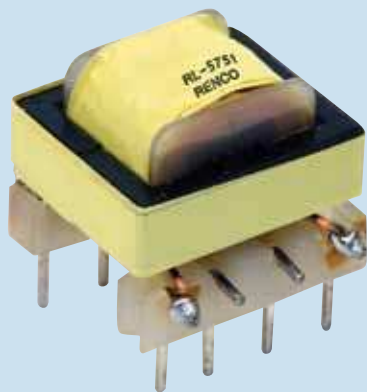

RL-5751

FLYBACK TRANSFORMER FOR NATIONAL SEMICONDUCTOR (LM-258X) SIMPLE SWITCHER SERIES

DESCRIPTION

- Flyback Transformer
- LM-258X-T7

ENVIRONMENTAL DATA

- Storage temperature range:
-55°C to +130°C
- Operating temperature range:
-40°C to +130°C

PACKAGING INFORMATION

- Packaging information: pg. 495

FEATURES & APPLICATIONS

- Compact through-hole transformer
- Flyback topology power supplies

Verify operation with sample in actual circuit. Order samples at www.rencousa.com.

MECHANICAL DIMENSIONS

U.S. Standard (mm)


PART NUMBER	A (MAX.)	B	C (MAX.)	D (MAX.)	E (MIN.)	F	G
RL-5751	0.930 (23.62)	0.515 (13.08)	0.860 (21.84)	0.660 (16.76)	0.175 (4.44)	0.200 (5.08)	0.150 (3.81)

PART NUMBER	PART WEIGHT
RL-5751	12.0g (0.42oz)


TEST MEASUREMENTS:

1. L (4-1) = 47.0 μ H $\pm$ 10% AT 0.1 VRMS 10 kHz
2. RDC (1-4) = 0.036 Ω $\pm$ 15% AT 25°
3. HIPOT: 600 VRMS BETWEEN (4-1) AND OTHER WINDINGS


FRONT VIEW

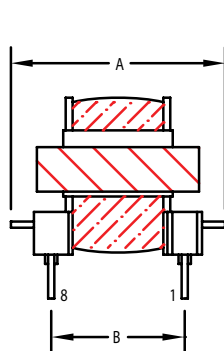

SIDE VIEW

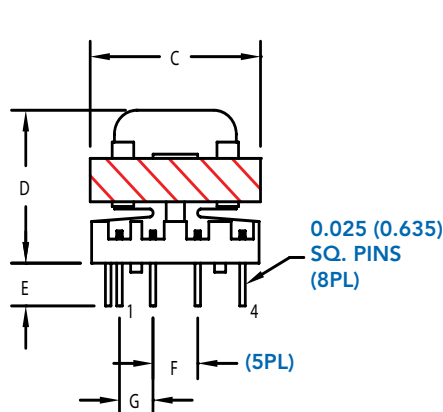

SCHEMATIC

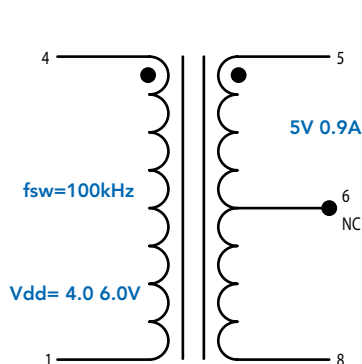

RENCO ELECTRONICS INC.

595 International Place, Rockledge, FL 32955-4200 USA • www.rencousa.com • ISO 9001 Certified
Toll Free Engineering Hot Line: 800.645.5828 • P: 321.637.1000 • F: 321.637.1600

