


SYSTEM HOST BOARD WITH MULTI-CORE PROCESSOR

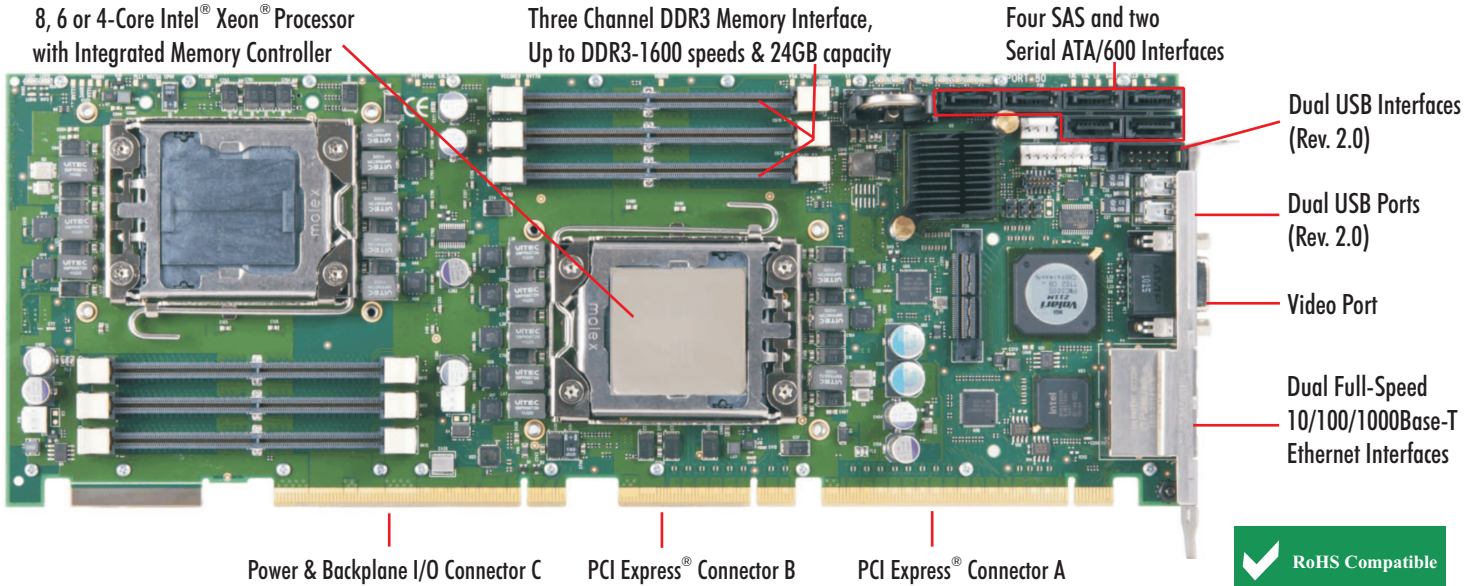

Here's a brief list of the BXTS7059 single board computer highlights:

- System performance boost with 8, 6 or 4-core CPU architecture
- On-board power management and system security features
- Deployment risks lowered with extended-life board design
- 5-year product warranty maximizes system ROI
- On-board interface support for either SAS or SATA/300 drives
- Built-in system support for PCI Express 1.1, 2.0 and 3.0 cards

PROCESSOR:

Intel® Xeon® E5-2400 Series Processor, 1.8GHz - 2.4GHz*
 Processor Package: LGA1356

*8, 6 and 4-core processor options

The DDR3 integrated memory controllers in the Intel® Xeon® E5-2400 series processors support DDR3-1600 memory interface speeds. The PCI Express® 3.0 links available directly out of the processors allow BXTS7059 system designs that deliver faster performance in a wide variety of data intensive applications. Other features include:

- Extended-life, embedded components provide longevity (E5-2430)
- Improved CPU thermal design saves power
- Eight & six-core micro-architecture with Intel® Hyper-Threading doubles core processing capability (E5-2448L & E5-2430)
- Intel® Advanced Management Technology (Intel® AMT7.0 - Standard*)
- Intel® Advanced Vector Extensions (Intel® AVX - All E5-2400 CPUs)
- Integral PCI Express Gen 3.0 links support all PCIe devices

PLATFORM CONTROLLER HUB (PCH):

The Intel® C604 is a Platform Controller Hub (PCH) that takes the place of the traditional multi-component chipset. The PCH design approach saves power while providing enhanced system host board I/O, PCI Express and Ethernet interface capabilities.

THREE ETHERNET INTERFACES - 10/100/1000BASE-T:

Two of the three BXTS7059's Gigabit Ethernet interfaces drive the board's I/O bracket LAN ports. The third LAN is routed for use on cable header P22 or as a PICMG 1.3 backplane LAN via SHB edge connector C. Trenton has a 24" (610mm) cable available (part no. 193-500001150-00) for use with P22 that has the mating P22 connector on one end and an Ethernet LAN connector mounted into an additional I/O plate on the other.

PCI EXPRESS® GEN 3.0, 2.0 and 1.1 INTERFACES:

Trenton's BXTS7059 supports system designs with one x16, two x8 or four x4 PCI Express® links on a PICMG® 1.3 backplane. These links plus an additional x4 PCIe link (B0) and eight PCIe reference clocks are supplied on SHB edge connectors A & B. Link B0 may also function as four, x1 PCIe links. Trenton's optional IOB33 module can be used on the board to provide additional x4 PCIe expansion link to the system. Upon system power-up, the BXTS7059 automatically configures all of the PCIe links between the board and PCIe target devices for optimum data communication. This automatic link negotiation process may result in data transfer communications between the SHB and the system option cards to take place at either PCI Express 3.0, 2.0 or 1.1 link speeds. The actual link speed will be determined by a number of factors such as PCI Express endpoint types, system backplane design and other system design parameters. PCI Express auto-negotiation between the BXTS7059 and the system option cards is fully supported thereby enabling system design support for x1, x4, x8 and x16 PCI Express cards.

PCI EXPRESS CONFIGURATION:

- PCI Express - Edge Connectors - One x16, two x8 or four x4
 A & B links, plus one x4 or 4 - x1 links
 - Eight reference clocks
- PCI Express - IOB33 - One x4 link

VIDEO:

Trenton's BXTS7059 SHB features a Graphics Processing Unit (GPU) driven with a x1 PCIe link from the PCH of the board. The GPU has 8MB of on-board video memory to support pixel resolutions up to 1920 x 1200 (WUXGA) with a 64K color depth.

DDR3-1600 MEMORY INTERFACE:

The BXTS7059's memory interface is a three-channel interface from the Intel® Xeon® E5-2400 Series Processor. The long-life Intel® Xeon® E5-2448L operates at the DDR3-1600 memory interface speed with peak data transfer rates up to 1600 MT/s per channel. All processor options shall use DDR3-1600 Mini-DIMMs on the SHB; however, CPUs like the Intel® Xeon® E5-2430 will clock-down to the DDR3-1333 memory interface speed. ECC registered memory must be used on the BXTS7059 and Trenton recommends PC3-12800, DDR3-1600 Mini-DIMMs for all BXTS7059 processor options. A maximum memory capacity of 24GB is supported when using 8GB DDR3 Mini-DIMMs.

SERIAL ATTACHED SCSI & SERIAL ATA PORTS:

An integrated Serial Attached SCSI (SAS) / Serial ATA (SATA) controller in the Intel® C604 PCH provides support for either four SAS and two SATA ports or six SATA ports. Two SATA ports deliver data transfer rates up to 600MB/s while the remaining four ports support 300MB/s transfers. Independent SAS/SATA drive operation and RAID drive array configurations are supported. An additional SATA/300 interface is routed to edge connector C for use on a backplane.



