

Part Number HSR-003D Contact Form A Switch Configuration SPST Rev. J

20+ Year History in Medical Applications

Features	Advantages
<ul style="list-style-type: none"> • Hermetically sealed contacts • .055 height profile • .010 lead diameter • Switch materials are Lead free and RoHS compliant • Optimal glass size to wire ratio 	<ul style="list-style-type: none"> • Extended operations in extreme environments • Not ESD sensitive • Proven reliability • Tens of millions in service • Hi-Rel version available • Excellent historical performance

Electrical Specifications


Power		Watts - maximum	1
Voltage	Switching	VDC - maximum	30
	Breakdown	VDC - minimum	200
Current	Switching		0.05
	Carry		1.10
Resistance	Initial Contact Resistance	Ohm - maximum	0.75
	Insulation Resistance	Ohm - minimum	1 E11
Capacitance	Contact	pF - typical	0.3
Temperature	Operating	°C	-40 to +125
	Storage	°C	-40 to +200

Magnetic Specifications

Pull - In Range		Ampere Turns	4-20
Test Coil		NARM RS-421-A	Coil I

Physical/Operational Specifications

Capsule Volume	Excluding Leads	CC - nominal	0.0074
Contact Material			Durel
Operate Time	Including Bounce	mSeconds - maximum	0.20
Release Time		mSeconds - maximum	0.10

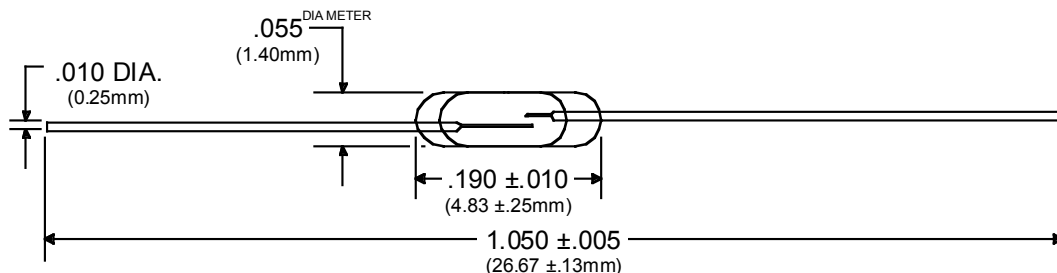

Notes:

- (1) Specifications are not constant across entire magnetic range.
- (2) Customer must exercise care in handling, mounting, lead forming, and cutting to prevent damage to glass capsule and/or switch sensitivity.
- (3) For information or custom configurations about performance, mounting options or packaging, contact our Sales (4) department.

Information contained hereon is for informational purposes only and should not be deemed as accurate for a specific application. Consult factory for specific application information and/or latest revision.