

Part Number HSR-072R Contact Form A Switch Configuration SPST Rev. C

Maximum Sensitivity in a Miniature Size

| Features | Advantages |
|---|--|
| <ul style="list-style-type: none"> Hermetically sealed contacts Switch materials are Lead free and RoHS compliant | <ul style="list-style-type: none"> Extended operations in extreme environments Not ESD sensitive Excellent historical performance |

Electrical Specifications


| | | | |
|-------------|----------------------------|-----------------|-------------|
| Power | | Watts - maximum | 4 |
| Voltage | Switching | VDC - maximum | 30 |
| | Breakdown | VDC - minimum | 300 |
| Current | Switching | | 0.2 |
| | Carry | | TBD |
| Resistance | Initial Contact Resistance | Ohm - maximum | 0.20 |
| | Insulation Resistance | Ohm - minimum | 1 E11 |
| Capacitance | Contact | pF - typical | 0.6 |
| Temperature | Operating | °C | -40 to +125 |
| | Storage | °C | -40 to +200 |

Magnetic Specifications

| | | | |
|-----------------|--|---------------|--------|
| Pull - In Range | | Ampere Turns | 7-20 |
| Test Coil | | NARM RS-421-A | Coil I |

Physical/Operational Specifications

| | | | |
|------------------|------------------|--------------------|---------|
| Capsule Volume | Excluding Leads | CC - nominal | 0.03 |
| Contact Material | | | Rhodium |
| Operate Time | Including Bounce | mSeconds - maximum | 0.50 |
| Release Time | | mSeconds - maximum | 0.10 |

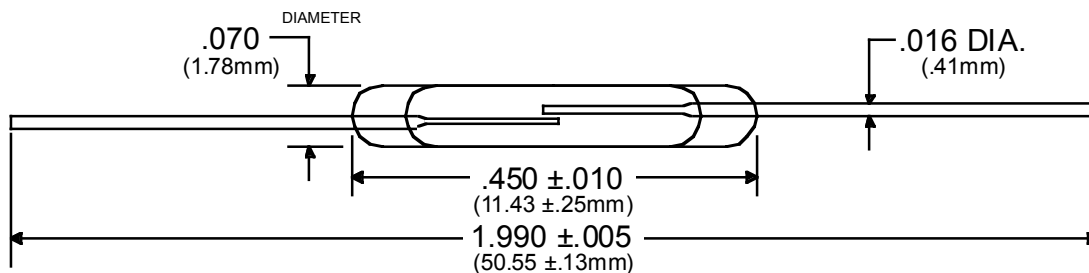

Notes:

- (1) Specifications are not constant across entire magnetic range.
- (2) Customer must exercise care in handling, mounting, lead forming, and cutting to prevent damage to glass capsule and/or switch sensitivity.
- (3) For information or custom configurations about performance, mounting options or packaging, contact our Sales (4) department.

Information contained hereon is for informational purposes only and should not be deemed as accurate for a specific application. Consult factory for specific application information and/or latest revision.