

Part Number PRX+7200 Contact Form C Switch Configuration SPDT Rev. F

Low-Profile Proximity Sensor


Features	Advantages
<ul style="list-style-type: none"> • Hermetically sealed contacts • Low profile housing • Black ABS housing 	<ul style="list-style-type: none"> • Extended operations in extreme environments • Not ESD sensitive • Custom sensitivity and configurations available • Housing material flame rating: UL94

Electrical Specifications

Power		Watts - maximum	3
Voltage	Switching	VDC - maximum	30
	Breakdown	VDC - minimum	200
Current	Switching	Amp - maximum	0.1
	Carry	Amp - maximum	TBD
Resistance	Initial Contact Resistance	Ohm - maximum	.50
	Insulation Resistance	Ohm - minimum	1 E9
Capacitance	Contact	pF - typical	1.1
Temperature	Operating	°C - maximum	+80
	Storage	°C	-40 to +105

Physical/Operational Specifications

Housing Volume	Excluding Connection	CC - nominal	1.2
External Connection	28 AWG	3 Cond. Cable	PVC
Must Operate	Distance (d)	Inches	0.500
Must Release	Distance (d)	Inches	1.000
Operate Time	Including Bounce	mSeconds - maximum	0.6
Release Time		mSeconds - maximum	0.6

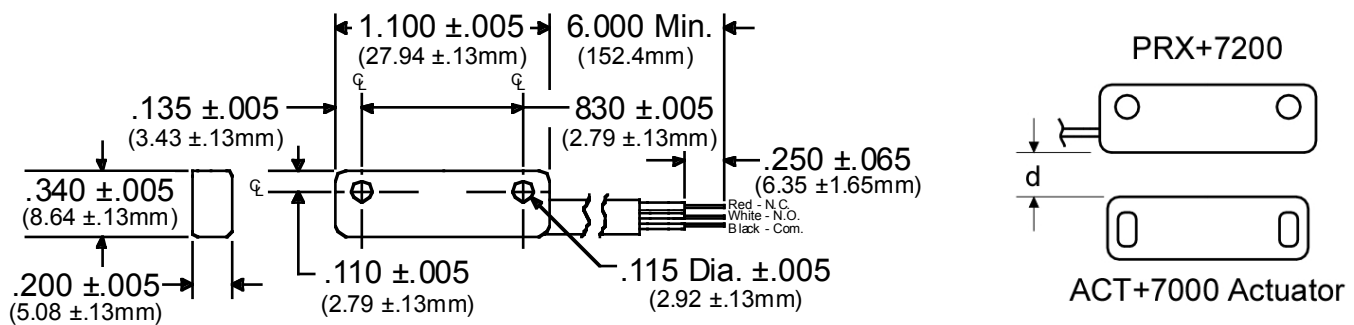

- Notes:
- (1) Specifications are not constant across entire magnetic range.
 - (2) Customer must exercise care in handling and mounting to prevent damage to internal components and subsequent changes to sensor performance.
 - (3) For information about performance, custom configuration (i.e. wire length or color; connectors; operational variation), or packaging contact our Sales department.
 - (4) Information contained hereon is for informational purposes only and should not be deemed as accurate for a specific application. Consult factory for specific application information and/or latest revision.