


# 25/E2-Series Inclinometer

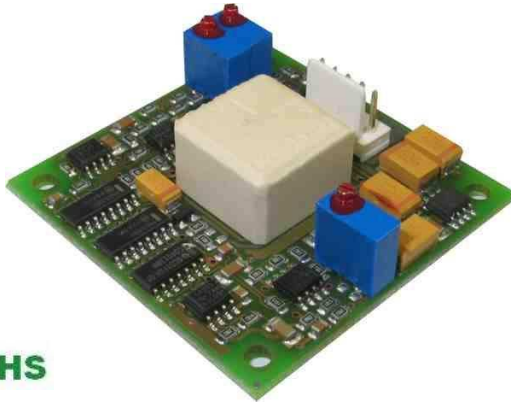

- Dual axis inclinometer
- Measurement range  $\pm 25^\circ$
- analogue voltage output signal
- OEM module

## DESCRIPTION

**The 25/E2-Series** is a biaxial inclination sensor as a PCB Module for OEM use with measurement range  $\pm 25^\circ$ . It consists of one dual basic inclination sensor cells based on a conductance measurement principle and their complete electronic biasing and readout, which is carefully designed in order to minimize drift and temperature effects.

## FEATURES

- High zero point stability
- Analogue voltage output signal
- Easy for mounting
- PCB level
- Fast response time
- Low drift sensitivity
- Low noise level

## APPLICATIONS

- Road construction machines
- Vehicle applications
- Building control
- Mobile and stationary cranes
- Hydraulic leveling
- Platform leveling
- Drilling machines

# 25/E2-Series Inclinometer


## PERFORMANCE SPECIFICATIONS

	Conditions	Min	Type	Max	Unit
Measurement range		-25		+25	°
Resolution			0.01		°
Accuracy	Ta = 0°...70°C,		0.3		°
Non-linearity			1.5		%[FS]
Cross sensitivity			0.2		%[FS]
Power supply (1)	Type 3		+5		VDC
Voltage output signal(1)	Type 3, to Vref :+2.5VDC	-2		+2	V
Power supply(2)	Type 4	+12		+24	VDC
Voltage output signal (2)	Type 4, to Vref : +2.5VDC	-2		+2	V
Power supply(3)	Type 7	+12		+24	VDC
Voltage output signal(3)	Type 7, to GND	+2.5		+2.5	V
Current consumption		15		30	mA
Operation temperature range		-25		+70	°C
Storage temperature range		-40		+85	°C
Weight			20		g
Dimensions	W x D x H		50 x 50 x 14		mm

- (1) notice pinning schema type 3
- (2) notice pinning schema type 4
- (3) notice pinning schema type 7

# 25/E2-Series Inclinometer

## DIMENSIONS [MM]

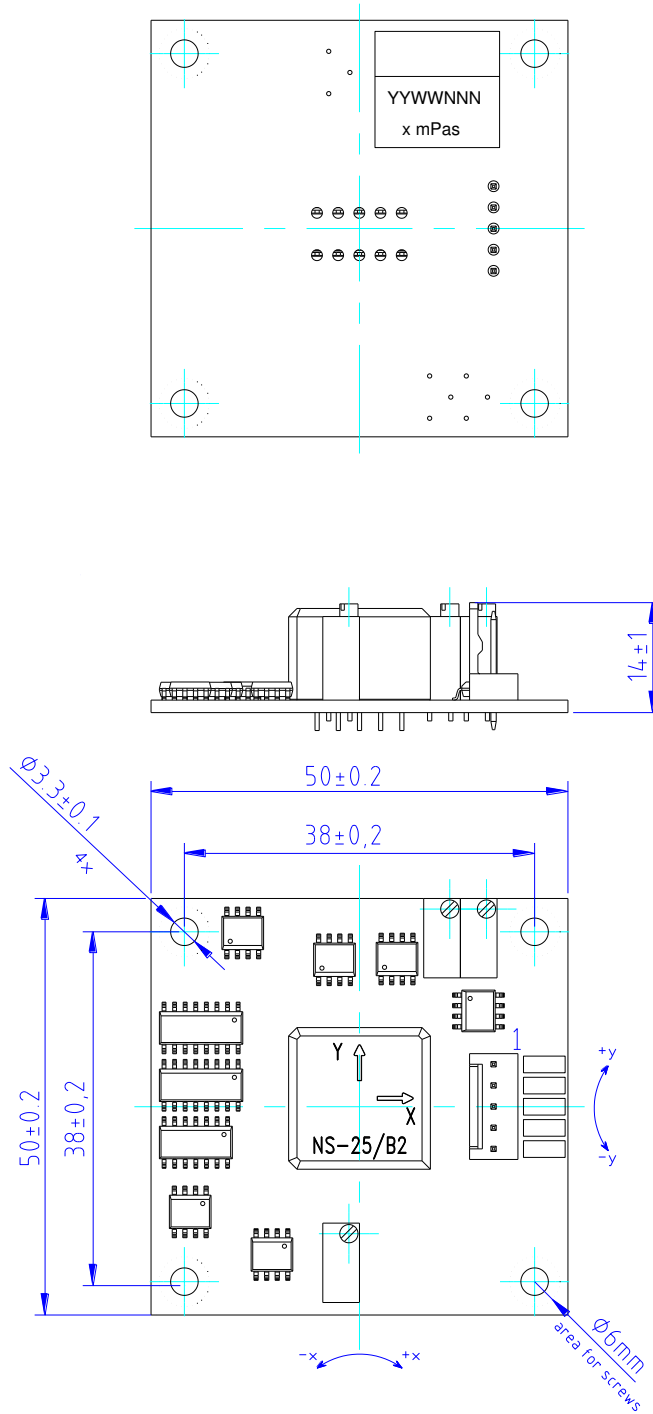


# 25/E2-Series Inclinometer

## PINNING


### Pinning schema type 3

Pin	Name	Description	Type
1	Vcc	Positive power supply +5 VDC	Supply, Input
2	Vref	Reference potential +2.5VDC, S-GND	Output
3	GND	Ground (negative supply voltage)	Supply, Input
4	Out X	Output voltage signal X axis	Output
5	Out Y	Output voltage signal Y axis	Output




### Pinning schema type 4

Pin	Name	Description	Type
1	Vcc	Positive power supply +12...+24 VDC	Supply, Input
2	Vref	Reference potential +2.5VDC, S-GND	Output
3	GND	Ground (negative supply voltage)	Supply, Input
4	Out X	Output voltage signal X axis	Output
5	Out Y	Output voltage signal Y axis	Output




### Pinning schema type 7

Pin	Name	Description	Type
1	Vcc	Positive power supply +12...+24 VDC	Supply, Input
2	GND	Ground (negative supply voltage)	Supply, Input
3	n.c.	n.c.	-
4	Out X	Output voltage signal X axis	Output
5	Out Y	Output voltage signal Y axis	Output



## MOUNTING

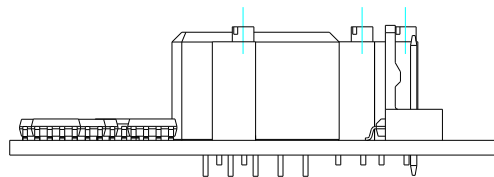

This kind of unit is for horizontal mounting only suitable.

## 25/E2-Series Inclinometer

### ORDERING INFORMATION

PART NUMBERING	UNIT	SHORT DESCRIPTION
G-NSE2-014	NS-25/E2 type 3	dual axis, +/- 25° angle, Vcc: + 5 VDC, output +/-2 V
G-NSE2-015	NS-25/E2 type 4	dual axis, +/- 25° angle, Vcc: +12...+24VDC, output +/-2 V
G-NSE2-013	NS-25/E2 type 7	dual axis, +/- 25° angle, Vcc: +12...+24VDC, output +/- 2.5V

NORTH AMERICA	EUROPE	ASIA
Measurement Specialties, Inc. 1000 Lucas Way Hampton, VA 23666 United States Phone: +1-800-745-8008 Fax: +1-757-766-4297 Email: <a href="mailto:sales@meas-spec.com">sales@meas-spec.com</a> Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a>	MEAS Deutschland GmbH Hauert 13 D-44227 Dortmund Germany Phone: +49-(0)231-9740-0 Fax: +49-(0)231-9740-20 Email: <a href="mailto:info.de@meas-spec.com">info.de@meas-spec.com</a> Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a>	Measurement Specialties China Ltd. No. 26, Langshan Road High-tech Park (North) Nanshan District, Shenzhen 518057 China Phone: +86-755-33305088 Fax: +86-755-33305099 Email: <a href="mailto:info.cn@meas-spec.com">info.cn@meas-spec.com</a> Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a>

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.