

P700



- Rugged Design for Harsh Environments
- Versatile Packaging Design
- Low and High Level Output Signals
- Intrinsic Safety Approval to Ex ia IIc T4
- High Overpressure Capability

DESCRIPTION

P700 series pressure transducers are designed for high reliability and stability. The all welded construction incorporates a double cantilever beam with bonded foil strain gauges. Coupling to the pressure diaphragm via a force rod, gives excellent thermal isolation from the fluid or gas being measured. High overload protection is an integral part of the design. These units are capable of sensing extremely small changes of applied pressure and are relatively insensitive to vibration, altitude and shock.

For parts requiring RoHS compliance, please contact factory.

FEATURES

- Low and High Level Output
- All Welded Construction
- High Pressure Overload Protection
- Pressure Ranges 0-10,000 PSI (0.7 to 700 bars)
- 2 Wire 4-20 mA Option BASEEFA and Cenelec Approval Class Ex ia IIc T4

APPLICATIONS

- Hydraulic Pressure Monitoring
- Torpedo Depth Sensing
- Vehicle Brake System Monitoring
- Military and Commercial Aircraft

PERFORMANCE SPECS

Low Level Output			
Model Number	P711/9	P721/4	P701/9
Input Supply	10VDC/AC RMS	10VDC/AC RMS	10VDC/AC RMS
Voltage (Max)	12V	12V	12 V
Impedance (ohms)	350	350	350
Current	±5%	±5%	±5%
	-	-	-
Output at +25 °C			
Full Range Output with 1 metre cable	25mV, ±2%	25mV, ±2%	25mV, ±1%
Impedance (ohm)	350, ±5%	350, ±5%	350, ±5%
Current (mA max)	-	-	-
Residual Unbalance % F.R.O.	< ± 2	< ± 2	< ± 1
Accuracy			
Combined Non-Linearity (Typical)	± 0.2	± 0.2	± 0.18
Hysteresis and Non Repeatability % F.R.O. (Max)	± 0.2	± 0.5	± 0.3
Combined Thermal M.R.	± 0.03	± 0.03	± 0.02
Zero and Sensitivity Error %F.R.O./ °C H.R.	± 0.03	± 0.03	± 0.015
Physical			
Max. Height (L/mm)	64.4	64.4	64.4
Cable version (mm/in.)	83/3.27	83/3.27	83/3.27
Connector version (mm/in.)	83/3.27	83/3.27	83/3.27
Weight (gm)	230	230	230

P700

PERFORMANCE SPECS (CONT)

High Level Output					
Model Number	P741/9	P751/9	P761/9	P781/9	P791/9
Input Supply					
Voltage (Max)	10VDC/AC RMS	11-18VDC	18-32VDC	10-36VDC	±15VDC
Impedance (ohms)	12 V max	-	-	-	-
Current	30-35mA	20-40mA	30-40mA	-	30mA
Output at +25 °C					
Full Range Output with 1 metre cable	5V ±1%	2.5V ±1%	5V ±1%	4-20 mA	5.0 ±1%
Impedance (ohm)	<10 ohm	<10 ohm	<10 ohm	Load Resist. 1.0 k max. at 36VDC	<10 ohm
Current (mA max)	5	5	5	-	5
Residual Unbalance % F.R.O.	< ± 1	< ± 2	< ± 1	1 < ± 1	< ± 1
Accuracy					
Combined Non-Linearity (Typical)	± 0.18	± 0.18	± 0.18	± 0.18	± 0.18
Hysteresis and Non Repeatability % F.R.O. (Max)	± 0.25	± 0.25	± 0.25	± 0.25	± 0.25
Combined Thermal M.R.	± 0.02	± 0.02	± 0.02	± 0.02	± 0.02
Zero and Sensitivity Error %F.R.O./ °C H.R.	± 0.015	± 0.015	± 0.015	± 0.015	± 0.015
Physical					
Max. Height (L/mm)	91.6	91.6	91.6	91.6	91.6
Cable version (mm/in.)	99/3.90	114/4.49	114/4.49	129/5.07	99/3.90
Connector version (mm/in.)	99/3.90	114/4.49	114/4.49	129/5.07	99/3.90
Weight (gm)	250 gm	250 gm	250 gm	250 gm	250 gm

COMMON SPECIFICATIONS

Pressure Ranges	Gauge or absolute reference
High (psi)	0-75, 100, 150, 200, 250, 350, 500, 750, 1000, 1500, 2000, 2500, 3500, 5000, 7500, 10,000
(bar)	0-5, 0, 7, 10, 15, 20, 25, 35, 50, 70, 100, 150, 200, 250, 350, 500, 700
Medium (psi)	0-10, 15, 20, 25, 35, 50
(bar)	0-0.7, 1.0, 1.5, 2.0, 2.5, 3.5
DIN (bar)	0.6, 1, 1.6, 2.5, 4, 6, 10, 16, 25, 40, 60, 100, 160, 250, 400, 600
Pressure Limit	<5x full range pressure or 12,000 psi whichever is less
Burst Pressure	>10x full range pressure or 20,000 psi whichever is less
Pressure Media	Liquids or gases compatible with 17-4 PH and 17-7 PH stainless steel or Inconel 625
Shunt Calibration	80% ±5% full range pressure
Residual Unbalance	<±1% F.R.O. P700 <±2% F.R.O. P720
Temperature Range	
Operable	-65 °F to 250 °F (-54 °C to 120 °C)
Compensated	32 °F to 212 °F (0 °C to 100 °C)
Humidity	
Plug Outlet	95% Relative humidity
Cable Outlet	Immersible to 1000 feet
Acceleration Response	< 0.10% F.R.O./g (Medium range) <0.02% F.R.O./g (High range)
Natural Frequency	Approx 2.5 kHz for 10 psi to approx 40 kHz for 10,000 psi
Insulation Resistance	500 MOhm at 50 VDC

1. A low current consumption version is available (1000 ohm bridge) at extra cost.

P700


CONNECTIONS

CONNECTIONS:


CABLE CONNECTIONS

RED* PIN A* EXCITATION (+)
WHITE PIN D EXCITATION (-)
YELLOW PIN B OUTPUT (+)
BLUE* PIN C* OUTPUT (-)
VIOLET PIN E } 80% Shunt calibration
GREY PIN F

* 2-Wire transmitter connections
0 Volt P791/4

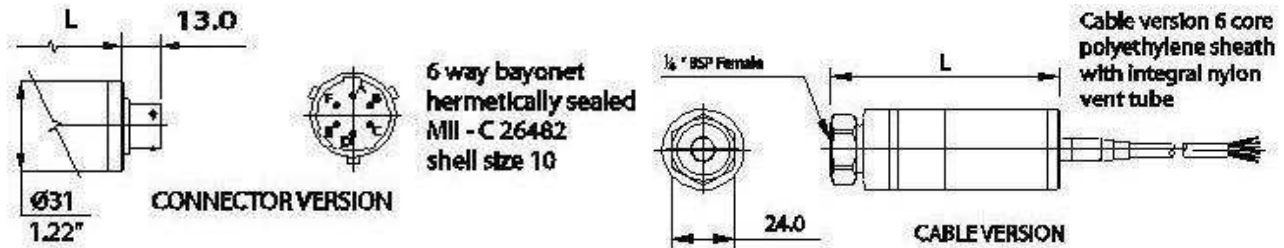

ORDERING INFORMATION

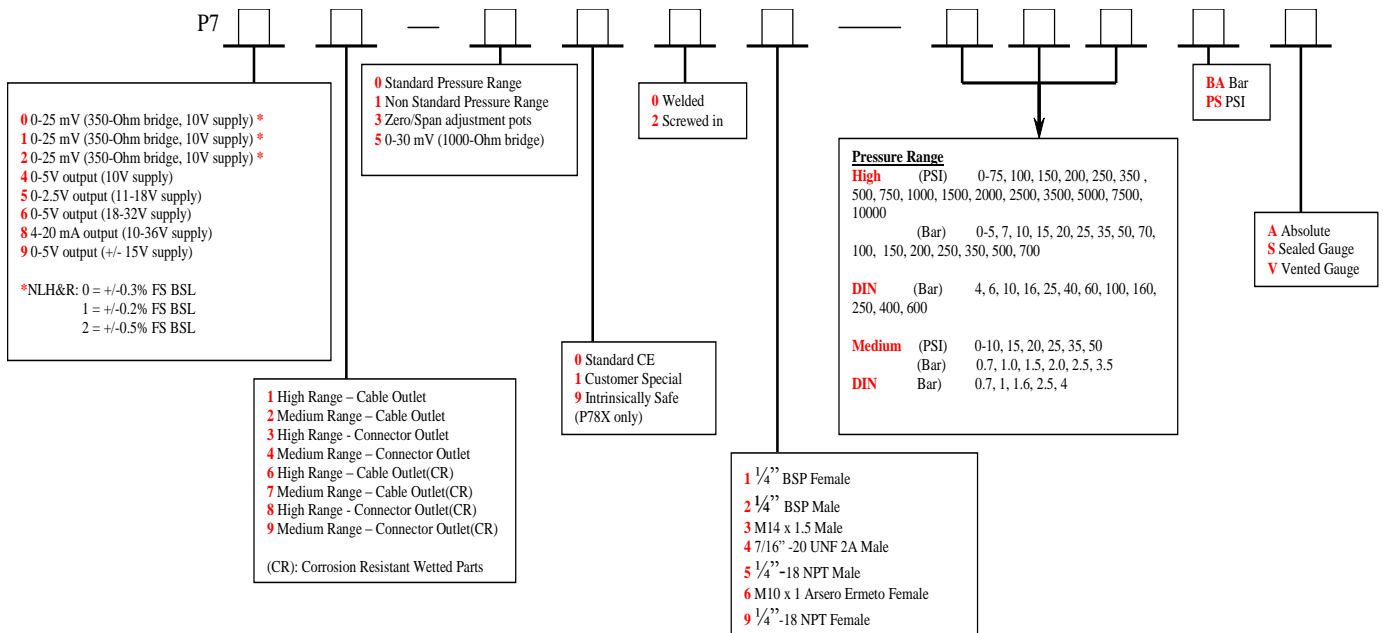

Examples: P722-0005-10PSV = 0 to 25mV output, 0.5% NLH&R, cable outlet, welded 1/4" NPT port, 10 psi vented gauge
P786-0901-700BAA = 4 to 20mA output, cable outlet (corrosion resistant build), Intrinsically Safe, welded 1/4" BSP port, 700 bar absolute

P700

NORTH AMERICA

Measurement Specialties
45738 Northport Loop West
Fremont, CA 94538
Tel: 1-800-767-1888
Fax: 1-510-498-1578
Sales: pfg.cs.amer@meas-spec.com

EUROPE

Measurement Specialties
(Europe), Ltd.
26 Rue des Dames
78340 Les Clayes-sous-Bois, France
Tel: +33 (0) 130 79 33 00
Fax: +33 (0) 134 81 03 59
Sales: pfg.cs.emea@meas-spec.com

ASIA

Measurement Specialties
(China), Ltd.
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057
China
Tel: +86 755 3330 5088
Fax: +86 755 3330 5099
Sales: pfg.cs.asia@meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.