

TruBlue® 575 Baro



- Barometric Pressure Accuracy of $\pm 0.1\%$ FS TEB
- Five year permanent battery
- 8 MB internal memory
- New user-friendly TruWare software for PC or Mobile



DESCRIPTION

The 575 Baro is an absolute non-submersible pressure transducer. This unit provides local atmospheric pressure data that can be used to compensate one or more submerged, non-vented water level transducers. An absolute format measures all pressure applied to it including atmospheric. If submerged, it measures the atmospheric pressure plus pressure exerted by the column of water above the sensor. A level value can be arrived at using two absolute transducers—one submerged and one at ground level—subtracting atmospheric pressure from the submerged transducer measuring water pressure.

The TruBlue 575 Baro is the perfect choice to measure barometric pressure when reliability, accuracy and precision matter.

FEATURES

- Calibration Report included with each instrument
- New fully sealed design
- Two Year Warranty
- Easier set-up and data retrieval
- Displays real-time instrument status and data graphs

APPLICATIONS

- Barometric Pressure Measurement
- Atmospheric Pressure Correction for Non-vented Level Transducers
- Surface Water Monitoring
- Groundwater Monitoring
- Oceanographic Research

TruBlue® 575 Baro

SPECIFICATIONS

SENSORS – LEVEL

Sensor Type	Oil-filled Piezoresistive	
Sensor Material	316 SS or Titanium	
Range (psia)	Low	8
	High	16
Accuracy	0 – 50°C	±0.1% FS TEB
Resolution		0.01% FS or better
Burst		0.005% FS

Accuracy is stated as total error band (TEB). This includes the combined errors due to non-linearity, hysteresis, non-repeatability and thermal effects.

SENSORS – TEMPERATURE

Sensor Type	Embedded NTC Thermistor	
Range (°C)	Low	0
	High	50
Accuracy		±0.2°C
Resolution		0.01°C

PHYSICAL

Diameter	inches	0.75
Length	inches	13.26
Weight	oz.	12

OPERATING CONDITIONS

Pressure (psia)	Low	8
	High	16
Temperature (°C)	Low	0
	High	50

ELECTRICAL


Internal Battery Type	3.6V lithium	
Battery Life	5 years	
On-Board Surge Protection	✓	
External Power	6-16 VDC (1 mA sleep, 15 mA active)	
Communication Interface	RS-485 (half duplex)	

DATA LOGGING

Memory	8 MB	
Data Points	550,000	
Clock Accuracy	2 min/year	
Reading	Linear	1 per 5 seconds
	Linear Average	programmable
	Event	programmable
Fastest Logging Rate	Linear	5 per second
	Linear Average	programmable
	Event	programmable
Methods	Linear	✓
	Linear Average	✓
	Event	✓

TruBlue® 575 Baro

DIMENSIONS

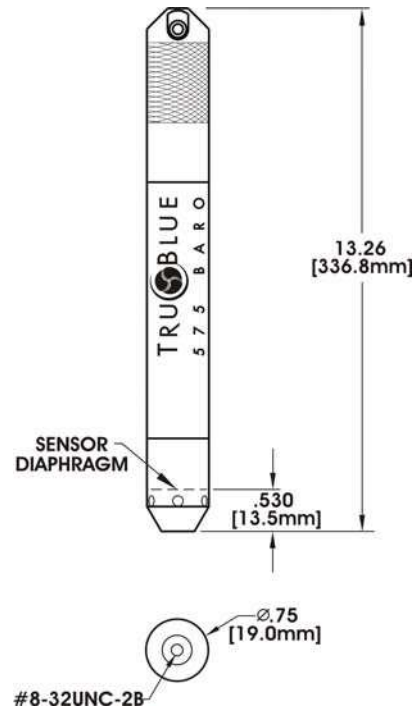

SOFTWARE



Each unit comes with user-friendly software at no charge.

- View, graph, and export test data
- Manage transducers by site
- Use in the field or office

TruBlue® 575 Baro

ORDERING INFORMATION

PART NUMBER	REFERENCE	MATERIAL
575-00100	Absolute	S
575-00110	Absolute	T

NORTH AMERICA

Measurement Specialties
1000 Lucas Way
Hampton, VA 23666
Tel: 1-800-328-3665; 757-766-1500
Fax: 1-757-766-4297
Email: pvg.cs.amer@meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.