

MEAS KPSI 342



- Withstands temperatures to 85°C
- Submersible Level Transducer
- Small Bore, 0.75" Diameter
- $\pm 0.25\%$ FS Total Error Band Accuracy
- ASIC Technology
- Two Year Warranty

DESCRIPTION

The MEAS KPSI 342 is a small bore submersible hydrostatic level transducer that combines sensor competencies with the latest in Application Specific Integrated Circuit (ASIC) technology. Implementation of the ASIC provides unmatched sensor compensation over the entire operating range of the pressure sensor. The Total Error Band specification ($\pm 0.25\%$ FS) eliminates the user having to combine multiple performance specifications to understand the total accuracy of the transducer.

All MEAS KPSI Transducers utilize a highly accurate pressure sensor assembly specifically designed for hostile fluids and gases. The assembly is integrated with supporting electronics in a durable waterproof housing constructed of 316 stainless steel or titanium. The attached electrical cable is custom manufactured and includes Kevlar® strength tensioning members to prevent errors due to cable elongation, and a unique water block feature. Each transducer is shipped with our latest SuperDry™ Vent Filter that prevents moisture from entering the vent tube for at least one year without maintenance, even in the most humid environments.

FEATURES

- High Operating Temperature Range to 85°C
- Custom Polyurethane or ETFE Cable Lengths
- Welded 316SS or Titanium
- Custom Level Ranges up to 692 ft (211m) H₂O
- Analog Output of 4-20 mA
- Optional Lifetime Lightning Protection
- Shipped with Long Life Vent Filter

APPLICATIONS

- Surface Water Monitoring
- Tailrace and Forebay Monitoring
- Groundwater Monitoring
- Oceanographic Research
- Down Hole


MEAS KPSI 342

SPECIFICATIONS

| Parameter | Comment | |
|--|---|--|
| LEVEL RANGES | | |
| Full Scale Level Ranges (intermediate level ranges are available) | 10 thru 692 ft H ₂ O (3 thru 211 m H ₂ O) | Vented Gage Reference |
| | 35 thru 692 ft H ₂ O (10 thru 211 m H ₂ O) | Sealed or Absolute Gage Reference |
| Proof Pressure | 1.5 x FS | |
| Burst Pressure | 2.0 x FS | |
| STATIC PERFORMANCE | | |
| Static Accuracy (combined errors due to nonlinearity, hysteresis, nonrepeatability, and thermal effects over the compensated temperature range) | ±0.25% TEB | Prorated for level ranges < = 23' (7m) H ₂ O when operating > 60°C |
| Resolution | +0.0001% FS | |
| ENVIRONMENTAL | | |
| Wetted Materials | 316 SS or Titanium; POM; polyurethane or FKM | |
| Compensated Temp Range | -20 to 85° C | |
| Operating Temp Range | -20 to 85° C | when attached to polyurethane cable |
| Protection Rating | IP 68, NEMA 6P | |
| ELECTRICAL | | |
| Excitation | 9-30 VDC | mA output |
| Input Current | 20 mA max | |
| Output | 4-20mA | |
| Zero Offset | ±0.12 mA | |
| Output Impedance | See loop diagram for mA output | |
| Insulation Resistance | 100 mega ohm at 50 VDC | |
| Circuit Protection | Polarity, surge/shorted output | |
| CERTIFICATIONS | | |
| | CE compliant | EN 61326-1:2001 and 61326-2-3:2006 |
| PHYSICAL | | |
| Approximate Weight | 0.50 lbs (224 g) transducer | |
| | 0.05 lbs/ft (79 g/m) cable | |
| Cable Jacket Material | Polyurethane (standard) ETFE (optional) | |
| Cable Pull Strength | 200 lbs (90 kg) | |
| Cable Number of Conductors | 4 | |
| Cable Conductor Size | 22 AWG | |
| Cable Seal | Molded Polyurethane | for polyurethane cable |
| | FKM Gland | for ETFE cable |
| LIGHTNING PROTECTION (power supply needs to be limited to 150mA to avoid lock up of the gas tube after a suppression event) | | |
| Life Expectancy | >1,000 Operations | |
| Peak Clamping Voltage | 36 Volts | |
| Response Time | <10 nsecs | |
| Shunts | 20,000 Amperes | |


MEAS KPSI 342

DIMENSIONS

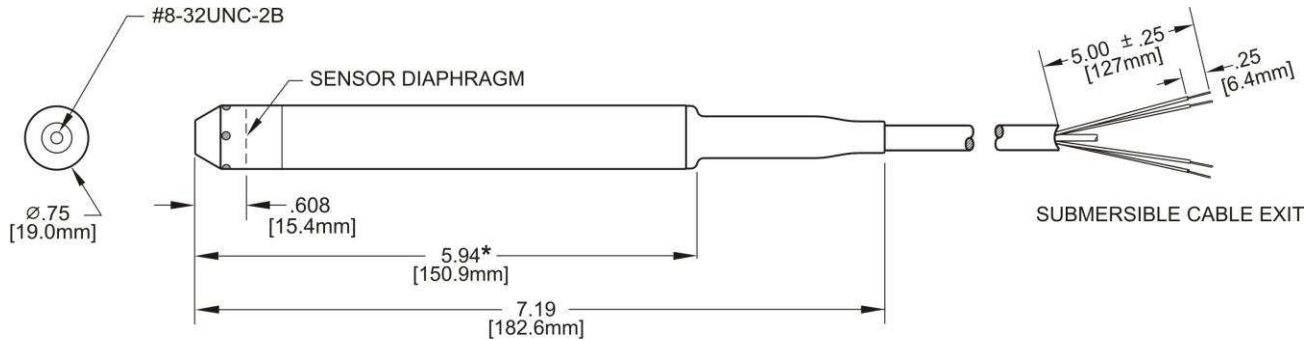

* ADD 5.00" FOR LIGHTNING PROTECTION OPTION

Molded Cable Seal Configuration for Polyurethane Cable

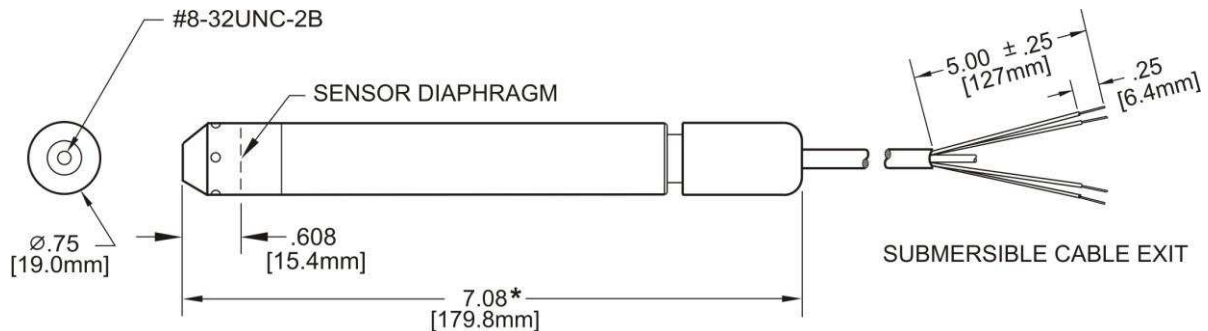


* ADD 5.00" FOR LIGHTNING PROTECTION OPTION

Gland Cable Seal Configuration for ETFE cable

ELECTRICAL TERMINATION / LOOP RESISTANCE / CERTIFICATIONS

| ELECTRICAL TERMINATION | | |
|---|------------|--------------|
| 22AWG CONDUCTORS IN A SHIELDED CABLE WITH VENT TUBE | | |
| 4-20 mA | RED | + EXCITATION |
| | BLACK | - EXCITATION |
| | DRAIN WIRE | SHIELD |

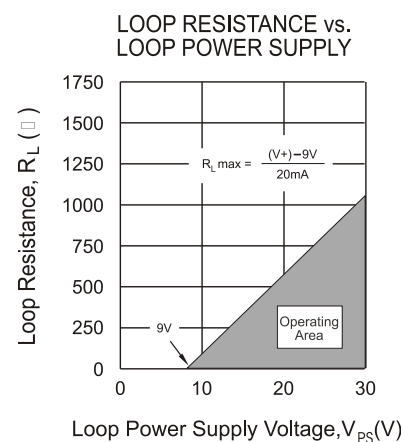

MEAS KPSI 342

ORDERING INFORMATION

| MODEL | | SUBMERSIBLE LEVEL TRANSDUCER | | | | | | | | | | | |
|--|---|------------------------------|---|---|-----------|---|--|--|--|--|--|--|--|
| 3 | 4 | 2 | | | | | | | | | | | |
| ↓ | ↓ | ↓ | | | | | | | | | | | |
| MATERIAL | | | | | | | | | | | | | |
| S Stainless Steel | | | | | | | | | | | | | |
| T Titanium | | | | | | | | | | | | | |
| ↓ | | | | | | | | | | | | | |
| REFERENCE FORMAT | | | | | | | | | | | | | |
| 1 Vented gage | | | | | | | | | | | | | |
| 3 Sealed gage | | | | | | | | | | | | | |
| 4 Absolute | | | | | | | | | | | | | |
| ↓ | | | | | | | | | | | | | |
| OUTPUT | | | | | | | | | | | | | |
| 4 4-20 mA | | | | | | | | | | | | | |
| ↓ | | | | | | | | | | | | | |
| PRESSURE CONNECTION | | | | | | | | | | | | | |
| B Ported nose cap | | | | | | | | | | | | | |
| ↓ | | | | | | | | | | | | | |
| ELECTRICAL CONNECTION | | | | | | | | | | | | | |
| 0 Molded cable seal | | | | | | | | | | | | | |
| A Gland cable seal | | | | | | | | | | | | | |
| ↓ | | | | | | | | | | | | | |
| LIGHTNING PROTECTION | | | | | | | | | | | | | |
| A None | | | | | | | | | | | | | |
| B Full Lightning Protection | | | | | | | | | | | | | |
| ↓ | | | | | | | | | | | | | |
| LEVEL RANGE (at MAX output) ¹ | | | | | | | | | | | | | |
| # | # | # | . | # | # | # | | | | | | | |
| ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | | | | | | | |
| | | | | | | | LEVEL RANGE (at MIN output) ¹ | | | | | | |
| # | # | # | . | # | # | # | | | | | | | |
| ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | | | | | | | |
| MOISTURE PROTECTION | | | | | | | | | | | | | |
| A None (sealed/absolute only) | | | | | | | | | | | | | |
| B Vent Filter | | | | | | | | | | | | | |
| ↓ | | | | | | | | | | | | | |
| CABLE TYPE | | | | | | | | | | | | | |
| 1 Polyurethane | | | | | | | | | | | | | |
| 2 ETFE | | | | | | | | | | | | | |
| ↓ | | | | | | | | | | | | | |
| CABLE LENGTH | | | | | | | | | | | | | |
| x | x | x | x | x | (in feet) | | | | | | | | |
| ↓ | ↓ | ↓ | ↓ | ↓ | | | | | | | | | |
| LABEL ² | | | | | | | | | | | | | |
| A psi | | | | | | | | | | | | | |
| B ft H ₂ O | | | | | | | | | | | | | |
| C m H ₂ O | | | | | | | | | | | | | |
| ↓ | | | | | | | | | | | | | |
| 3 | 4 | 2 | | | | | | | | | | | |

Notes:

¹ The part number requires two level range limits, corresponding to the maximum and minimum analog outputs of the transducer, to be specified in **pounds per square inch (psi)** to three decimal places. The lower level range is typically 000.000 unless otherwise required. For reverse output requirements, enter the lower level range for the maximum output signal and the upper range for the minimum output. Use the following conversion factors:

ft H₂O / 2.3073 = psi
m H₂O / 0.703265 = psi

Examples: 10 ft H₂O / 2.3073 = 4.334 psi
10m H₂O / 0.703265 = 14.219 psi

(enter 004.334 in the part number)
(enter 014.219 in the part number)

For sealed gage reference add local atmosphere when converting to psi. Contact MEAS for assistance.

Example: 10 ft H₂O / 2.3073 + 14.7 = 19.034 psi

(enter 019.034 in the part number)

² Units of measure on standard MEAS label. Contact Measurement Specialties if private labeling is required.

NORTH AMERICA

Measurement Specialties, Inc.
1000 Lucas Way
Hampton, VA 23666
USA
Tel: 1-757-766-1500
Fax: 1-757-766-4297
Toll Free: 1-800-745-8008
Sales: WL.sales@meas-spec.com

EUROPE

Measurement Specialties
(Europe), Ltd.
26 Rue des Dames
78340 Les Clayes-sous-Bois, France
Tel: +33 (0) 130 79 33 00
Fax: +33 (0) 134 81 03 59
Sales: pfq.cs.emea@meas-spec.com

ASIA

Measurement Specialties
(China), Ltd.
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057
China
Tel: +86 755 3330 5088
Fax: +86 755 3330 5099
Sales: pfq.cs.asia@meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.