

MEAS KPSI 745 Level Transducer

- Non-Fouling Submersible Level Transducer
- Less than 4" OD
- $\pm 0.25\%$ FSO Static Accuracy
- 2.50" PTFE Coated Elastomeric Diaphragm
- Protective Cage Option
- Custom Build in Two Days
- Two Year Warranty



The **MEAS KPSI 745 Submersible Hydrostatic Level Transducer**

is specifically designed to meet the rigorous environments encountered in a slurry or highly viscous application and can be installed in a 4" pipe. It provides precision depth measurement under most hostile conditions.

FEATURES

- 3.5" OD allows for installation in a 4" pipe
- Custom Polyurethane or ETFE Cable Lengths
- Level Ranges up to 115 ft (35m) H₂O
- Integral Diaphragm Protector
- Optional Lifetime Lightning Protection


APPLICATIONS

- Lift Station Monitoring
- Pump Control
- Slurry Tank Liquid Level
- Wastewater


MEAS KPSI 745 Level Transducer

electrical termination / loop resistance

ELECTRICAL TERMINATION		
22AWG CONDUCTORS IN A SHIELDED CABLE WITH VENT TUBE		
4-20 mA	RED	+ EXCITATION
	BLACK	- EXCITATION
VDC	RED	+ EXCITATION
	BLACK	- EXCITATION
	WHITE	+ SIGNAL
ALL	DRAIN WIRE	SHIELD

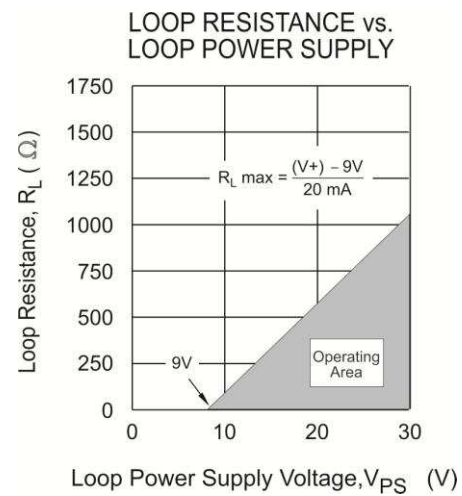

dimensions

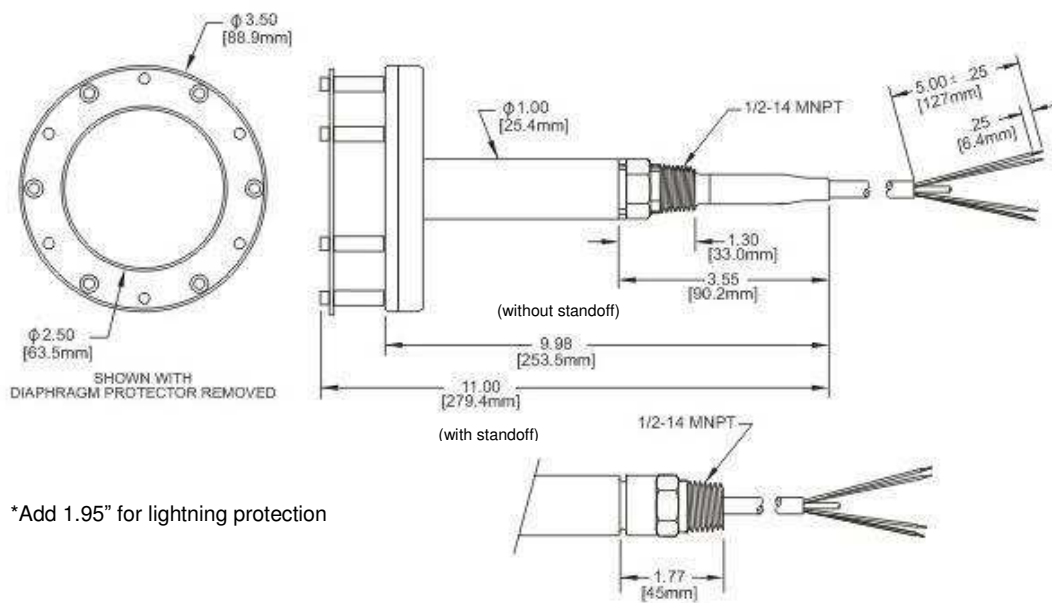

Molded Cable Seal Configuration for Polyurethane Cable

MEAS KPSI 745 Level Transducer

performance specifications

Parameter	Comment	
LEVEL RANGES		
Full Scale Level Ranges (intermediate level ranges are available)	10 thru 115 ft H ₂ O (3 thru 35 m H ₂ O)	Vented Gage Reference
Proof Pressure	1.5 x FS	
Burst Pressure	2.0 x FS	
STATIC PERFORMANCE		
Static Accuracy (combined effects of non-linearity, hysteresis and repeatability, best fit straight line method)	±0.25% FSO	BFSL method
Resolution	+0.0001% FS	
ENVIRONMENTAL		
Wetted Materials	316 SS; POM; polyurethane, PTFE or FKM	
Compensated Temp Range	0 to 50°C	
Thermal Error (maximum allowable deviation from the Best Fit Straight Line due to a change in temperature)	±0.10% FSO/°C	worst case for level ranges > 23' (7m) H ₂ O prorated for level ranges <=23' (7m) H ₂ O
Operating Temp Range	-20 to 60 °C	when attached to polyurethane cable
Protection Rating	IP 68, NEMA 6P	
ELECTRICAL		
Excitation	9-28V – VDC output	0-5V, 0-2.5V, 0-4V
	9-28V – mA output	4-20
	15-28V – VDC output	0-10V
	10-28V – VDC output	1.5-7.5V
Input Current	20 mA max	for mA output
	3.5 mA max	for VDC output
Output	4-20mA, 0-5 VDC, 0-2.5VDC, 0-4VDC, 0-10VDC, 1.5-7.5VDC	for ranges < 5 ft (1.5m) H ₂ O, only 4-20mA output is available
Zero Offset	±0.25 mA for mA output	
	< 0.25 VDC for VDC output	
Output Impedance	See loop diagram for mA output 20 ohm for VDC output	
Insulation Resistance	100 mega ohm at 50 VDC	
Circuit Protection	Polarity, surge/shorted output	
CERTIFICATIONS		
	CE compliant	EN 61326-1:2001 and 61326-2-3:2006
	UL, CUL and FM	Class I, II, III, Div 1, Groups A,B,C,D,E,F&G
	WEEE/RoHS	Waste from Electrical and Electronic Equipment (WEEE) & Restrictions on use of Hazardous Substances (RoHS)
PHYSICAL		
Approximate Weight	2.25 lbs. (1020.58 g) transducer	
	0.05 lbs/ft (79 g/m) cable	
Cable Jacket Material	Polyurethane (standard) ETFE (optional)	
Cable Pull Strength	200 lbs (90 kg)	
Cable Number of Conductors	4	
Cable Conductor Size	22 AWG	
Cable Seal	Molded Polyurethane FKM Gland	for polyurethane cable for ETFE cable
LIGHTNING PROTECTION (power supply needs to be limited to 150mA to avoid lock up of the gas tube after a suppression event)		
Life Expectancy	>1,000 Operations	
Peak Clamping Voltage	36 Volts	
Response Time	<10 nsecs	
Shunts	20,000 Amperes	

MEAS KPSI 745 Level Transducer

ordering information

MODEL		SUBMERSIBLE LEVEL TRANSDUCER	
7	4 5	±0.25% FSO Static Accuracy	
↓	↓ ↓		
MATERIAL			
S	Stainless Steel		
↓			
REFERENCE FORMAT			
1	Vented gage		
↓			
OUTPUT			
4	4-20mA		
3	0-5 VDC		
F	0-2.5 V		
G	0-4 V		
H	0-10 V		
J	1.5-7.5V		
6	4-20mA temperature measurement option		
↓			
PRESSURE CONNECTION			
D	Diaphragm protector		
X	Without diaphragm protector		
↓			
ELECTRICAL CONNECTION			
4	1/2" - 14 NPT male conduit fitting with molded cable seal		
B	1/2" - 14 NPT male conduit fitting with gland cable seal		
↓			
LIGHTNING PROTECTION			
A	None		
B	Full Lightning Protection		
↓			
LEVEL RANGE (at MAX output) ¹			
#	#	#	#
↓	↓	↓	↓
LEVEL RANGE (at MIN output) ¹			
#	#	#	#
↓	↓	↓	↓
MOISTURE PROTECTION			
B	Vent Filter		
C	Aneroid Bellows		
↓			
CABLE TYPE			
1	Polyurethane		
2	ETFE		
↓			
CABLE LENGTH			
#	#	#	#
↓	↓	↓	↓
LABEL ²			
A	psi		
B	ft H ₂ O		
C	m H ₂ O		
↓			

- 1 The part number requires two level range limits, corresponding to the maximum and minimum analog outputs of the transducer, to be specified in **pounds per square inch (psi)** to three decimal places. The lower level range is typically 000.000 unless otherwise required. For reverse output requirements, enter the lower level range for the maximum output signal and the upper range for the minimum output. Use the following conversion factors:

ft H₂O / 2.3073 = psi
m H₂O / 0.703265 = psi

Examples: 10 ft H₂O / 2.3073 = 4.334 psi
10m H₂O / 0.703265 = 14.219 psi

(enter 004.334 in the part number)
(enter 014.219 in the part number)

For sealed gage reference add local atmosphere when converting to psi. Contact MEAS for assistance.
Example: 10 ft H₂O / 2.3073 +14.7 = 19.034 psi

(enter 019.034 in the part number)

- 2 Units of measure on standard MEAS label. Contact Measurement Specialties if private labeling is required.

NORTH AMERICA

Measurement Specialties, Inc.
1000 Lucas Way
Hampton, VA 23666
USA
Tel: 1-757-766-1500
Fax: 1-757-766-4297
Toll Free: 1-800-745-8008
Sales: WL.sales@meas-spec.com

EUROPE

Measurement Specialties
(Europe), Ltd.
26 Rue des Dames
78340 Les Clayes-sous-Bois, France
Tel: +33 (0) 130 79 33 00
Fax: +33 (0) 134 81 03 59
Sales: pfg.cs.emea@meas-spec.com

ASIA

Measurement Specialties
(China), Ltd.
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057
China
Tel: +86 755 3330 5088
Fax: +86 755 3330 5099
Sales: pfg.cs.asia@meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.