

MEAS KPSI 351

- SDI-12 Small Bore Submersible Level Transducer
- ± 0.01 ft H₂O, reading ≤ 10 ft (3m) H₂O
- $\pm 0.10\%$ reading, > 10 ft (3m) H₂O
- Optional Lifetime Lightning Protection
- Two year warranty



The MEAS KPSI 351 submersible hydrostatic level transducer is specifically designed for small bore applications and to meet the rigorous environments encountered in ground water level measurements. Incorporating a highly stable media-isolated sensor, the MEAS KPSI 351 features SDI-12 serial-digital interface. SDI-12 is a standard for interfacing data recorders with microprocessor-based sensors, especially in the environmental monitoring field. The MEAS KPSI 351 is intended for applications with requirements that include battery-powered operation with minimal current drain, low system cost, and use of a single recorder with multiple sensors “daisy-chained” on one cable. It will accommodate cable lengths between sensors and recorder up to 200 feet. New removable cable option allows easy substitution of transducers and cables.

APPLICATIONS


- Groundwater Monitoring
- Down Hole
- Surface Water Monitoring
- Tailrace and Forebay Monitoring
- Oceanographic Research

FEATURES


- Removable cable option
- Custom Polyurethane or ETFE Cable Lengths
- Welded 316SS or Titanium
- Custom Level Ranges up to 50 ft (15m) H₂O
- Shipped with Long-Life Vent Filter

MEAS KPSI 351



dimensions

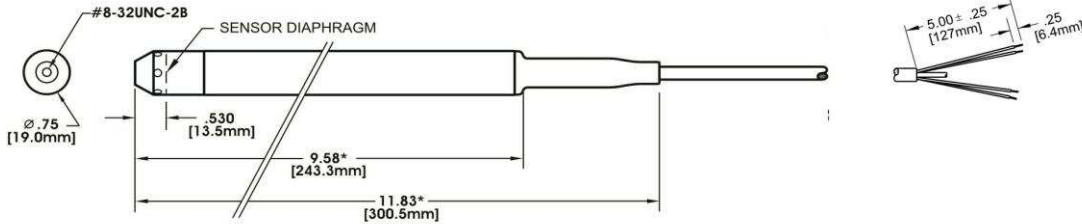


* Add 3.80 for lightning protection.

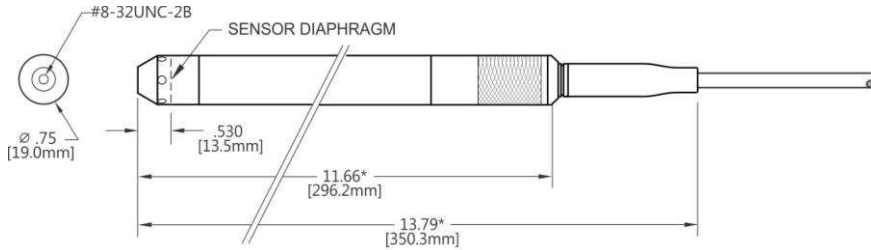

Molded Cable Seal Configuration for Polyurethane cable

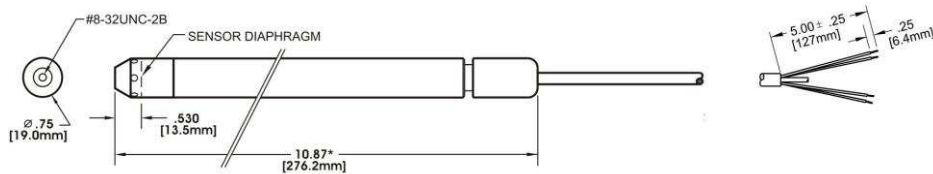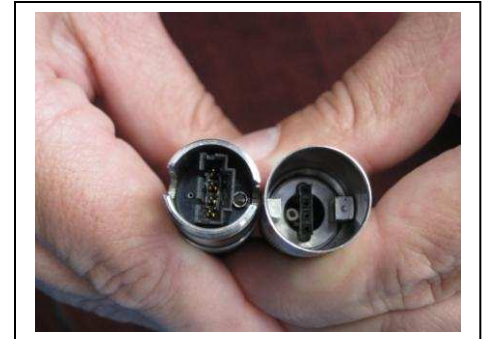

* Add 3.80 for lightning protection.

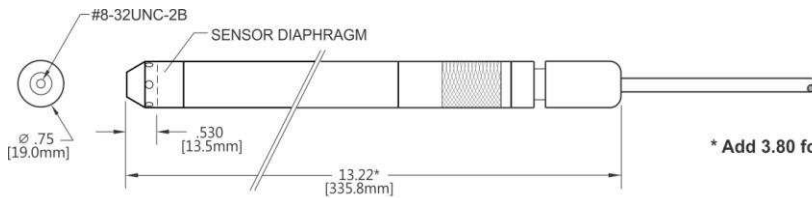

Gland Seal Configuration for ETFE cable

* Add 3.80 for lightning protection.



electrical termination and removable cable options

| ELECTRICAL TERMINATION | | |
|---|------------|----------|
| 22AWG CONDUCTORS IN A SHIELDED CABLE WITH VENT TUBE | | |
| SDI-12 | RED | + SUPPLY |
| | BLACK | - SUPPLY |
| | WHITE | SIGNAL |
| RS-485 | RED | + SUPPLY |
| | BLACK | - SUPPLY |
| | WHITE | RS485-A |
| | GREEN | RS485-B |
| ALL | DRAIN WIRE | SHIELD |

| MODEL | | REMOVABLE CABLE | | | | | | | | | | |
|-------|---|-----------------|----------|--------------------------|---|--|--|--|--|-----------|--|--|
| 8 | 5 | 9 | | | | | | | | | | |
| ↓ | ↓ | ↓ | MATERIAL | | | | | | | | | |
| | | | S | Stainless Steel | | | | | | | | |
| | | | T | Titanium | | | | | | | | |
| | | | ↓ | OUTPUT | | | | | | | | |
| | | | C | SDI-12 | | | | | | | | |
| | | | D | RS 485 w/SDI-12 protocol | | | | | | | | |
| | | | ↓ | ELECTRICAL CONNECTION | | | | | | | | |
| | | | 0 | Molded cable seal | | | | | | | | |
| | | | A | Gland cable seal | | | | | | | | |
| | | | R | Removable cable | | | | | | | | |
| | | | ↓ | CABLE TYPE | | | | | | | | |
| | | | 1 | Polyurethane | | | | | | | | |
| | | | 2 | ETFE | | | | | | | | |
| | | | ↓ | CABLE LENGTH | | | | | | | | |
| | | | # | # | # | | | | | (in feet) | | |
| 8 | 5 | 9 | | | | | | | | | | |

performance specifications

| Parameter | Comment | |
|--|---|--|
| LEVEL RANGES | | |
| Full Scale Level Ranges (intermediate level ranges are available) | 10 thru 50 ft (3 thru 15 m) H ₂ O | Vented Gage Reference |
| Proof Pressure | 1.5 x FS | |
| Burst Pressure | 2.0 x FS | |
| STATIC PERFORMANCE (Combined Errors Due to Nonlinearity, Hysteresis, Nonrepeatability, and Thermal Effects over the Compensated Temperature Range) | | |
| Level | ±0.01 ft H ₂ O ±0.10% reading | for reading ≤ 10 ft (3m) H ₂ O for reading > 10 ft (3m) H ₂ O |
| Temperature | +0.5°C | |
| Excitation | ±0.5 VDC | 8 to 28 volts |
| Resolution | +0.0001% FS | |
| MEASUREMENT RESOLUTION | | |
| Level | ±0.0001%FS | |
| Temperature | ±0.001°C | |
| Excitation | ±0.1 VDC | |
| ENVIRONMENTAL | | |
| Wetted Materials | 316 SS or Titanium; POM; polyurethane or FKM | |
| Compensated Temp Range | 0 to 50°C | |
| Operating Temp Range | -20 to 60 °C | when attached to polyurethane cable |
| Protection Rating | IP 68, NEMA 6P | |
| ELECTRICAL | | |
| Excitation | 6-28V – VDC output | |
| Input Current | 8 mA max 1.0 mA | average current during data acquisition quiescent |
| Interface | SDI-12, version 1.3 RS-485 | SDI-12 protocol |
| CERTIFICATIONS | | |
| | CE compliant | EN 61326-1:2001 and 61326-2-3:2006 |
| PHYSICAL | | |
| Approximate Weight | 0.75 lbs (340 g) transducer 0.05 lbs/ft (79 g/m) cable | |
| Cable Jacket Material | Polyurethane (standard) ETFE (optional) | |
| Cable Pull Strength | 200 lbs (90 kg) | |
| Cable Number of Conductors | 4 | |
| Cable Conductor Size | 22 AWG | |
| Cable Seal | Molded Polyurethane FKM Gland | for polyurethane cable for ETFE cable |
| LIGHTNING PROTECTION (power supply needs to be limited to 150mA to avoid lock up of the gas tube after a suppression event) | | |
| Life Expectancy | >1,000 Operations | |
| Peak Clamping Voltage | 36 Volts | |
| Response Time | <10 nsecs | |
| Shunts | 20,000 Amperes | |

ordering info

| MODEL | | SUBMERSIBLE LEVEL TRANSDUCER | |
|--|-----|------------------------------------|-------------|
| 3 | 5 1 | ±0.01 ft H ₂ O Accuracy | |
| ↓ | ↓ | ↓ | |
| MATERIAL | | | |
| S Stainless Steel | | | |
| T Titanium | | | |
| ↓ | ↓ | | |
| REFERENCE FORMAT | | | |
| 1 Vented gage | | | |
| ↓ | ↓ | | |
| OUTPUT | | | |
| C SDI-12 | | | |
| D RS 485 w/SDI-12 protocol | | | |
| ↓ | ↓ | | |
| PRESSURE CONNECTION | | | |
| B Ported nose cap | | | |
| ↓ | ↓ | | |
| ELECTRICAL CONNECTION | | | |
| 0 Molded cable seal | | | |
| A Gland cable seal | | | |
| R Removable cable | | | |
| ↓ | ↓ | | |
| LIGHTNING PROTECTION | | | |
| A None | | | |
| B Full Lightning Protection | | | |
| ↓ | ↓ | | |
| LEVEL RANGE (at MAX output)¹ | | | |
| # | # | # | # |
| ↓ | ↓ | ↓ | ↓ |
| LEVEL RANGE (at MIN output)¹ | | | |
| # | # | # | # |
| ↓ | ↓ | ↓ | ↓ |
| MOISTURE PROTECTION | | | |
| A None | | | |
| B Vent Filter | | | |
| ↓ | ↓ | | |
| CABLE TYPE | | | |
| 0 None | | | |
| 1 Polyurethane | | | |
| 2 ETFE | | | |
| ↓ | ↓ | | |
| CABLE LENGTH | | | |
| # | # | # | # (in feet) |
| ↓ | ↓ | ↓ | ↓ |
| LABEL² | | | |
| A psi | | | |
| B ft H ₂ O | | | |
| C m H ₂ O | | | |
| ↓ | ↓ | | |
| 3 | 5 | 1 | 1 B |

1 The part number requires two level range limits, corresponding to the maximum and minimum analog outputs of the transducer, to be specified in **pounds per square inch (psi)** to three decimal places. The lower level range is typically 000.000 unless otherwise required. For reverse output requirements, enter the lower level range for the maximum output signal and the upper range for the minimum output. Use the following conversion factors:

ft H₂O / 2.3073 = psi Examples: 10 ft H₂O / 2.3073 = 4.334 psi (enter 004.334 in the part number)
m H₂O / 0.703265 = psi 10 m H₂O / 0.703265 = 14.219 psi (enter 014.219 in the part number)

For sealed gage reference add local atmosphere when converting to psi. Contact MEAS for assistance.

Example: 10 ft H₂O / 2.3073 +14.7 = 19.034 psi (enter 019.034 in the part number)

2 Units of measure on standard MEAS label. Contact Measurement Specialties if private labeling is required.

NORTH AMERICA

Measurement Specialties, Inc.
1000 Lucas Way
Hampton, VA 23666
USA
Tel: 1-757-766-1500
Fax: 1-757-766-4297
Toll Free: 1-800-745-8008
Sales: WL.sales@meas-spec.com

EUROPE

Measurement Specialties
(Europe), Ltd.
26 Rue des Dames
78340 Les Clayes-sous-Bois, France
Tel: +33 (0) 130 79 33 00
Fax: +33 (0) 134 81 03 59
Sales: pfg.cs.emea@meas-spec.com

ASIA

Measurement Specialties (China), Ltd.
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057
China
Tel: +86 755 3330 5088
Fax: +86 755 3330 5099
Sales: pfg.cs.asia@meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.