



120x120x32mm

- Airflow: 24.5~48.9 CFM
- Static Pressure: 8.7~54.5 mm-H₂O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #22 AWG
- Weight: 258.5 g

DC AXIAL FAN

DC BLOWER

XTREME SERIES

AC AXIAL FAN

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	Hour		dB(A)
BW12032012BL	2B	12	7~13.2	1800	24.5	8.7	230	2.76	80000	5	46.0
BW12032012BM	2B	12	7~13.2	2100	28.9	21.1	350	4.20	80000	4	53.2
BW12032012BH	2B	12	7~13.2	2600	36.0	28.0	730	8.76	75000	3	56.6
BW12032012BS	2B	12	7~13.2	2900	38.2	31.5	1100	13.2	65000	2	60.2
BW12032012BU	2B	12	7~13.2	3500	48.9	54.5	1750	21.0	65000	1	64.8

Buy Now

2B: 2-ball bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S


Function Available

1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

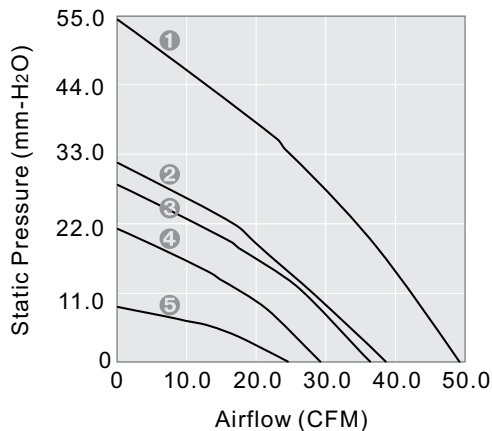

OUTLINE DIMENSIONS

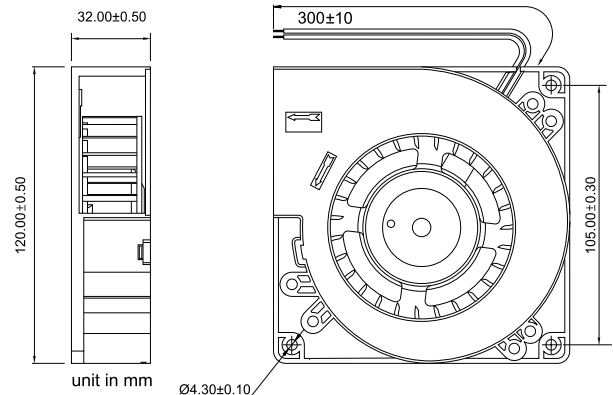

Please refer to *Model Numbering System* for bearing, function and speed level indication. Specifications are subject to changes without notice. Please refer to the formally issued product specification via contacting Y.S. TECH sales department. Visit Y.S. TECH web site at <http://www.ystechusa.com/> for updated information. Customized Specifications are designed accordingly.