



92x92x25.5mm

- Airflow: 17.3~32.0 CFM
- Static Pressure: 1.39~5.70 mm-H₂O
- Blade:
Plastic Material UL 94V-0 P.B.T.
- Frame: Die-Cast Aluminum
- Weight: 260 g

Model No.	Bearing	Rated Voltage	Freq	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VAC	Hz	RPM	CFM	mm-H ₂ O	A	W	Hour		dB(A)
KT09225115S H	S	115	50/60	2500/3000	26/32	3.80/5.70	0.18/0.16	15.0/13.0	20000	1/1	31.7/39.1
KW09225115S H	S		50/60	2500/3000	26/32	3.80/5.70	0.18/0.16	15.0/13.0	20000	1/1	31.7/39.1
KT09225115B L	2B		50/60	1600/1800	17.3/18.3	1.39/1.42	0.07/0.06	7.0/6.0	60000	3/3	26.5/27.0
KW09225115B L	2B		50/60	1600/1800	17.3/18.3	1.39/1.42	0.07/0.06	7.0/6.0	60000	3/3	26.5/27.0
KT09225115BM	2B		50/60	2100/2300	22/25	2.50/2.90	0.09/0.08	10.0/9.0	60000	2/2	28.6/32.0
KW09225115BM	2B		50/60	2100/2300	22/25	2.50/2.90	0.09/0.08	10.0/9.0	60000	2/2	28.6/32.0
KT09225115B H	2B		50/60	2500/3000	26/32	3.80/5.70	0.18/0.16	15.0/13.0	60000	1/1	31.7/39.1
KW09225115B H	2B		50/60	2500/3000	26/32	3.80/5.70	0.18/0.16	15.0/13.0	60000	1/1	31.7/39.1
KT09225220S H	S		50/60	2500/3000	26/32	3.80/5.70	0.08/0.07	15.0/13.0	20000	1/1	31.7/39.1
KW09225220S H	S		50/60	2500/3000	26/32	3.80/5.70	0.08/0.07	15.0/13.0	20000	1/1	31.7/39.1
KT09225220B L	2B	230	50/60	1600/1800	17.3/18.3	1.39/1.42	0.05/0.04	7.0/6.0	60000	3/3	26.5/27.0
KW09225220B L	2B		50/60	1600/1800	17.3/18.3	1.39/1.42	0.05/0.04	7.0/6.0	60000	3/3	26.5/27.0
KT09225220BM	2B		50/60	2100/2300	22/25	2.50/2.90	0.09/0.08	10.0/9.0	60000	2/2	28.6/32.0
KW09225220BM	2B		50/60	2100/2300	22/25	2.50/2.90	0.09/0.08	10.0/9.0	60000	2/2	28.6/32.0
KT09225220B H	2B		50/60	2500/3000	26/32	3.80/5.70	0.08/0.07	15.0/13.0	60000	1/1	31.7/39.1
KW09225220B H	2B		50/60	2500/3000	26/32	3.80/5.70	0.08/0.07	15.0/13.0	60000	1/1	31.7/39.1

2B: 2-ball bearing S: sleeve bearing

Voltage Available


115 230

Bearing System Available


2B S

Buy Now

PERFORMANCE P-Q CURVE

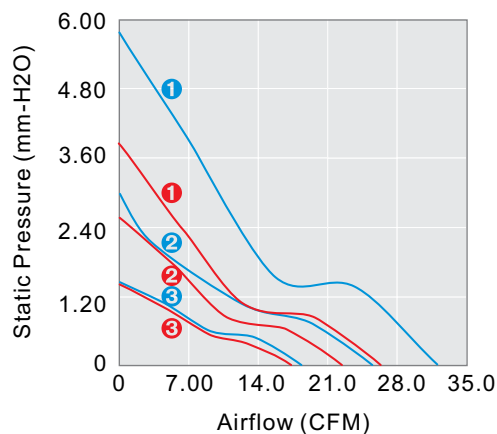

OUTLINE DIMENSIONS

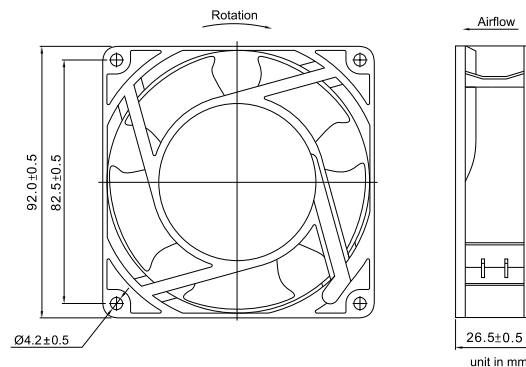

Please refer to *Model Numbering System* for bearing, function and speed level indication.

Specifications are subject to changes without notice. Please refer to the formally issued product specification via contacting Y.S. TECH sales department. Visit Y.S. TECH web site at <http://www.ystechusa.com/> for updated information. Customized Specifications are designed accordingly.