



120x120x25.5mm

- Airflow: 43.2~67.27 CFM
- Static Pressure: 1.5~6.2 mm-H2O
- Blade: Plastic Material UL 94V-0 P.B.T.
- Frame: Die-Cast Aluminum
- Weight: 390 g

DC AXIAL FAN

DC BLOWER

XTREME SERIES

AC AXIAL FAN

Model No.	Bearing	Rated Voltage	Freq	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
	VAC	Hz	RPM	CFM	mm-H ₂ O	A	W	Hour			
KT12025115S H	S	50/60	2400/2900	57.5/67.3	5.30/6.20	0.25/0.20	17.0/15.0	20000	1/1	44.5/48.2	
KW12025115S H	S	50/60	2400/2900	57.5/67.3	5.30/6.20	0.25/0.20	17.0/15.0	20000	1/1	44.5/48.2	
KT12025115B L	2B	50/60	1800/1600	47.1/43.2	2.30/1.50	0.06/0.05	8.0/6.0	60000	3/3	36.7/35.0	
KW12025115B L	2B	50/60	1800/1600	47.1/43.2	2.30/1.50	0.06/0.05	8.0/6.0	60000	3/3	36.7/35.0	
KT12025115BM	2B	50/60	2200/2300	53.8/57.8	3.99/3.77	0.09/0.08	12.0/10.0	60000	2/2	43.0/45.0	
KW12025115BM	2B	50/60	2200/2300	53.8/57.8	3.99/3.77	0.09/0.08	12.0/10.0	60000	2/2	43.0/45.0	
KT12025115B H	2B	50/60	2400/2900	57.5/67.3	5.30/6.20	0.25/0.20	17.0/15.0	20000	1/1	44.5/48.2	
KW12025115B H	2B	50/60	2400/2900	57.5/67.3	5.30/6.20	0.25/0.20	17.0/15.0	20000	1/1	44.5/48.2	
KT12025220S H	S	50/60	2400/2900	57.5/67.3	5.30/6.20	0.09/0.07	17.0/15.0	20000	1/1	44.5/48.2	
KW12025220S H	S	50/60	2400/2900	57.5/67.3	5.30/6.20	0.09/0.07	17.0/15.0	20000	1/1	44.5/48.2	
KT12025220B L	2B	50/60	1800/1600	47.1/43.2	2.30/1.50	0.05/0.04	8.0/6.0	60000	3/3	36.7/35.0	
KW12025220B L	2B	50/60	1800/1600	47.1/43.2	2.30/1.50	0.05/0.04	8.0/6.0	60000	3/3	36.7/35.0	
KT12025220BM	2B	50/60	2200/2300	53.8/57.8	3.99/3.77	0.06/0.05	12.0/10.0	60000	2/2	43.0/45.0	
KW12025220BM	2B	50/60	2200/2300	53.8/57.8	3.99/3.77	0.06/0.05	12.0/10.0	60000	2/2	43.0/45.0	
KT12025220B H	2B	50/60	2400/2900	57.5/67.3	5.30/6.20	0.09/0.07	17.0/15.0	20000	1/1	44.5/48.2	
KW12025220B H	2B	50/60	2400/2900	57.5/67.3	5.30/6.20	0.09/0.07	17.0/15.0	20000	1/1	44.5/48.2	


2B: 2-ball bearing S: sleeve bearing

Voltage Available
115 230


Bearing System Available
2B S

Buy Now

PERFORMANCE P-Q CURVE

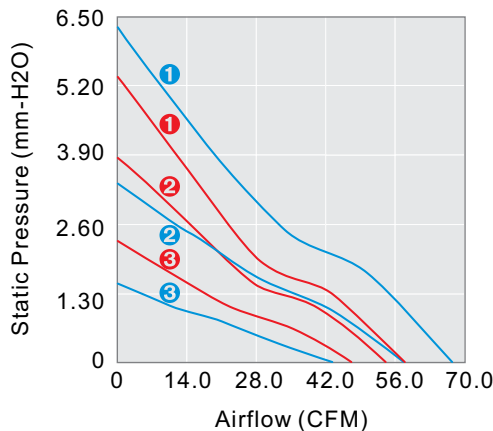

OUTLINE DIMENSIONS

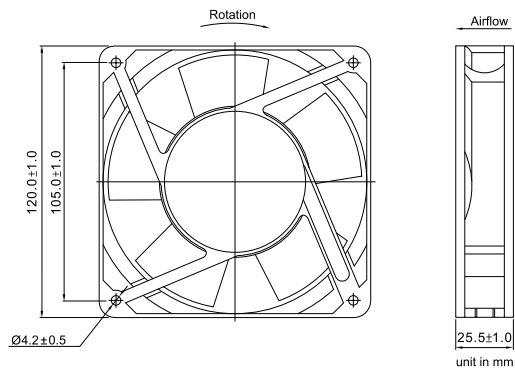

Please refer to *Model Numbering System* for bearing, function and speed level indication. Specifications are subject to changes without notice. Please refer to the formally issued product specification via contacting Y.S. TECH sales department. Visit Y.S. TECH web site at <http://www.ystechusa.com/> for updated information. Customized Specifications are designed accordingly.