



120x120x38mm

- Airflow: 115.5~135.0 CFM
- Static Pressure: 9.15~13.2 mm-H₂O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #22 AWG
- Weight: 220 g

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	Hour		dB(A)
NYW12038012BM	2B	12	7~13.2	3500	115.0	9.1	560	6.72	80000	3	48.0
NYW12038012BH	2B		7~13.2	3800	125.8	9.8	680	8.16	75000	2	49.5
NYW12038012BS	2B		7~13.2	3900	129.8	11.0	850	10.2	65000	1	52.0
NYW12038024BM	2B	24	12~26.4	3500	115.0	9.1	380	9.12	80000	3	48.0
NYW12038024BH	2B		12~26.4	3800	125.8	9.8	420	10.08	75000	2	49.5
NYW12038024BS	2B		12~26.4	4100	135.0	13.2	470	11.28	65000	1	53.0
NYW12038048BM	2B	48	24~56.0	3500	115.0	9.1	130	6.24	80000	3	48.0
NYW12038048BH	2B		24~56.0	3800	125.8	9.8	160	7.68	75000	2	49.5
NYW12038048BS	2B		24~56.0	4100	135.0	13.2	230	11.04	65000	1	53.0

[Buy Now](#)

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S

Function Available

- 1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

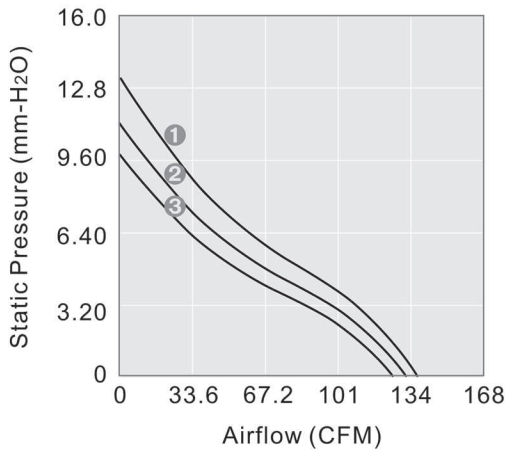

OUTLINE DIMENSIONS

