


# AC

## UF15KC series

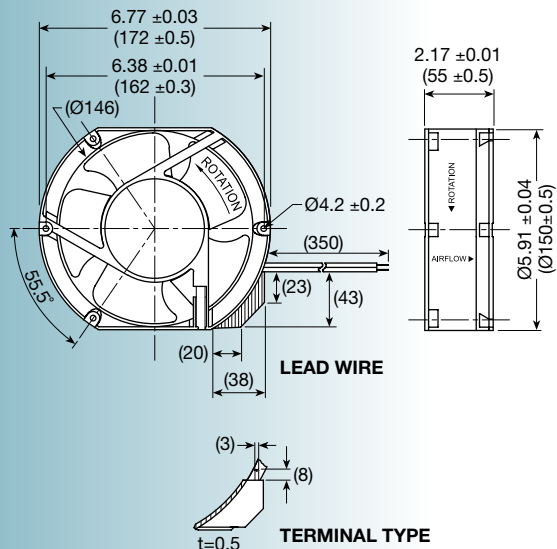

**Size: (172 x 150 x 55 mm)**  
**6.77 x 5.91 x 2.17 inches**

**Operating voltage (VAC):** 115 or 230

**Construction:** aluminum die cast frame;  
 UL94V-0 PBT impeller

**Bearing option:** motor quality ball bearings


**Motor:** permanent split capacitor

**Air flow:** exhaust over struts

**Connection:** terminal or 22 AWG lead wire

**Protection:** thermal

**Option:** IP55; IP55 + salt fog

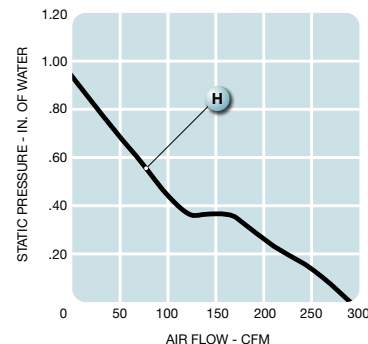

| Model No.      | Rated Voltage<br>V | Freq.<br>HZ | Input Power<br>W | Rated Cur.<br>A | Locked Cur.<br>A | Speed<br>RPM | Air Volume           |     | Max. Static Pressure (H <sub>2</sub> O) |      | Sound Noise<br>db | Weight<br>lbs |
|----------------|--------------------|-------------|------------------|-----------------|------------------|--------------|----------------------|-----|-----------------------------------------|------|-------------------|---------------|
|                |                    |             |                  |                 |                  |              | M <sup>3</sup> /Min. | CFM | MM                                      | INCH |                   |               |
| UF15KC12 - __H | 115                | 60          | 38               | 0.34            | 0.76             | 3400         | 8.3                  | 293 | 23                                      | 0.90 | 60                | 2.3           |
| UF15KC23 - __H | 230                | 60          | 38               | 0.17            | 0.38             | 3400         | 8.3                  | 293 | 23                                      | 0.90 | 60                | 2.3           |