



UF225(69)APA series

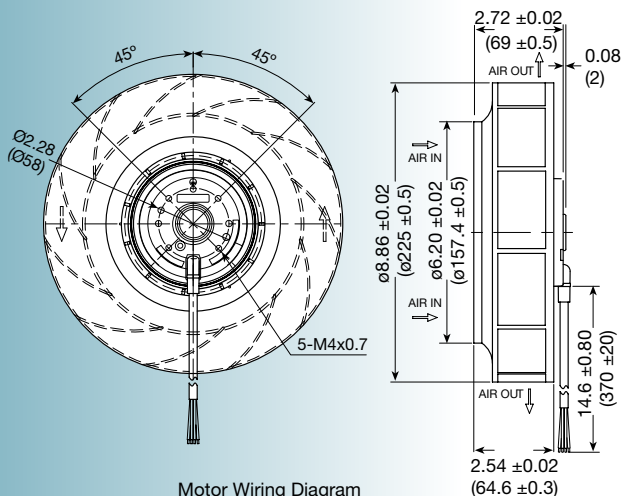

Motor Wiring Diagram

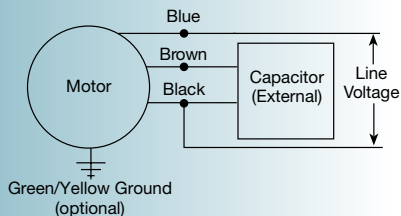

Size: (225 dia. x 69 mm)
8.86 dia. x 2.72 inches

Features: *backward curved impeller*

Operating voltage
(VAC):

115 or 230

Operating temp: -40° ~ 50°C

-40° ~ 50°C

Construction:

aluminum die cast motor base,
UL94V-0 reinforced nylon impeller

Bearing option:

motor quality ball bearings

Motor:

2 pole permanent split capacitor,
single phase

Air flow:

centrifugal

Connection:


AWM 2517 lead wires

Protection:

thermal

Insulation:

Class B

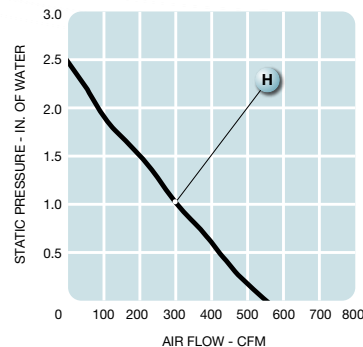

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise db	Weight kg
							M ³ /Min.	CFM	MM	INCH		
UF225(69)APA12-H1C2A	115	60	160	1.08	2.30	2950	15.6	550	58	2.3	72	2.3
UF225(69)APA23-H1C2A	230	60	157	0.54	1.15	2950	15.6	550	58	2.3	72	2.3