



HIGH PERFORMANCE F1238-Series

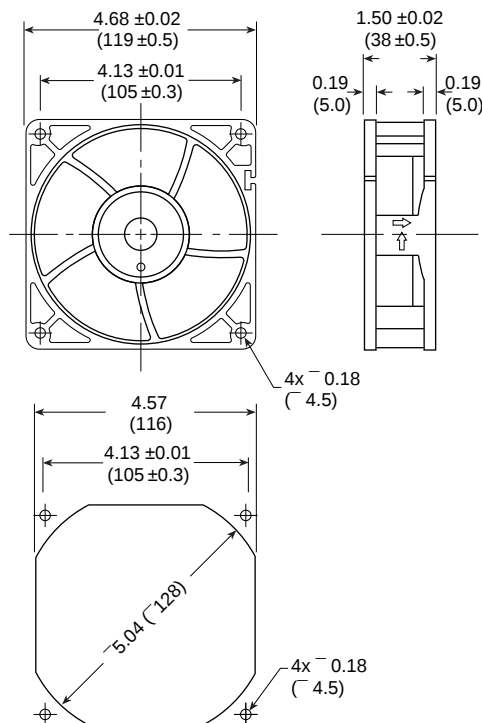

Size: (119 x 119 x 38 mm)

4.69 x 4.69 x 1.5 inches

- High Performance impeller design for maximum air flow
- Brass bearing stand
- Electronic locked rotor sensor, auto-restart, reverse polarity protection
- Lead wires or terminal version; reinforced flanged frame; ball bearings
- Options include tachometer or locked rotor output signal

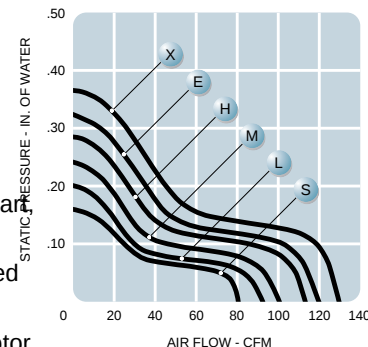

Model No.	Rated Voltage V	Current mA	Revolution RPM	Air Volume CFM	Maximum Static Pressure (in H ₂ O)	Sound Noise dBA	Weight oz
F1238S-H	5/12/24/48	520 180 90 60	2,100	81	0.16	33	9.45
F1238L-H	12/24/48	- 290 145 80	2,400	93	0.20	35	9.45
F1238M-H	12/24/48	- 360 180 120	2,700	103	0.24	38	9.45
F1238H-H	12/24/48	- 440 220 140	3,000	112	0.28	41	9.45
F1238E-H	12/24/48	- 700 350 210	3,300	121	0.33	44	9.45
F1238X-H	12/24	- 950 500 -	3,600	130	0.37	47	9.45

* Available with quick disconnect terminal block.