


Product Code: M150L24DC-AR



3"

150W LED Driver






Features

Dimmable with any standard MLVTRIAC dimmer Dual protection - primary and secondary auto-reset circuit breakers Nema 3R Enclosure - Outdoor Use

Two bottom knock-outs

ETL Listed

Certified to CSA Standard

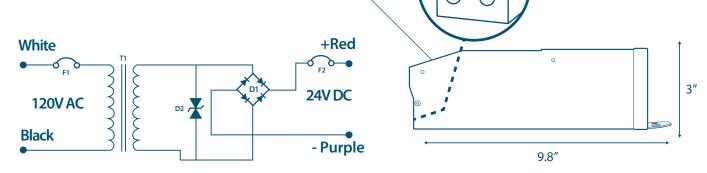

Specifications

Max Load	150W
Input Voltage	120V AC
Input Current Full Load	1.95 A
Output Voltage Full Load	22V DC
Max Output Current Full Load	13.3 A
Open Circuit Output Voltage	24.4V DC
Avg. Efficiency	85%
Power Factor on I	0.93
Coil Former	Double Section Bobbin
Thermal Class	B130°c
Leads Primary	PVC 600V #18
Leads Secondary	PVC 300V #12
Circuit Breaker	primary and secondary auto reset
Dimensions L*W*H	9.8 in. x 3 in. x 3 in.
Weight	87 Oz.



