







40W LED Driver

Outdoor & Indoor Magnetic Class 2 LED Driver

Product Code: M40L24DC-277

Magnitude's M40L24DC-277 LED Driver is the perfect choice for use in hospitals, schools, and shopping malls or for any commercial application that 277V is present. The Drivers are encased in a high-quality NEMA 3R enclosure that includes 2 knock-outs to enable easy installation. It is equipped with a push to reset breaker on the output for load protection.

Features

Push-to-reset breaker

ETL listed

CSA listed

Class 2


Commercial Use


flicker-free

Nema 3R enclosure







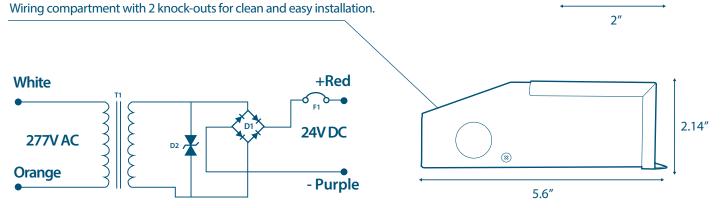

Driver's Specifications

Max Load	40W
Input Voltage	277V AC
Input Current Full Load	410 mA
Output Voltage Full Load	21.1V DC
Max Output Current Full Load	1.72 A
Open Circuit Output Voltage	24.3V DC
Efficiency on I	80%
Power Factor on I	0.89
Coil Former	Double Section Bobbin
Thermal Class	B130°c
Leads Primary	PVC 600V #20
Leads Secondary	PVC 300V #16
Circuit Breaker	secondary manual push-to-reset
Dimensions L*W*H	5.6 in. x 2 in. x 2.14 in. (142.2mm x 50.8 mm x 54.3 mm)
Weight	35 Oz.

The specifications are subject to change without notice