

50W LED Driver




Outdoor & Indoor Magnetic Class 2 LED Driver

Product Code: M50L12DC-277

Magnitude's M50L12DC-277 LED Driver is the perfect choice for use in hospitals, Schools, and shopping malls or for any commercial application that 277V is present. The Drivers are encased in a high-quality NEMA 3R enclosure that includes 2 knock-outs to enable easy installation. It is equipped with a push to reset breaker on the output for load protection.

Features

- Push-to-reset breaker
- ETL listed
- Certified to CSA Standard
- Class 2
- Commercial Use
- flicker-free
- Nema 3R enclosure
- Wiring compartment with 2 knock-outs for clean and easy installation.

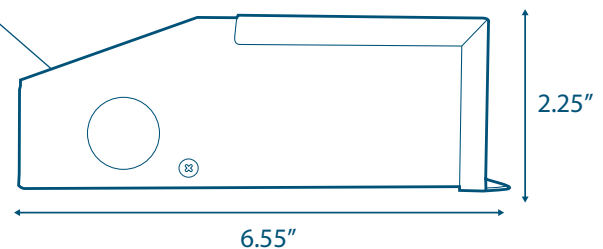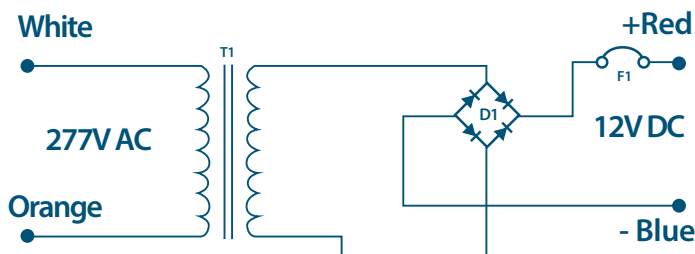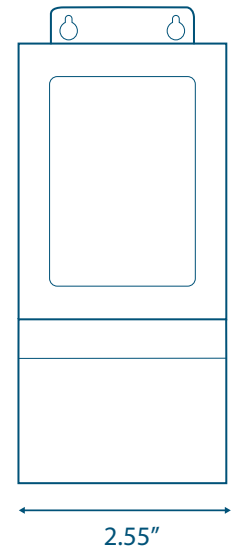

Driver's Specifications

| | |
|------------------------------|--|
| Max Load | 50W |
| Input Voltage | 277V AC |
| Input Current Full Load | 633 mA |
| Output Voltage Full Load | 11.4V DC |
| Max Output Current Full Load | 4.91 A |
| Open Circuit Output Voltage | 12.8V DC |
| Efficiency on I | 78.8% |
| Power Factor on I | 0.84 |
| Coil Former | Double Section Bobbin |
| Thermal Class | B130°C |
| Leads Primary | PVC 600V #20 |
| Leads Secondary | PVC 300V #14 |
| Circuit Breaker | secondary manual push-to-reset |
| Dimensions L*W*H | 6.55 in. x 2.25 in. x 2.55 in. (166.3 mm x 57.15 mm x 64.7 mm) |
| Weight | 50 Oz. |

The specifications are subject to change without notice