

1000W Lighting Transformer

Outdoor & Indoor Magnetic Lighting Transformer

Product Code: X1000SOD

Input leads are 18 AWG. Output leads are 12 AWG. Lead insulation is 105°C. The transformer uses a class B 130°C insulation system. The Enclosure temperature will not exceed 70°C @ 40°C ambient. Wiring compartment has 4 knockouts sized 3/4 inch screw cable connectors. The removable cover for the wiring compartment is secured in place by a clips. The enclosure is black powder coated.



Features

Manual reset thermal circuit breaker on the secondary side.

Dimmable with any standard MLV TRIAC dimmer.

UL listed file #E300404

UL standard 1012

Certified to CSA Standard

ETL Listed

NEMA 3R enclosure



Black

Orange (boost)


Input 120V 60Hz

White

T1

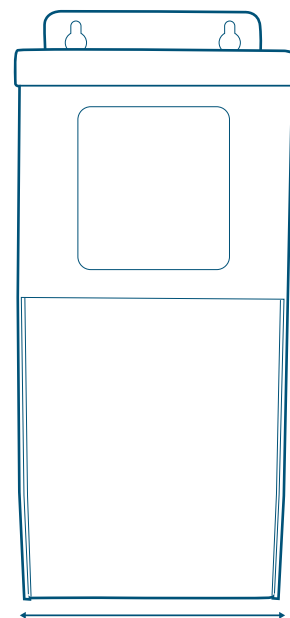

6.75"

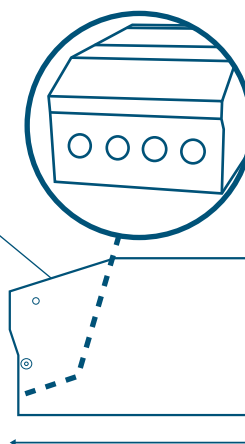

5.44"

10.6"

Specifications

Max Load	1000W
Input Voltage	120V AC
Input Current Full Load	8.3 A
Output Voltage Full Load	11.5V AC / 12.5V AC
Max Output Current Full Load	83 A / 41 A
Open Circuit Output Voltage	25V AC / 27V AC
Efficiency on I	93%
Coil Former	Double Section Bobbin
Thermal Class	B130°C
Leads Primary	PVC 600V #18
Leads Secondary	PVC 300V #12
Dimensions L*W*H	10.6 in. x 6.75 in. x 5.44 in. (269.24 mm x 171.45 mm x 138.17 mm)
Weight	30 lbs.

The specifications are subject to change without notice