

750W Lighting Transformer

Outdoor & Indoor Magnetic Lighting Transformer

Product Code: M750S24OD

Input leads are 18 AWG. Output leads are 12 AWG. Lead insulation is 105°C. The transformer uses a class B 130°C insulation system. The Enclosure temperature will not exceed 70°C @ 40°C ambient. Wiring compartment has 3 knockouts sized 3/4 inch screw cable connectors. The removable cover for the wiring compartment is secured in place by a clips. The enclosure is black powder coated.

Features

Manual reset thermal circuit breaker on the secondary side.


Dimmable with any standard MLV TRIAC dimmer.

UL listed file #E300404


UL standard 1012

CSA listed

NEMA 3R enclosure

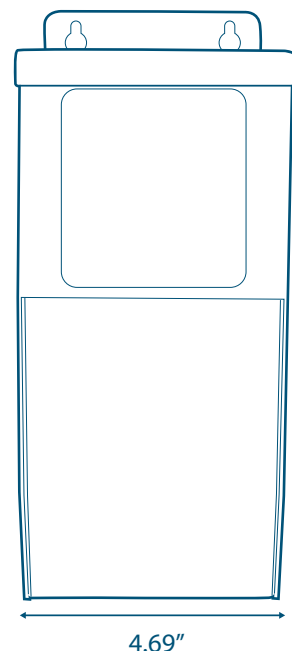


4.69"

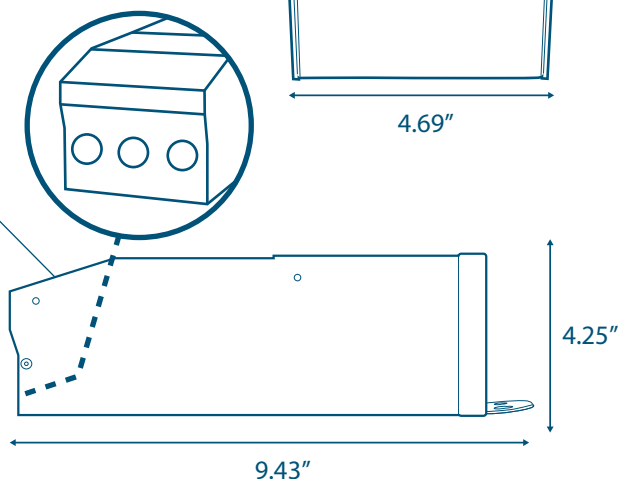

4.25"

9.43"

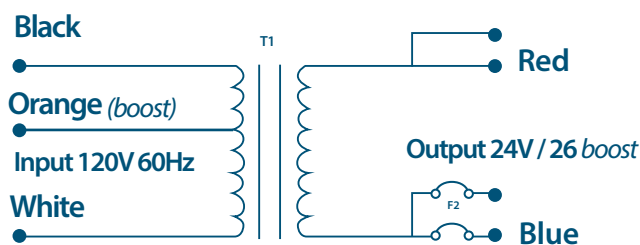

Specifications

Max Load	750W
Input Voltage	120V AC
Input Current Full Load	6.25 A
Output Voltage Full Load	23V AC / 25 V AC Boost
Max Output Current Full Load	62.5 A
Open Circuit Output Voltage	25V AC / 27 V AC Boost
Efficiency on I	91%
Coil Former	Double Section Bobbin
Thermal Class	B130°C
Leads Primary	PVC 600V #18
Leads Secondary	PVC 300V #12
Dimensions L*W*H	9.43 in. x 4.69 in. x 4.25 in. (239.5 mm x 119.12 mm x 107.95 mm)
Weight	16 lbs.

The specifications are subject to change without notice