

CN1	CN2
1	40
2	39
3	38
4	37
5	36
6	35
7	34
8	33
9	32
10	31
11	30
12	29
13	28
14	27
15	26
16	25
17	24
18	23
19	22
20	21
21	20
22	19
23	18
24	17
25	16
26	15
27	14
28	13
29	12
30	11
31	10
32	9
33	8
34	7
35	6
36	5
37	4
38	3
39	2
40	1

CN1 = IPEX 20472-040T-10 with pullbar


CN2 = IPEX 20346-40T-02 (Includes Shell)

Wire = SGC Laminate AWG 42 UL1354

LENGTH = "L" = 76MM +/- 2.5MM

Notes:

- 1- Shields of each coax to be terminated to CN1 & 2 connector shells.
- 2- Strain relieve wire and connectors

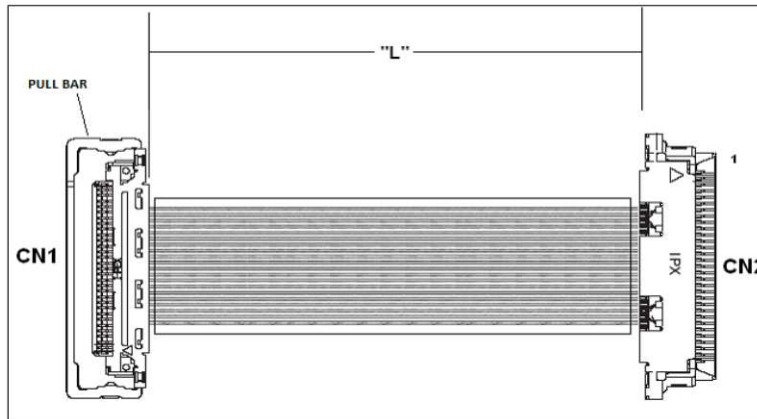

DWG BY: MHB	DATE: 1/3/11
CHK BY:	DATE:
APPR:	DATE:

DRAWINGS ARE NOT TO SCALE. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. ALL TOLERANCES ARE +/- 0.50" UNLESS OTHERWISE SPECIFIED

REVISION HISTORY			
REV		DATE	APPROVED
-	Initial Release	1/3/11	MHB



Quadrangle Products Inc.

Quadrangle Products Inc.
28 Harrison Ave Bldg 16, Suite D,
Englishtown, NJ 07726

Tel: 732-792-1234
Fax: 732-792-8305

© Copyright 2006 Quadrangle Products Inc. This document is confidential and proprietary to Quadrangle Products Inc. and shall not be reproduced, copied, used, or issued as the basis of manufacturing and/or sale of equipment, material, or any other item. Quadrangle Products Inc. has the sole and exclusive ownership rights to this document and information contained herein.

SGC1022