

# Medium Bi-Pin Lampholders

## For 400 and 800mA Lamps



### 534K™ Series Snap-In Lampholders

#### Specifications

**Rating:** 660 Watts, dual rated 600 V or 1000 V

**Listing:** UL File No. E-13408;

UL Listed for outdoor use in enclosed signs and fixtures

**Mounting:** Snap-In

#### Materials

**Housing:** White urea

**Contacts:** Silver-plated phosphor bronze

**Gasket:** Blue silicone treated neoprene


**Termination:** Lead wires 9" (228.6 mm) long, 1 stranded and tinned lead wires, 1/2" stri standard. Wire rated: AWM 1000 V, 90°C (194°F).

534.1K™  
Spring Loaded



The Blue "O" Ring is a registered trademark of Voltarc®

534.2K™  
Stationary

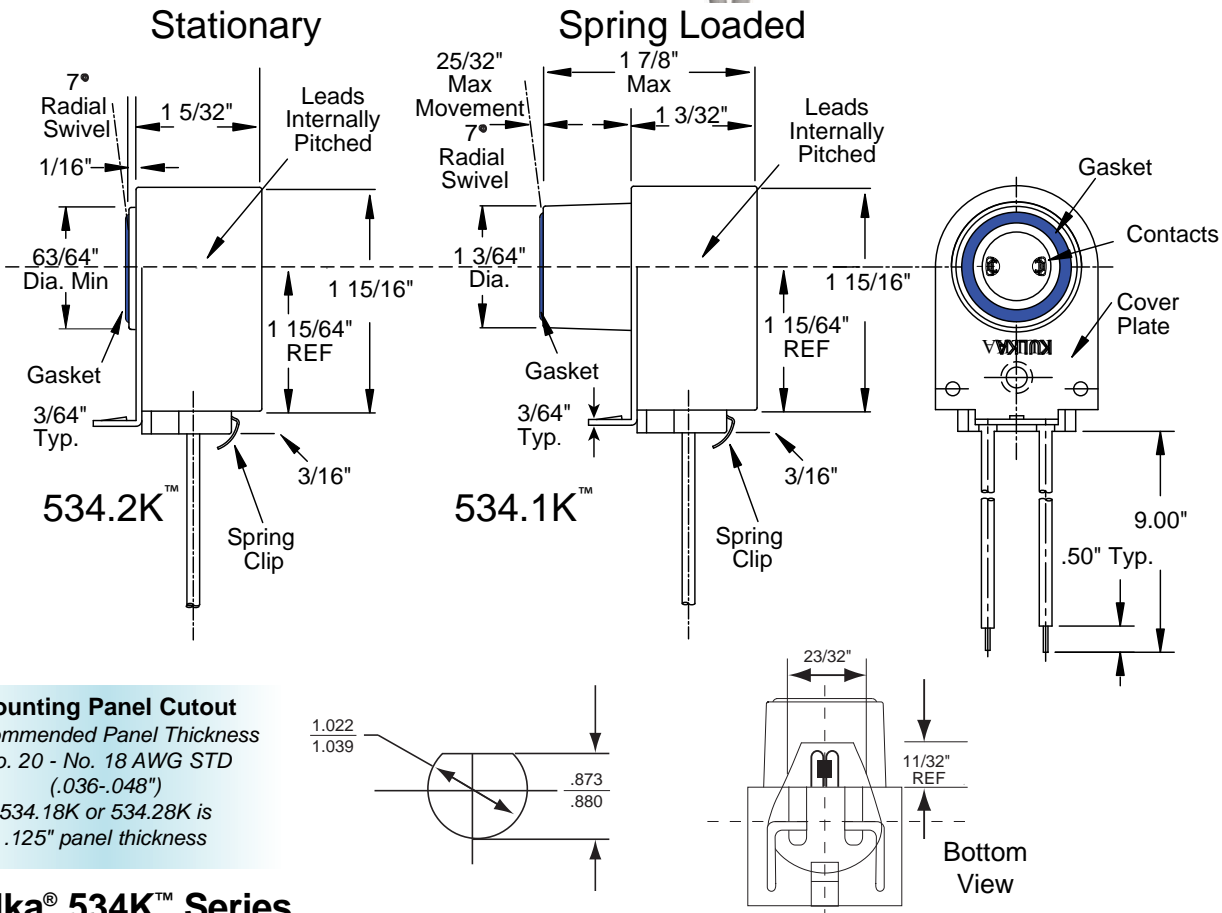

**Mounting Panel Cutout**  
Recommended Panel Thickness  
No. 20 - No. 18 AWG STD  
(.036-.048")  
534.18K or 534.28K is  
.125" panel thickness

### Kulka® 534K™ Series

Spring Part No.	Stationary Part No.
-----------------	---------------------

534.1K	534.2K	Snap-in mounting, 9" long leadwires. Pitch and gasket are standard
534.18K	534.28K	Snap-in mounting, 9" long leadwires. .125" Panel thickness, pitch and gasket are standard

Packed 200/ box. **Special lead wire lengths available upon request, consult sales department.**