

# MOX-SPI-4D11 SERIES



**MoxiE**  
INDUCTOR CORPORATION

## SURFACE MOUNT UNSHIELDED POWER INDUCTORS

MoxiE's SPI-4D11 series of surface mount power inductors offers a low DC resistance and are suitable for high current applications.

### Features:

- Low Cost.
- Ideal for a variety of DC-DC converter inductor applications.
- RoHS Compliant.
- Suitable for high currents.
- Low DC resistance.
- High heat resistance.
- Packaging: Tape & Reel (2000 pieces per reel)



## NOTES

---

---

---

---

---

---

---


---

---

---



## MECHANICAL DIMENSIONS

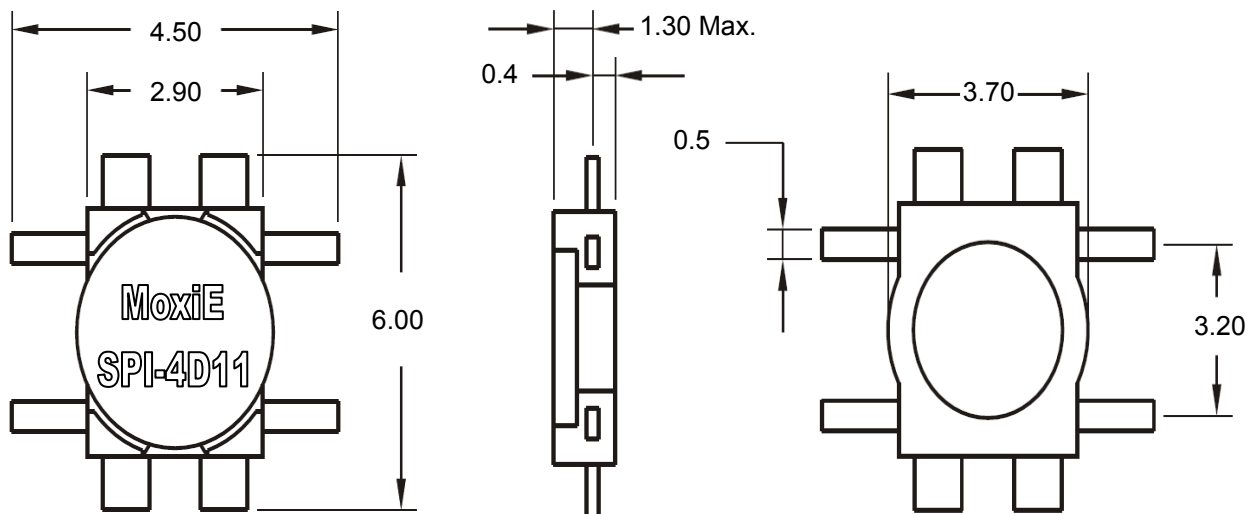


# MOX-SPI-4D11 SERIES



**MoxiE**  
INDUCTOR CORPORATION



## LANDING PATTERN

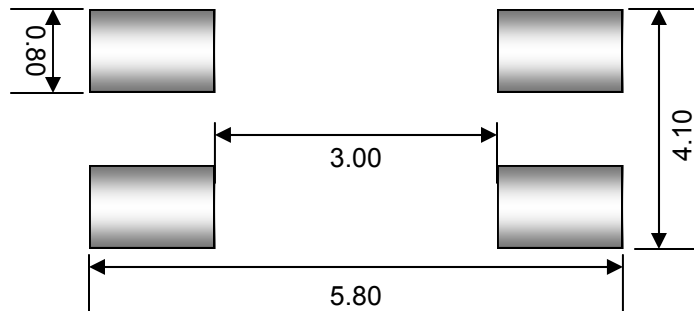

## ELECTRICAL SPECIFICATIONS

MoxiE Part Number	Inductance ( $\mu\text{H}$ )	Tolerance (%)	Test Frequency	DCR ( $\Omega$ Max.)	IDC (A Max.)
MOX-SPI-4D11-2R2M	2.2	20% (M)	100 KHz	0.117	0.97
MOX-SPI-4D11-3R3M	3.3	20% (M)	100 KHz	0.172	0.79
MOX-SPI-4D11-4R7M	4.7	20% (M)	100 KHz	0.213	0.77
MOX-SPI-4D11-6R8M	6.8	20% (M)	100 KHz	0.294	0.65
MOX-SPI-4D11-100M	10	20% (M)	100 KHz	0.454	0.52
MOX-SPI-4D11-120M	15	20% (M)	100 KHz	0.673	0.43
MOX-SPI-4D11-220M	22	20% (M)	100 KHz	1.062	0.32
MOX-SPI-4D11-330M	33	20% (M)	100 KHz	1.644	0.26
MOX-SPI-4D11-470M	47	20% (M)	100 KHz	2.841	0.20



## MOX-SPI-4D11 ENGINEERING NOTES

- Rated current L value drop 10% typ. At Idc against initial value.
- Temperature rise: 40° max.
- Solderability: 75% of the lead wire shall be covered.
- Soldering methods: Wave & reflow
- Operating temperature: -25°C to +85°C.
- Storage temperature: -55°C to +125°C.
- Terminal bending strength: 24.5N minimum.
- MoxiE Inductor Corporation specifications are subject to change without notice.