


MECHANICAL

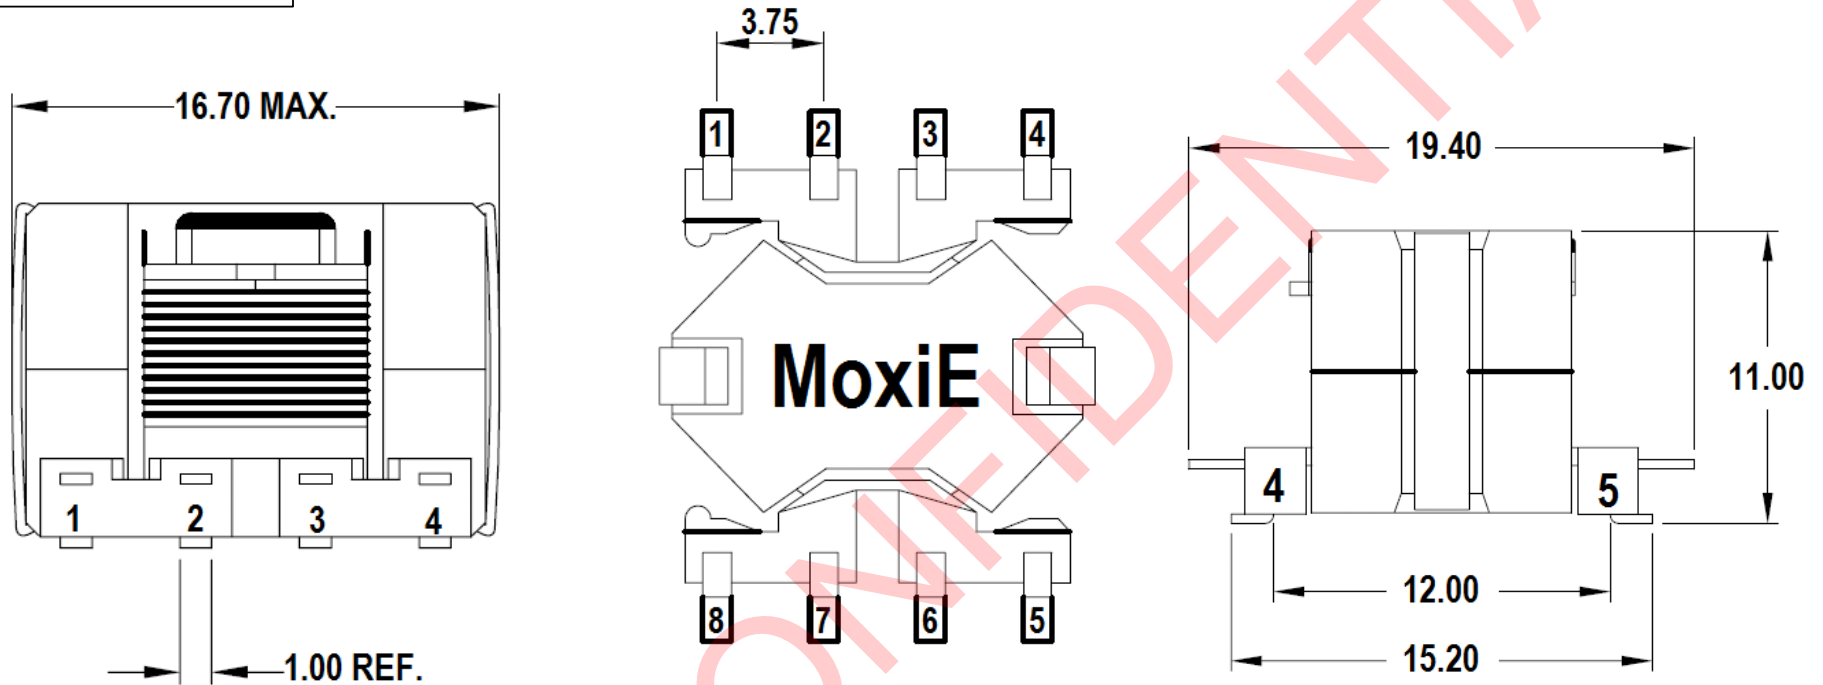

MOXIE NOTES:

- OPERATING TEMPERATURE: -40°C TO +105°C.
- INSULATION CLASS: B (RATED TO +130°C).
- BOBBIN MATERIAL: HIGH TEMPERATURE PHENOLIC.
- CORE MATERIAL: RM5.
- WIRE MATERIAL: POLYURETHANE DD (2UEW).
- EXPOXY: 9001A/B.
- CLIP: RM5.
- MOXIE INDUCTOR CORPORATION SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
- MOXIE INDUCTOR CORPORATION CUSTOM DESIGNS ARE SUBJECT TO UNITED STATES PATENT AND OR COPYRIGHT PROTECTION(S).

MOXIE INDUCTOR CORPORATION

(888)535.5207 WWW.MOXIEINDUCTORS.COM

SURFACE MOUNT HIGH FREQUENCY TRANSFORMER

MOXIE CUSTOM DESIGNS AVAILABLE

MOXIE PART NUMBER: MOX-TRFH-1916


PAGE 1/2

REV. A

DWG NO: MOXTRFH1916

ELECTRICAL

MOXIE PART NUMBER	INDUCTANCE (L)	TEST FREQUENCY	DCR @ 25°C
MOX-TRFH-1916	L: (1~4) = 2.40μH~2.8μH	10KHz @ 0.02V	(1~4) TIE: 2.3 = 26mΩ MAX.
	L: (2~3) = 2.40μH~2.8μH	10KHz @ 0.02V	(5~7) TIE: 6.8 = 32mΩ MAX.
	L: (5~8) = 2.40μH~2.8μH	10KHz @ 0.02V	
	L: (6~7) = 2.40μH~2.8μH	10KHz @ 0.02V	

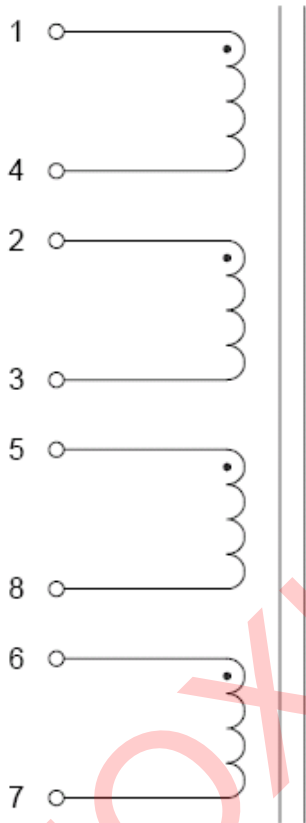

MOXIE INDUCTOR CORPORATION

(888)535.5207 WWW.MOXIEINDUCTORS.COM

SURFACE MOUNT HIGH FREQUENCY TRANSFORMER

MOXIE CUSTOM DESIGNS AVAILABLE

MOXIE PART NUMBER: MOX-TRFH-1916

PAGE 2/2

REV. A

DWG NO: MOXTRFH1916