


MECHANICAL

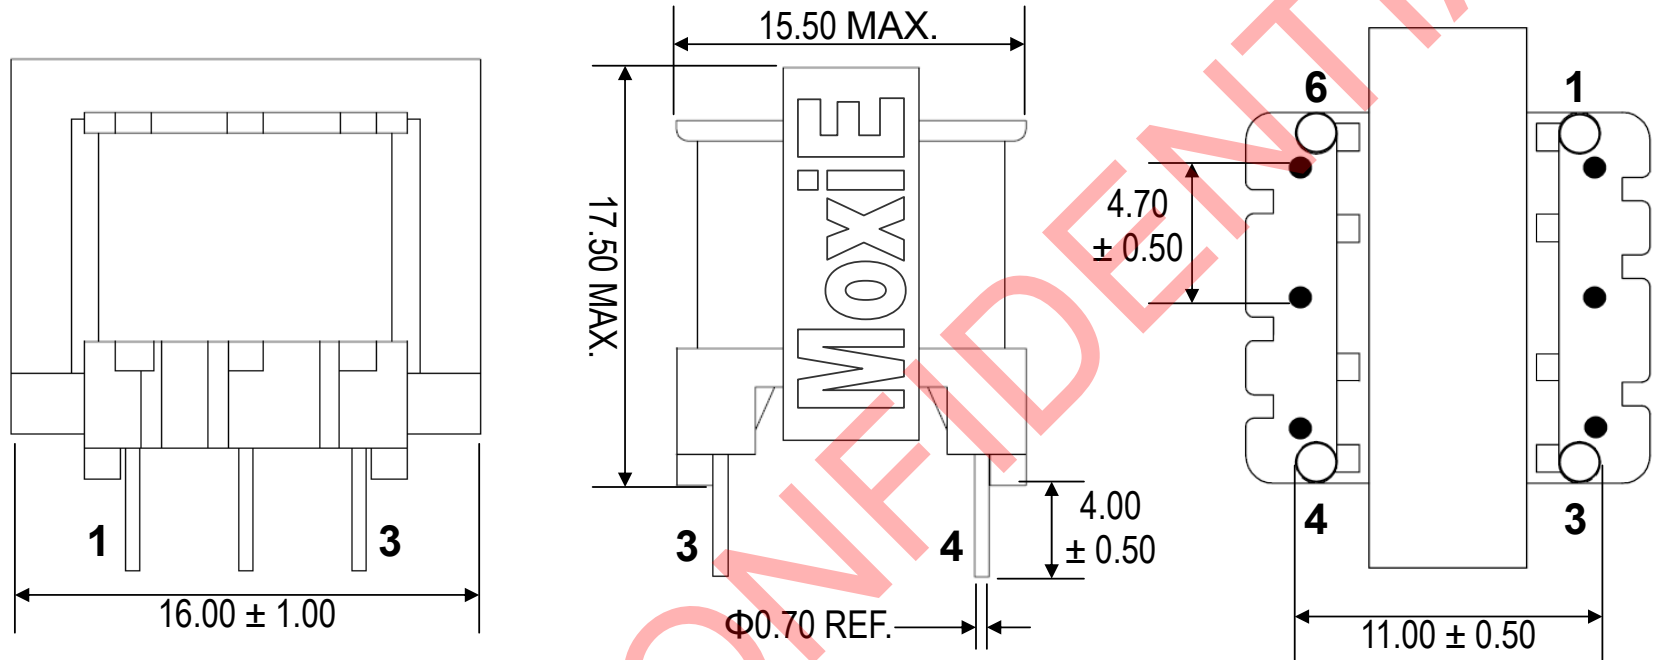

MOXIE NOTES:

- RoHS COMPLIANT
- BOBBIN MATERIAL: INDUSTRIAL GRADE PHENOLIC
- CORE MATERIAL: MOXIE HIGH TEMPERATURE EI19 CORE
- VARNISH: JOHN C DOLPH - SYNTHITE AC-43
- WIRE: POLYURETHANE (UEW)
- NOMEX: REINFORCED 5MM
- INSULATION CLASS: B (RATED TO 130°C)
- OPERATING TEMPERATURE: -25°C TO +105°C
- STORAGE TEMPERATURE: -40°C TO +125°C
- MOXIE INDUCTOR CORPORATION CUSTOM DESIGNS AVAILABLE.
- MOXIE INDUCTOR CORPORATION SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

MOXIE INDUCTOR CORPORATION

(888)535.5207 WWW.MOXIEINDUCTORS.COM

HIGH FREQUENCY TRANSFORMER


MOXIE PART NUMBER: MOX-TRFH-E19

PAGE 1/2

REV. A

DWG NUMBER: MOXTRFHE19

ELECTRICAL

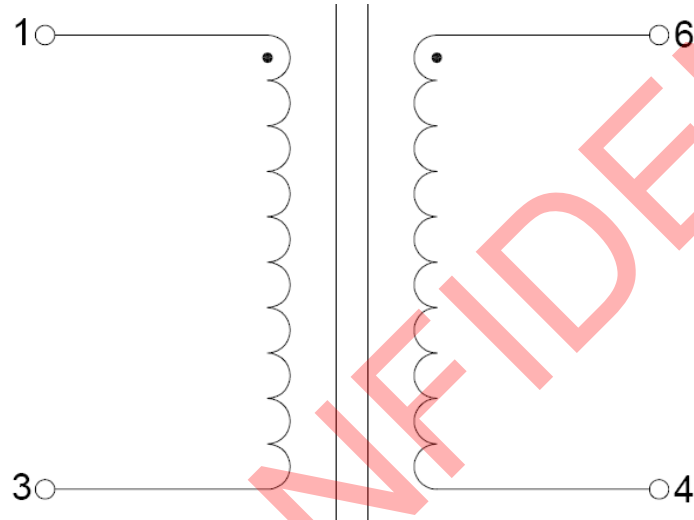

MOXIE PART NUMBER	IMPEDANCE (Z) $\pm 15\%$	TEST CONDITION	TEST FREQUENCY	DCR @ 25°C
MOX-TRFH-E19	Z : (1~3) = 600Ω	LOAD: 6~4 = 4700	1KHz @ 1V	(1~3) = 150Ω MAX. (6~4) = 150Ω MAX.

MOXIE INDUCTOR CORPORATION
 (888)535.5207 WWW.MOXIEINDUCTORS.COM

HIGH FREQUENCY TRANSFORMER

MOXIE PART NUMBER: MOX-TRFH-E19

PAGE 2/2

REV. A

DWG NUMBER: MOXTRFHE19