


ISM420 SiRFstarIV™ SIP GPS Module



Introduction

[Inventek Systems](#) would like to announce a new [SiRFstar IV](#) SIP GPS Receiver Module with **twice** the sensitivity of the SiRFstar III. Several key features about this module are:

- ✚ The module is capable of generating and storing extended ephemeris data to an external device for much faster hot starts in weak signal environments.
- ✚ Built in jamming detection and mitigation to permit fast and accurate navigation solutions in high noise environments.
- ✚ Ability to use an external mems device for wakeup when motion is detected, thus reducing power consumption for tracking devices.
- ✚ An addition 3 dB in sensitivity over the world class SiRF Star III devices.
- ✚ < 10 mW @ 1.8 volts required to maintain fixes in TricklePower mode for the ultimate in low power requirements.


The [Inventek](#) ISM420 is a 48 channel global positioning system (GPS) receiver in a very compact Surface Mount Device (SMD) GPS module with high sensitivity, high gain, and low power. The small form factor [GPS](#) receiver is designed for a broad spectrum of OEM applications and is based on the fast and deep GPS signal search capabilities of [CSR](#) SiRFstarIV™ architecture.

Ordering Information

Device	Description	Ordering Number
ISM420	GPS Module, Form Factor 1, Commercial Temp	ISM420R1-CT
ISM420EVB	Evaluation Board, UART/SDIO/SPI, ISM420	ISM420R-EVB
ISM420INT	Interposer Board, DIP,UART, ISM420	ISM420R-INT

Features

- Host UART or SPI or I2C interface
- High sensitivity navigation engine (PVT) tracks as low as -163dBm
- 48 track verification channels
- SBAS (WAAS or EGNOS)
- Altered search strategy for improved weak-signal acquisition
- Client Generated Extended Ephemeris
- Input I/O +3.3 V tolerant
- Single power supply voltage 1.8V.
- Better identification and dismissal of jamming signals through enhanced Carrier Wave (CW) detection.
- Anti-jamming Features dismissal of jamming signals
- Removes in-band jammers up to 80 dB-Hz
- Tracks up to 8 CW jammers
- Incremental ephemeris collection allowing quicker time-to-first-fix TTFF.
- Lead Free Design which is compliant with ROHS requirements
- Shielded Module

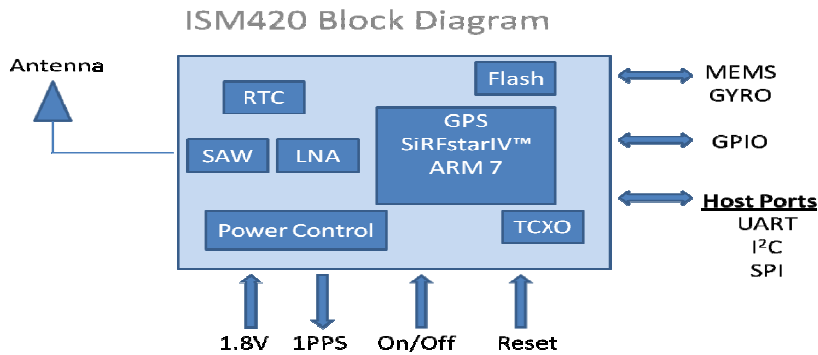

Applications

- Industrial Handhelds
- Hand-held Device for Personal Positioning and Navigation
- PDA, Pocket PC, computing devices
- Fleet Management / Asset Tracking
- AVL and Location-Based Services
- Cellular handsets
- Cameras, Asset tracking

Package

- 9.5 mm x 10.5mm x 2.4mm
- 24-pin LGA, 1.33mm pitch

Power Ratings

- Single supply voltage: 1.8VDC $\pm 5\%$
- Trickle Power : <10 mW
- Current: 45mA with LNA at full power

Temperature Range

- Operating: -30°C to +85°C
- Storage: -40°C to +85°C
- Humidity: 10% to 95%, Non-condensing

Receiver Sensitivity

- Tracking Mode: -163dBm
- Course-aided : -158dBm
- Autonomous Mode: -148dBm

Tracking and Autonomous Acquisition Sensitivity specs were determined through the use of 12 Channel Spirent GPS Simulator in a controlled RF Laboratory Environment (Open sky).

Performance

- Time to first Fix Hot Start: 1 sec.
- Time to first Fix Warm Start : <35 sec.
- Time to first Fix Cold Start: <35 sec.
- Re-Acquisition (Valid EE): 100 m

Host Interface

- SPI or UART or I²C

Please check www.inventeksys.com for the latest support.



Inventek Systems, LLC.
 2 Republic Road
 Billerica Ma, 01862

Inventek Systems reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. The information contained within is believed to be accurate and reliable. However Inventek Systems does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.